

Jezek, Barbi, & Antone, PLLC
Attorneys at Law

31 William F. Palmer Road, P.O. Box 376, Moodus, CT 06469

Scott W. Jezek
Deborah L. Barbi
Stephanie P. Antone
Terrance D. Lomme, of Counsel



Telephone (860) 873-1449
Facsimile (860) 873-1113
mail@jezeklaw.com

April 23, 2024

Planning & Zoning Commission
c/o Chairman Kevin Kuhr
1 Community Drive
East Hampton, CT 06424



Re: PZC – 24-003
Theodore Hintz, Jr.

Dear Commissioners:

During the colloquy between myself and your Commission members at the prior public hearing, April 3, 2024, a question was posed as to whether the lighting subject of this application required a permit from the Connecticut Department of Transportation. I responded “no” but represented I would confirm that.

In a telephone conversation on, April 4, 2024, with Gary Brigham of the Connecticut Department of Transportation office in Norwich (which office covers East Hampton), I was advised there is no such permit requirement for lighting. Mr. Brigham may be reached at the “Permit” line at the Norwich office at (860) 823-3114.

Thank you.

Sincerely,

A handwritten signature in blue ink, appearing to read "Scott W. Jezek".

Scott W. Jezek, Esq

SWJ/ab

From: [Jezeq & Barbi](#)
To: [pbz-counter](#); [pbz-tech@easthamptonct.gov](#)
Cc: [Scott W. Jezeq](#)
Subject: FW: Hintz Application
Date: Wednesday, April 24, 2024 3:09:25 PM
Attachments: [200 Watt LED Area Flood Light](#) 28000 Lumens 5000K 100V-277V or 277V-480V.html

CAUTION:

This email originated from outside of the organization. Do not click links or open attachments unless you recognize the sender and know the content is safe. Remember to hover over any links and if you suspect the email is not legitimate or a phishing email, please contact Tom McMahon at x3363.

As per your conversation with Attorney Jezeq, please see the contents below for you to review.



200 Watt LED Area Flood Light | 28000 Lumens | 5000K | 100V-277V or 277V-480V

SKU: MLLG-AG-LED-IMF-200-5-[Optic]-TR-[V] | Web ID: 1653

[View full spec sheet](#)[See product description](#)[Ask a question](#)

Watts:	200
Lumens/Watt:	140
Replaces:	400 Watt Metal Halide

Dimmable:	1-10V
Beam Angle:	60°(std), 10°, 15°, 30°, 45°
Housing:	Powder Coated Aluminum
Mounting:	Slip Fitter Trunnion
Dimensions:	12.64 in X 12.44 in X 4.65 in
Warranty:	5 years
Rated Life:	176,000 (L70) hours

Retail Price: \$283.47

Get Contractor or Bulk Pricing

~~100V-277V:282~~ In Stock

Arica Baptiste
Administrative Assistant

Jezeq, Barbi, & Antone, PLLC
Attorneys at Law
31 William F. Palmer Road
P.O. Box 376
Moodus, CT 06469
Phone – (860) 873-1449
Fax – (860) 873-1113
Mail@Jezeqlaw.com

WIRE FRAUD ALERT. Our office will NEVER request clients to wire funds in connection with their transaction. DO NOT WIRE FUNDS TO OUR ACCOUNTS WITHOUT PERSONALLY SPEAKING TO ONE OF OUR ATTORNEYS FIRST.


CONFIDENTIAL NOTE: This communication, including attachments, may contain information that is confidential and protected by the attorney/client or other privileges. It constitutes non-public information intended to be conveyed only to the designated recipient(s). If the reader or recipient of this communication is not the intended recipient, an employee or agent of the intended recipient who is responsible for delivering it to the intended recipient, or you believe that you have received this communication in error, please notify the sender immediately by return e-mail and promptly delete this e-mail, including attachments without reading or saving them in any manner. The unauthorized use, dissemination, distribution, or reproduction of this e-mail, including attachments, is prohibited and may be unlawful. Receipt by anyone other than the intended recipient(s) is not a waiver of any attorney/client or other privilege.

This electronic message is a public record as defined by the Connecticut Freedom of Information Act Section 1-200(5). A copy of this message and any reply will be retained by the Town of East Hampton and will be accessible to the public unless exempted by law.

Photometrics Pro

Luminaire Photometric Report

Filename: MLLG-AG-LED-IMF-200-5-TR-45D-VISOR_IES2002
Manufacturer: MLLG/DRK Ent.
Luminaire: MLLG-AG-LED-IMF-200-5-TR-45D+VISOR
Lamp: SE505
Lamp Output: 1 lamp, rated Lumens/lamp: 26800
Max Candela: 45,431.5 at Horizontal: 45°, Vertical: 1°
Input Wattage: 201.2
Luminous Opening: Rectangle (L: 4.13", W: 10.04")
Test Date: 2019-06-11
Photometry: Type C
Nema Type: 5 X 4

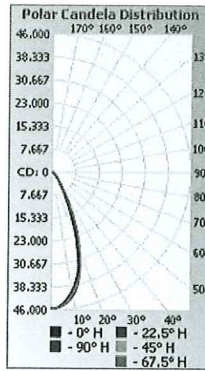

Roadway Summary

Cutoff Classification:	CUTOFF
Distribution:	TYPE I, VERY SHORT
Max Cd, 90 Deg Vert:	163.2
Max Cd, 80 to <90 Deg:	233.2
	Lumens % Lamp
Downward Street Side:	12,613.8 47.1%
Downward House Side:	14,186.2 52.9%
Downward Total:	26,800.0 100%
Total Lumens:	26,800.0 100%

Flood Summary




	Efficiency	Lumens	Horizontal Spread	Vertical Spread
Field (10%):	86.6%	23,220.1	74.4	69.9
Beam (50%):	53.6%	14,369.1	43.2	41.4
Total:	100%	26,807.8		

Zonal Lumen Summary

Zone	Lumens	% Lamp	% Luminaire
0-30	20,745.9	77.4%	77.4%
0-40	24,088.8	89.9%	89.9%
0-60	26,162.7	97.6%	97.6%
60-90	633.8	2.4%	2.4%
0-90	26,796.4	100%	100%

Lumens Per Zone

Zone	Lumens	% Total
0-10	4,090.5	15.3%
10-20	9,267.3	34.6%
20-30	7,388.1	27.6%
30-40	3,342.9	12.5%
40-50	1,390.3	5.2%
50-60	683.6	2.6%
60-70	377.8	1.4%
70-80	183.6	0.7%
80-90	72.4	0.3%

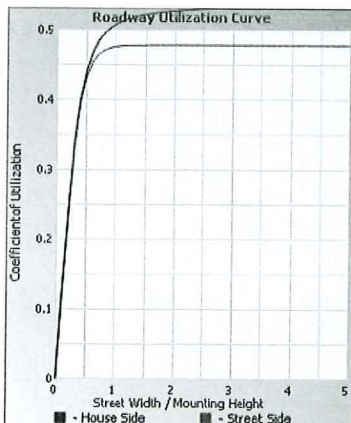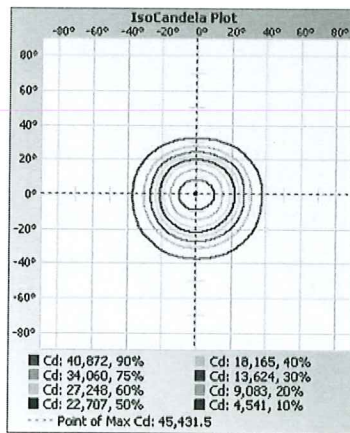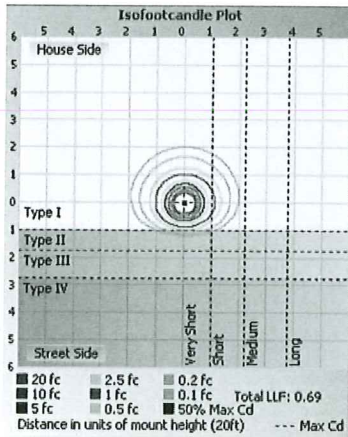

Height	Illuminance at a Distance	
	Center Beam fc	Beam Width
17.0ft	157 fc	12.8 ft 13.5 ft
34.0ft	39.3 fc	25.7 ft 26.9 ft
51.0ft	17.5 fc	38.5 ft 40.4 ft
68.0ft	9.82 fc	51.4 ft 53.9 ft
85.0ft	6.28 fc	64.2 ft 67.4 ft
102.0ft	4.36 fc	77.0 ft 80.8 ft

■ Vert. Spread: 41.4°
 ■ Horiz. Spread: 43.2°

Coefficients of Utilization - Zonal Cavity Method

Effective Floor Cavity Reflectance: 20%

RCC %:	80	70	50	30	10	0
--------	----	----	----	----	----	---

RW %:	70	50	30	0	70	50	30	0	50	30	20	50	30	20	50	30	20	0
RCR: 0	1.19	1.19	1.19	1.19	1.16	1.16	1.16	1.00	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1	1.14	1.11	1.08	1.06	1.11	1.09	1.06	.94	1.05	1.03	1.01	1.01	.99	.98	.97	.96	.95	.94
2	1.08	1.03	.99	.96	1.06	1.02	.98	.88	.98	.95	.93	.95	.93	.91	.93	.91	.89	.87
3	1.03	.97	.92	.88	1.01	.95	.91	.83	.93	.89	.86	.90	.87	.85	.88	.85	.83	.82
4	.98	.91	.86	.81	.96	.90	.85	.78	.88	.83	.80	.86	.82	.79	.84	.81	.78	.77
5	.94	.86	.80	.76	.92	.85	.79	.73	.83	.78	.75	.81	.77	.74	.80	.76	.74	.72
6	.89	.81	.75	.71	.88	.80	.75	.69	.79	.74	.70	.77	.73	.70	.76	.72	.70	.68
7	.85	.77	.71	.67	.84	.76	.71	.66	.75	.70	.66	.74	.69	.66	.73	.69	.66	.64
8	.82	.73	.67	.63	.81	.72	.67	.62	.71	.66	.63	.70	.66	.63	.69	.65	.62	.61
9	.78	.69	.64	.60	.77	.69	.64	.59	.68	.63	.60	.67	.63	.60	.66	.62	.59	.58
10	.75	.66	.61	.57	.74	.66	.61	.57	.65	.60	.57	.64	.60	.57	.63	.59	.57	.55

Reminder

We appreciate your purchase!

Please read the instruction manual before installation and keep it for future reference.

Warning

1. To avoid damage, falling, electric shock or fire, please do not modify the lamp or replace accessories without confirming with the supplier first.
2. Please authorize only qualified personnel to install the lamp and ensure they follow the instruction manual. Any improper installation might cause falling, electric shock, fire, or other injury, damage or hazard.
3. Please disconnect power before installation or any maintenance of the lamp.
4. Please disconnect power if it begins to smoke or emit odors, since fire or electric shock may occur. Ask qualified person to inspect and maintain the luminaire.
5. Please do not dismantle the lamp without the supplier's authorization.
6. Please do not touch the power supply when the lamp is operating.
7. If the external flexible cable or cord of the luminaire is damaged, it should only be replaced by the supplier, a service agent or qualified person.
8. Terminal block not included. The electrical fitting must be installed by a licensed electrician.
9. The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.
10. Only to be installed outside arms reach.
11. For use in environments where an accumulation of non-conductive dust on the luminaire may be expected.
12. Mounting heights of lights not higher than 25m.



Caution risk of electric shock

Application




With aluminum heat sink, high-brightness SMD chip, high-efficiency constant current and voltage power driver, the LED Flood Light is designed for applications in large industrial areas like airports, big docks, squares, stadiums, etc.

Technical Parameters




Product Specifications	200W	400W	600W
Input Voltage	100-277V (standard) / 277-480V (optional)		
Power Frequency	50 / 60Hz		
Outlook Dimensions	321×316×118mm (12.64"×12.44"×4.65")	419×340×222mm (16.5"×13.39"×8.74")	529×340×226mm (20.83"×13.39"×8.9")
Luminaire Net Weight	4.1±0.3kg (9.04±0.66Lbs)	9.4±0.3kg (20.72±0.66Lbs)	15.3±0.5kg (33.73±1.1Lbs)
Working Temperature	-30°C to +40°C (-22°F to +104°F)		
Storing Temperature	-40°C to +70°C (-40°F to +158°F)		

Installation Instructions




Physical Dimensions (mm/inch)




200W



400W

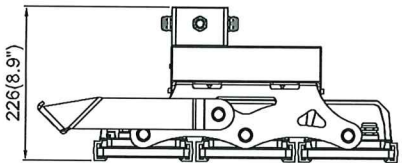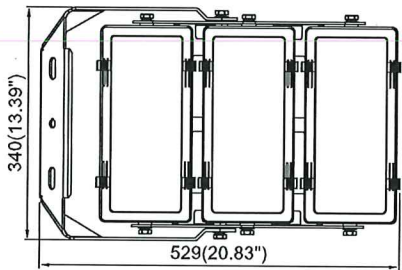

600W

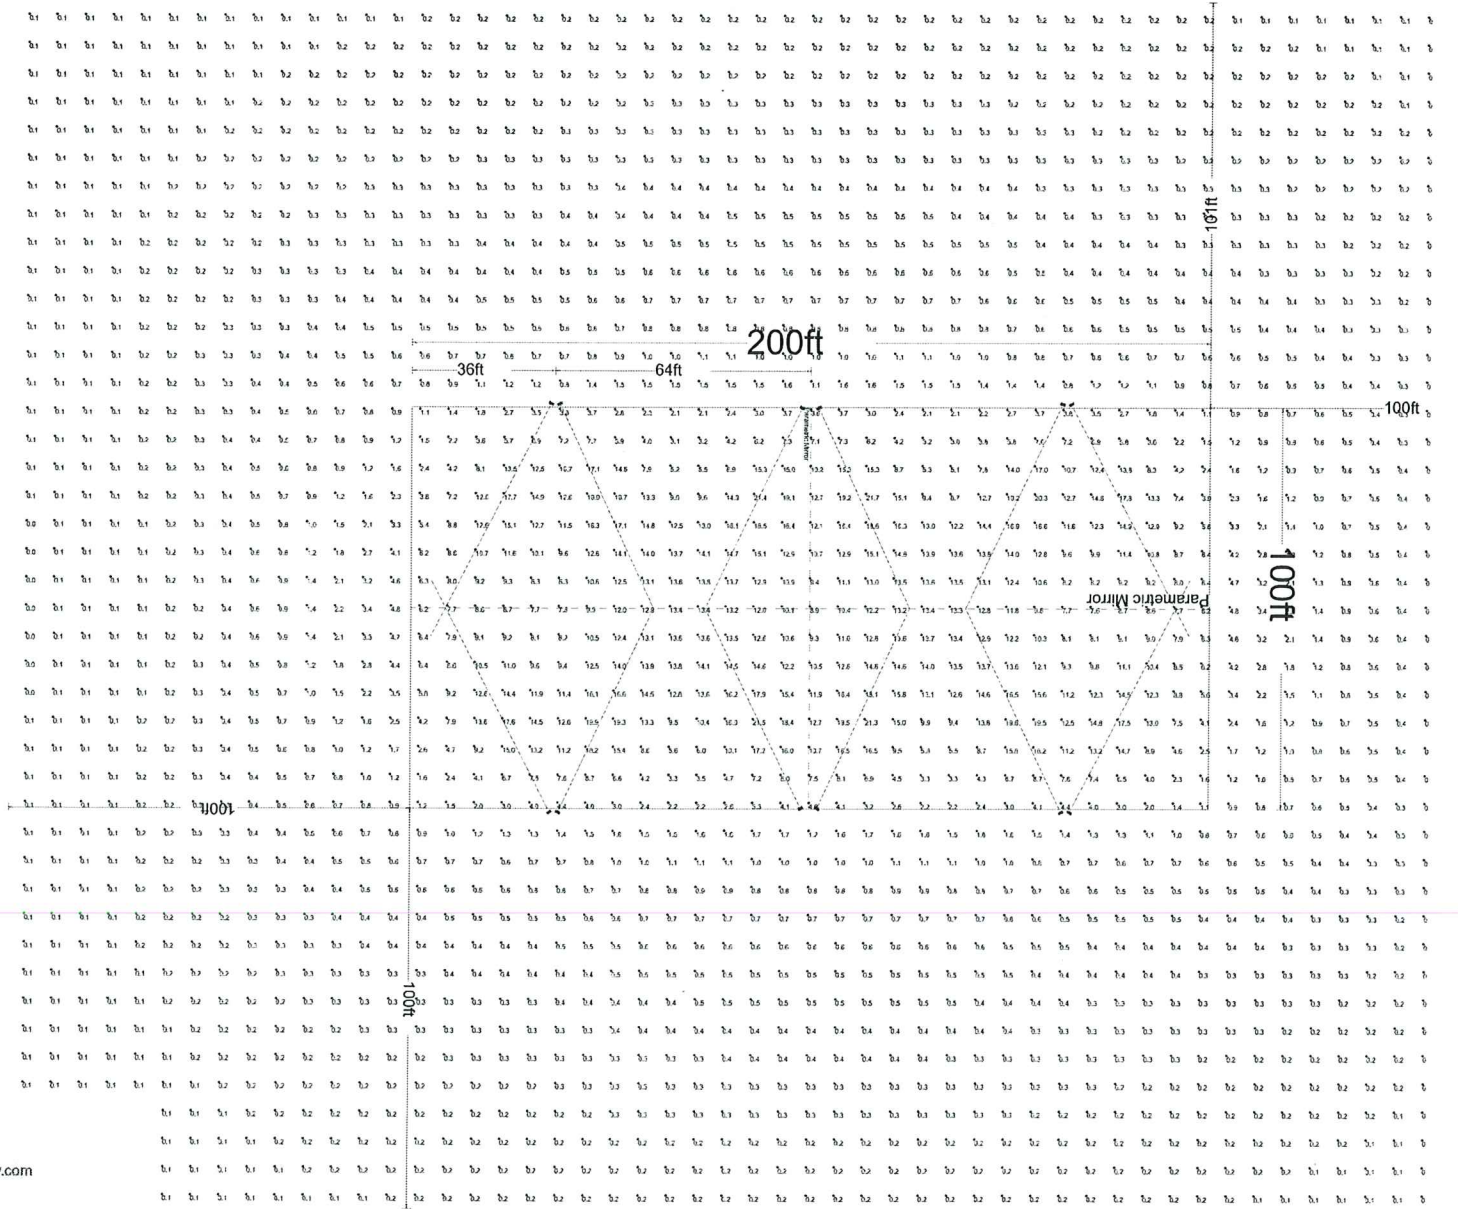

Joe Hawkins
Lighting Specialist

617-468-7352
 jhawkins@ledlightingsupply.com
 ledlightingsupply.com
 Get A Lighting Plan Or Quote