

Site Development Plan

Salt Pond Apartments at Edgewater Hill

Prepared For

Edgewater Hill Enterprises, LLC

000 East High Street (CT Route 66)


East Hampton, Connecticut

December 2020

Rev. A - IWWC Comments & Stormwater Quality - 1/18/21
 Rev. B - Per IWWC Conditions of Approval - 1/29/21

Index To Drawings

Sheet No.	Sheet Title
1	Cover Sheet
2	Improvement Location and Topographic Survey
3	Lot Line Modification Plan
4	Overall Layout Plan
5	Site Layout Plan
6	Edgewater Circle Plan and Profile
7	North Loop Plan and Profile
8	South Loop Plan and Profile
9	Grading Plan
10	Stormwater Management Plan
11	Building Drainage Plan
12	Utilities Plan
13	Landscaping Plan
14	Sight Line Plan and Profiles
15	Retaining Wall Profiles
16	Erosion and Sedimentation Control Plan
17	Site Logistics Plan
18	Erosion and Sedimentation Control Notes
19	Erosion and Sedimentation Control Notes and Details
20	Construction Notes and Details
21	Construction Details
22	Construction Details
23	Construction Details
24	Construction Details
25	Construction Details

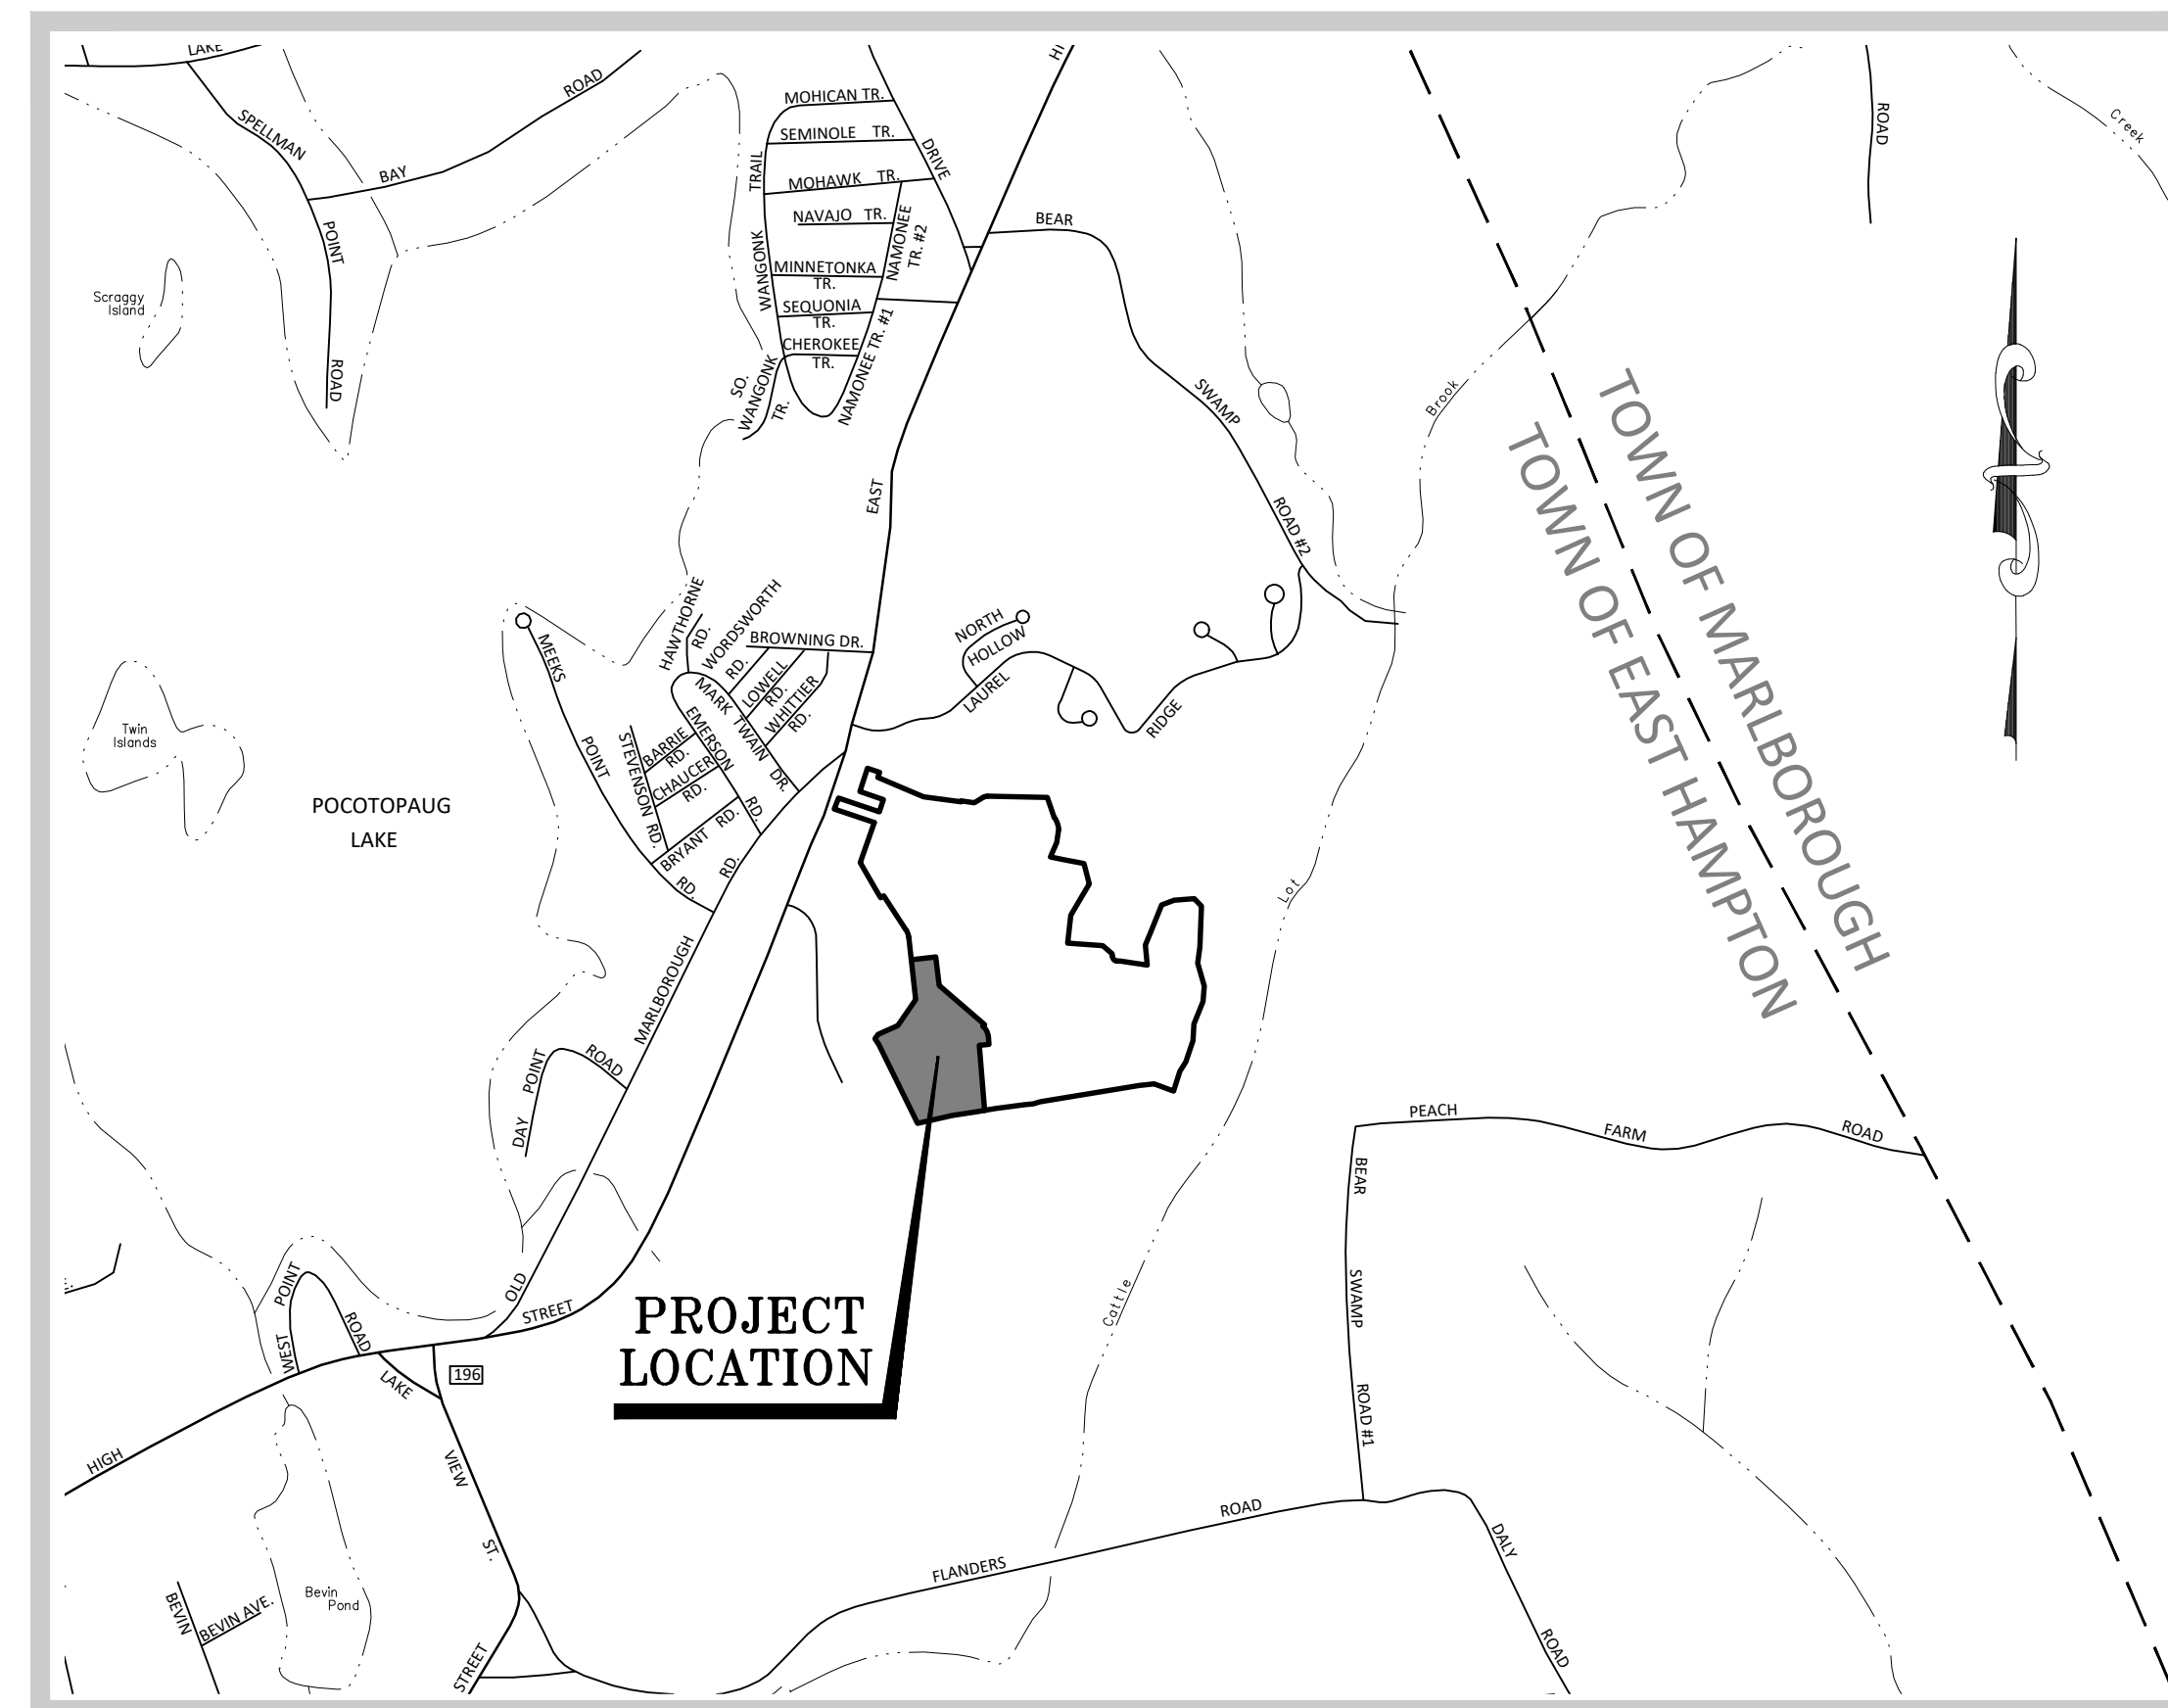

Site Location Map
 Scale: 1" = 1,000'

"APPROVED BY THE TOWN OF EAST HAMPTON PLANNING AND ZONING COMMISSION"

 SIGNATURE OF CHAIRMAN OR SECRETARY DATE

"APPROVED BY THE TOWN OF EAST HAMPTON INLAND WETLANDS AND WATERCOURSES COMMISSION"

 SIGNATURE OF CHAIRMAN OR SECRETARY DATE

Applicants/Property Owners:


Edgewater Hill Enterprises, LLC
 138 East High Street
 East Hampton, CT 06424

Property Info:

000 East High Street
 Assessor's ID: 10A/85/5C
 Area: 59.41± Acres



NOT FOR CONSTRUCTION
 1/29/2021

"TO MY KNOWLEDGE AND BELIEF THIS MAP IS SUBSTANTIALLY CORRECT AS NOTED HEREON."



LEGEND & ABBREVIATIONS

±	MORE OR LESS	x 530.0	EXISTING SPOT ELEVATION
TYP	TYPICAL	x 530.2	PROPOSED SPOT ELEVATION
PVC	POLYVINYL CHLORIDE	— —	BUILDING SETBACK LINE
RCP	REINFORCED CONCRETE PIPE	— —	EXISTING CONTOUR
HDPE	HIGH DENSITY POLYETHYLENE PIPE	— —	PROPOSED CONTOUR
SF	SQUARE FEET	— —	TREE LINE
FF	FINISH FLOOR	— —	UNDERGROUND ELECTRIC
SMH	SANITARY MANHOLE	— —	OVERHEAD WIRES
CB	CATCH BASIN	— —	SANITARY SEWER
YD	YARD DRAIN	— —	WATER
TF	TOP OF FRAME	•	ANGLE POINT
INV	INVERT	•	IRON PIN
GV	GAS VALVE	□	MONUMENT
WV	WATER VALVE	□	UTILITY POLE
HHE	HANDHOLE ELECTRIC	□	GUY WIRE
W/	WITH	□	CATCH BASIN
WF #1	WETLAND FLAG	○	YARD DRAIN
CHD	CONNECTICUT HIGHWAY DEPARTMENT	⊙	SANITARY MANHOLE
MON	MONUMENT	⊙	STORM DRAINAGE MANHOLE
REC	RECOVERED	⊙	WATER OR GAS VALVE
CL&P	CONNECTICUT LIGHT AND POWER	⊙	SIGN
N/F	NOW OR FORMERLY	△	WETLAND FLAG

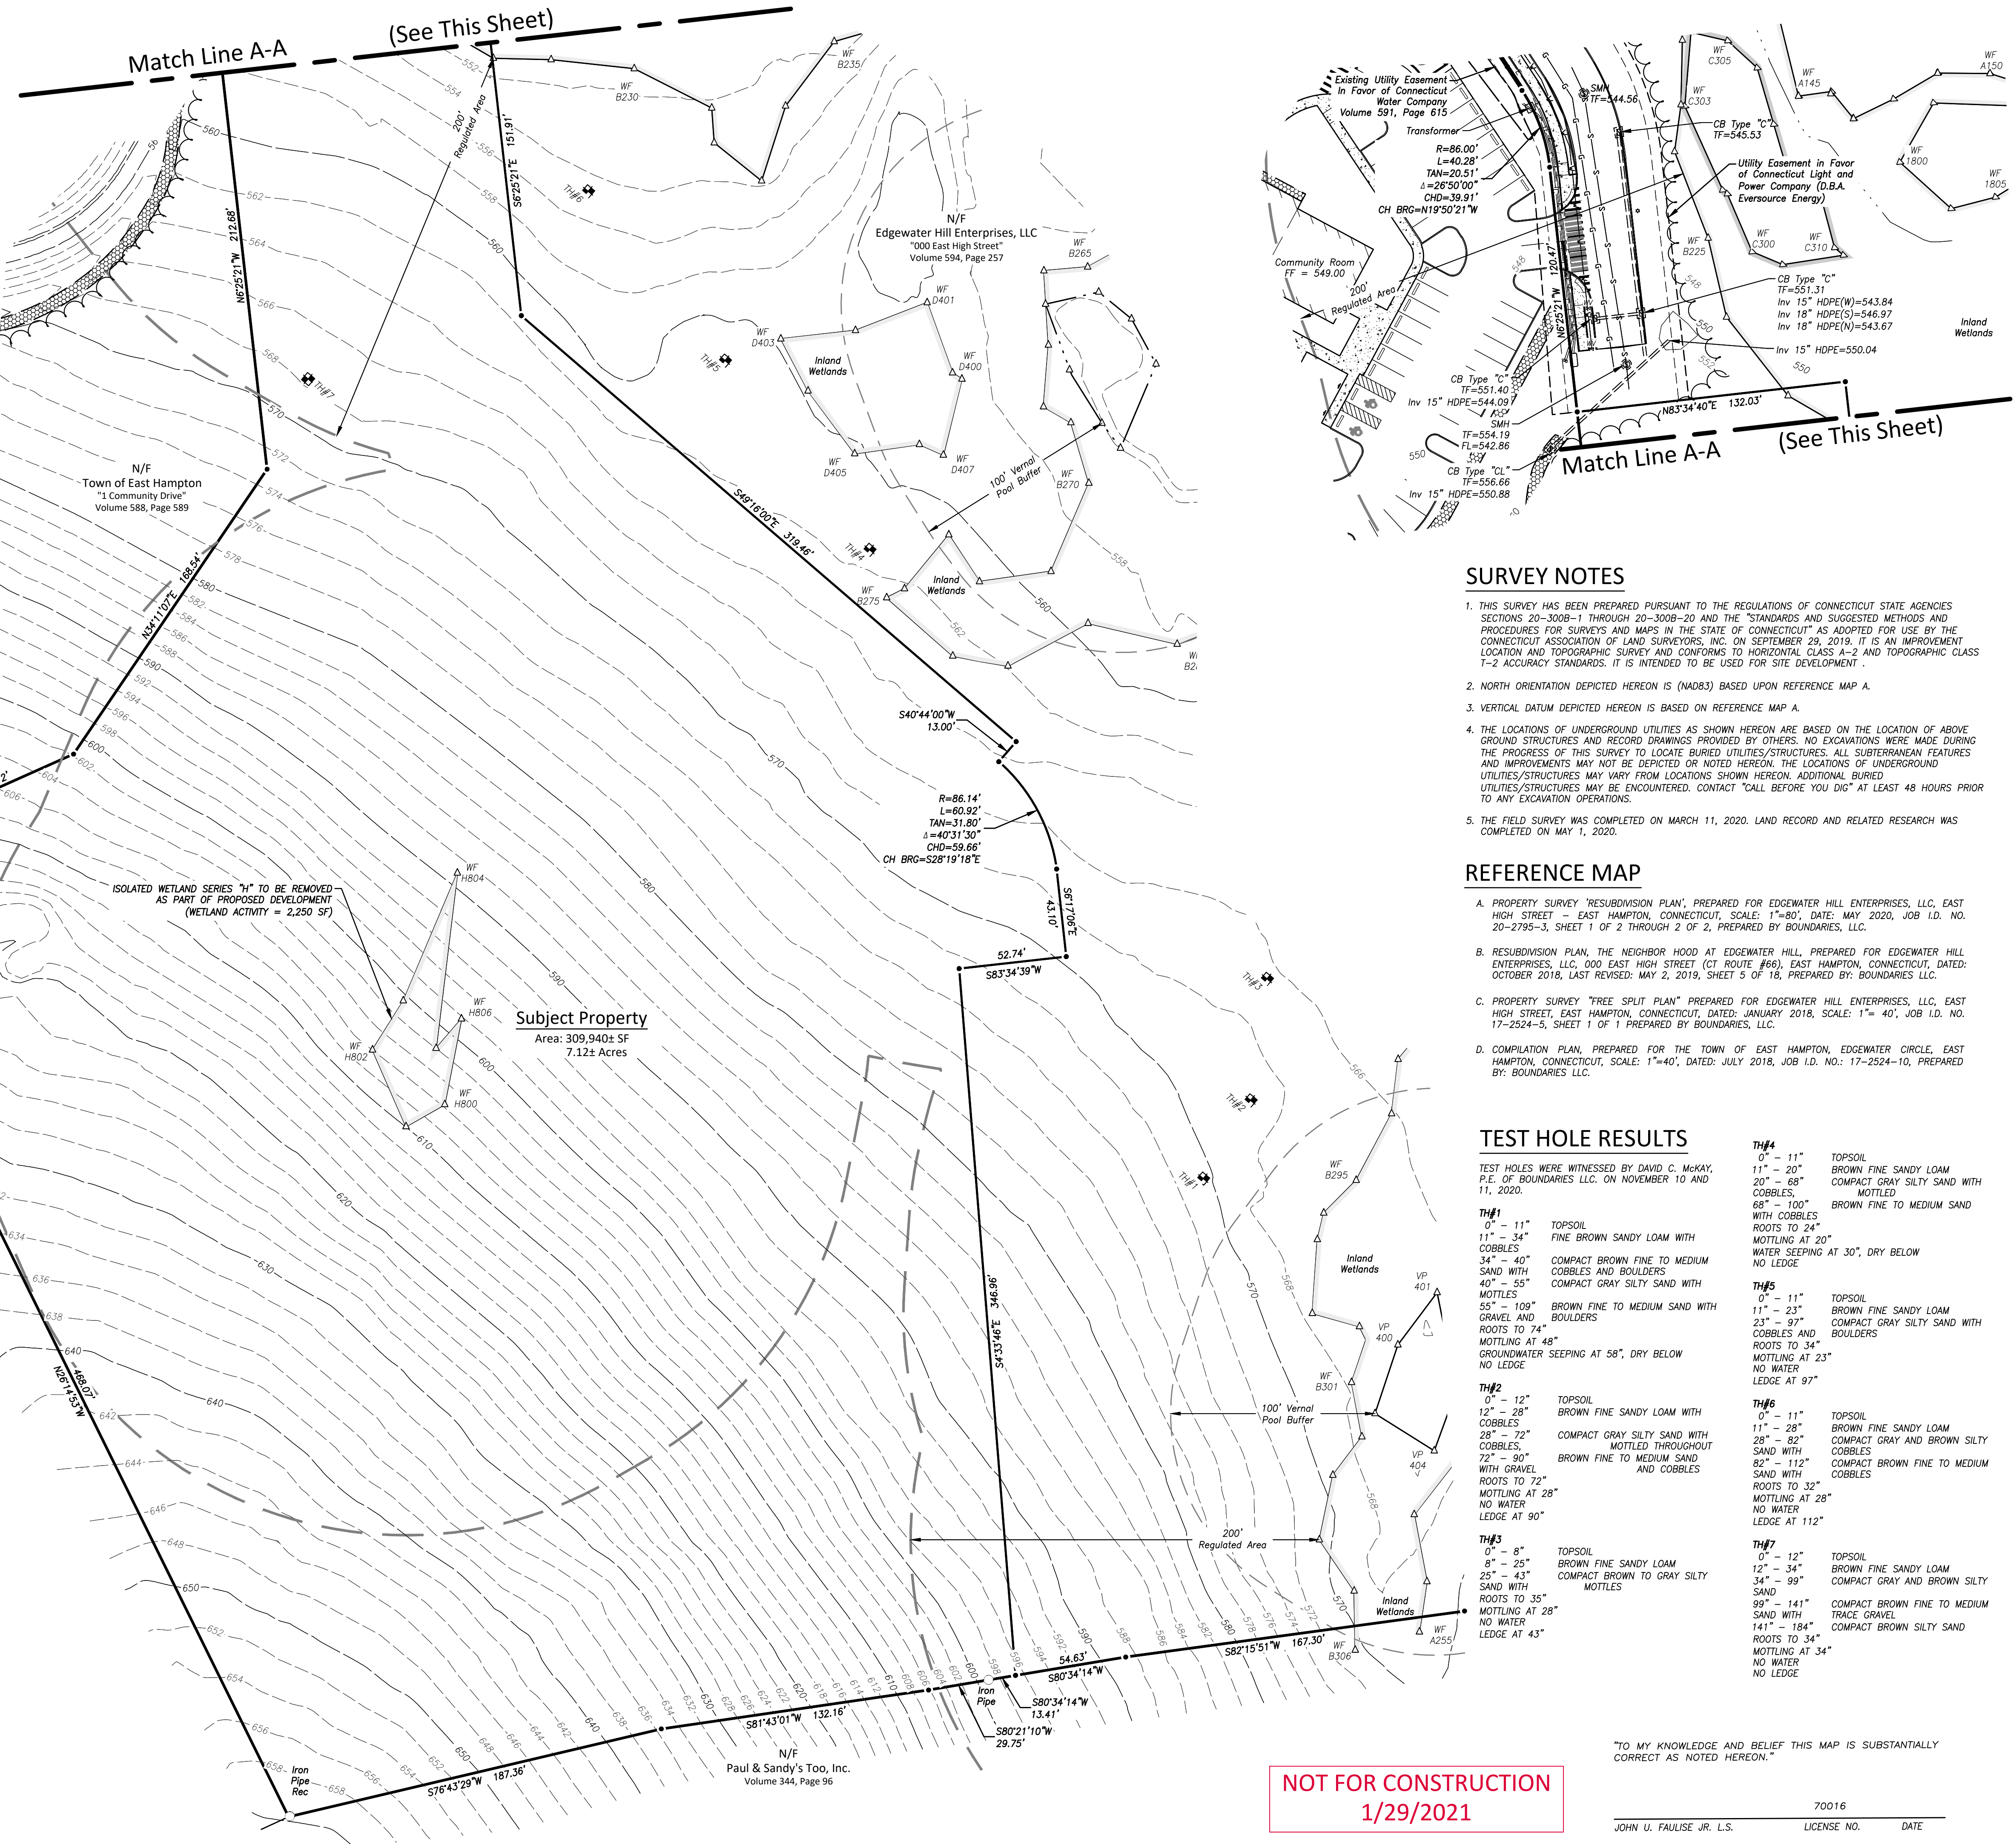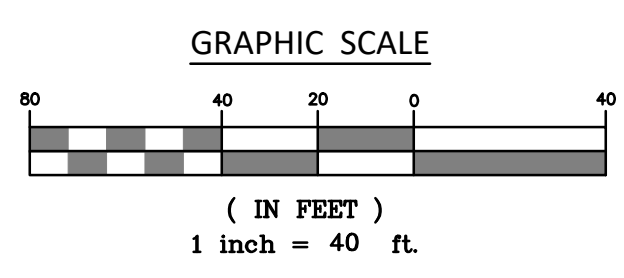

NOT FOR CONSTRUCTION
 1/29/2021

SURVEY NOTES

- THIS SURVEY HAS BEEN PREPARED PURSUANT TO THE REGULATIONS OF CONNECTICUT STATE AGENCIES SECTIONS 20-300B-1 THROUGH 20-300B-20 AND THE "STANDARDS AND SUGGESTED METHODS AND PROCEDURES FOR SURVEYS AND MAPS IN THE STATE OF CONNECTICUT" AS ADOPTED FOR USE BY THE CONNECTICUT ASSOCIATION OF LAND SURVEYORS, INC. ON SEPTEMBER 29, 2019. IT IS AN IMPROVEMENT LOCATION AND TOPOGRAPHIC SURVEY AND CONFORMS TO HORIZONTAL CLASS A-2 AND TOPOGRAPHIC CLASS T-2 ACCURACY STANDARDS. IT IS INTENDED TO BE USED FOR SITE DEVELOPMENT.
- NORTH ORIENTATION DEPICTED HEREON IS (NAD83) BASED UPON REFERENCE MAP A.
- VERTICAL DATUM DEPICTED HEREON IS BASED ON REFERENCE MAP A.
- THE LOCATIONS OF UNDERGROUND UTILITIES AS SHOWN HEREON ARE BASED ON THE LOCATION OF ABOVE GROUND STRUCTURES AND RECORD DRAWINGS PROVIDED BY OTHERS. NO EXCAVATIONS WERE MADE DURING THE PROGRESS OF THIS SURVEY TO LOCATE BURIED UTILITIES/STRUCTURES. ALL SUBTERRANEAN FEATURES AND IMPROVEMENTS MAY NOT BE DEPICTED OR NOTED HEREON. THE LOCATIONS OF UNDERGROUND UTILITIES/STRUCTURES MAY VARY FROM LOCATIONS SHOWN HEREON. ADDITIONAL BURIED UTILITIES/STRUCTURES MAY BE ENCOUNTERED. CONTACT "CALL BEFORE YOU DIG" AT LEAST 48 HOURS PRIOR TO ANY EXCAVATION OPERATIONS.
- THE FIELD SURVEY WAS COMPLETED ON MARCH 11, 2020. LAND RECORD AND RELATED RESEARCH WAS COMPLETED ON MAY 1, 2020.

REFERENCE MAP

- PROPERTY SURVEY "RESUBDIVISION PLAN", PREPARED FOR EDGEWATER HILL ENTERPRISES, LLC, EAST HIGH STREET - EAST HAMPTON, CONNECTICUT, SCALE: 1"=80', DATE: MAY 2020, JOB I.D. NO. 20-2795-3, SHEET 1 OF 2 THROUGH 2 OF 2, PREPARED BY BOUNDARIES, LLC.
- RESUBDIVISION PLAN, THE NEIGHBOR HOOD AT EDGEWATER HILL, PREPARED FOR EDGEWATER HILL ENTERPRISES, LLC, 000 EAST HIGH STREET (CT ROUTE #66), EAST HAMPTON, CONNECTICUT, DATED: OCTOBER 2018, LAST REVISED: MAY 2, 2019, SHEET 5 OF 18, PREPARED BY BOUNDARIES, LLC.
- PROPERTY SURVEY "TREE SPLIT PLAN" PREPARED FOR EDGEWATER HILL ENTERPRISES, LLC, EAST HIGH STREET, EAST HAMPTON, CONNECTICUT, DATED: JANUARY 2018, SCALE: 1"= 40', JOB I.D. NO. 17-2524-5, SHEET 1 OF 1 PREPARED BY BOUNDARIES, LLC.
- COMPILATION PLAN, PREPARED FOR THE TOWN OF EAST HAMPTON, EDGEWATER CIRCLE, EAST HAMPTON, CONNECTICUT, SCALE: 1"=40', DATED: JULY 2018, JOB I.D. NO.: 17-2524-10, PREPARED BY: BOUNDARIES, LLC.

TEST HOLE RESULTS


- TEST HOLES WERE WITNESSED BY DAVID C. MCKAY, P.E. OF BOUNDARIES, LLC. ON NOVEMBER 10 AND 11, 2020.
- TH#4**
 0" - 11" TOPSOIL
 11" - 20" BROWN FINE SANDY LOAM
 20" - 68" COMPACT GRAY SILTY SAND WITH COBBLES,
 68" - 100" BROWN FINE TO MEDIUM SAND WITH COBBLES
 0" - 11" TOPSOIL
 11" - 34" FINE BROWN SANDY LOAM WITH COBBLES
 34" - 40" COMPACT BROWN FINE TO MEDIUM SAND WITH COBBLES AND BOULDERS
 40" - 55" COMPACT GRAY SILTY SAND WITH MOTTLES
 55" - 109" BROWN FINE TO MEDIUM SAND WITH GRAVEL AND BOULDERS
 ROOTS TO 74"
 MOTTLING AT 48"
 GROUNDWATER SEEPING AT 58", DRY BELOW NO LEDGE
- TH#5**
 0" - 11" TOPSOIL
 11" - 23" BROWN FINE SANDY LOAM
 23" - 97" COMPACT GRAY SILTY SAND WITH COBBLES AND BOULDERS
 ROOTS TO 34"
 MOTTLING AT 23"
 NO WATER
 LEDGE AT 97"
- TH#6**
 0" - 11" TOPSOIL
 11" - 28" BROWN FINE SANDY LOAM
 28" - 82" COMPACT GRAY AND BROWN SILTY SAND WITH COBBLES
 82" - 112" COMPACT BROWN FINE TO MEDIUM SAND WITH SAND WITH AND COBBLES
 ROOTS TO 32"
 MOTTLING AT 28"
 NO WATER
 LEDGE AT 112"
- TH#7**
 0" - 12" TOPSOIL
 12" - 34" BROWN FINE SANDY LOAM
 34" - 99" COMPACT GRAY AND BROWN SILTY SAND
 99" - 141" COMPACT BROWN FINE TO MEDIUM SAND WITH TRACE GRAVEL
 141" - 184" COMPACT BROWN SILTY SAND
 ROOTS TO 34"
 MOTTLING AT 34"
 NO WATER
 NO LEDGE
- TH#1**
 0" - 11" TOPSOIL
 11" - 34" FINE BROWN SANDY LOAM WITH COBBLES
 34" - 40" COMPACT BROWN FINE TO MEDIUM SAND WITH COBBLES AND BOULDERS
 40" - 55" COMPACT GRAY SILTY SAND WITH MOTTLES
 55" - 109" BROWN FINE TO MEDIUM SAND WITH GRAVEL AND BOULDERS
 ROOTS TO 74"
 MOTTLING AT 48"
 GROUNDWATER SEEPING AT 58", DRY BELOW NO LEDGE
- TH#2**
 0" - 12" TOPSOIL
 12" - 28" BROWN FINE SANDY LOAM WITH COBBLES
 28" - 72" COMPACT GRAY SILTY SAND WITH COBBLES,
 72" - 90" BROWN FINE TO MEDIUM SAND WITH GRAVEL AND COBBLES
 ROOTS TO 72"
 MOTTLING AT 28"
 NO WATER
 LEDGE AT 90"
- TH#3**
 0" - 8" TOPSOIL
 8" - 25" BROWN FINE SANDY LOAM
 25" - 43" COMPACT BROWN TO GRAY SILTY SAND WITH MOTTLES
 ROOTS TO 35"
 MOTTLING AT 28"
 NO WATER
 LEDGE AT 43"

"TO MY KNOWLEDGE AND BELIEF THIS MAP IS SUBSTANTIALLY CORRECT AS NOTED HEREON."


JOHN U. FAULISE JR. L.S. LICENSE NO. 70016 DATE

P:\CIVIL 3D PROJECTS\2020\20-2853 EDGEWATER-APARTMENTS\DWG\DESIGN\2 EX CONDITIONS.DWG

Salt Pond Apartments at Edgewater Hill
 "Lot Line Modification Plan"
 Prepared for
 Edgewater Hill Enterprises, LLC
 000 East High Street - East Hampton, Connecticut



SCALE:	1" = 50'
DATE:	December 2020
JOB I.D. NO.:	20-2853
Revisions	
Rev. A -	IWWC Comments & Stormwater Quality - 1/18/21
Rev. B -	Per IWWC Conditions of Approval - 1/29/21

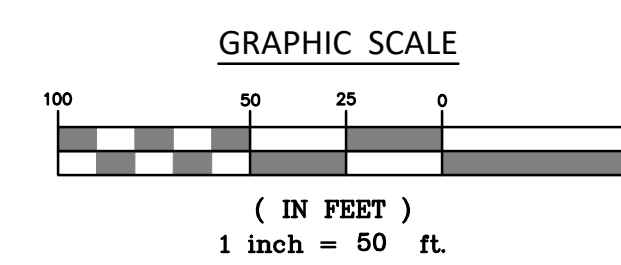

"TO MY KNOWLEDGE AND BELIEF THIS MAP IS SUBSTANTIALLY CORRECT AS NOTED HEREON."

JOHN U. FAULISE JR. L.S. 70016 DATE
 LICENSE NO. LICENSURE NO.

SHEET NO.

3 / 25

NOT FOR CONSTRUCTION
 1/29/2021

PLAN NOTES

1. SEE SHEET 2 FOR LEGEND & ABBREVIATIONS.

Subject Property
 Existing Area: 309,940± SF
 7.12± Acres
 Proposed Area: 396,223± SF
 9.10± Acres

N/F
 Edgewater Hill Enterprises, LLC
 "000 East High Street"
 Volume 594, Page 257
 Existing Area: 1,839,610± SF
 42.23± Acres
 Remaining Area: 1,753,322± SF
 40.25± Acres

N/F
 Town of East Hampton
 "1 Community Drive"
 Volume 588, Page 589

N/F
 Lake Vista-Bakerhill
 Condominium Association
 Volume 216, Page 1


N/F
 Paul & Sandy's Too, Inc.
 Volume 344, Page 96

R=86.00'
 L=40.28'
 TAN=20.51°
 Δ=26°50'00"
 CHD=39.91'
 CH BRG=N19°50'21"W

R=86.14'
 L=60.92'
 TAN=31.80°
 Δ=40°31'30"
 CHD=59.66'
 CH BRG=S28°19'18"E

N36°56'31"E
 27.65'
 28" Tree Stump
 N32°32'36"W
 37.04'

P:\CIVIL 3D PROJECTS\2020\20-2853 EDgewater-APARTMENTS\DWG\DESIGN\2 EX-CONDITIONS.DWG




SCALE: 1" = 30'
 DATE: December 2020
 JOB I.D. NO.: 20-2853
Revisions
 Rev. A - IWWC Comments & Stormwater Quality - 1/18/21
 Rev. B - Per IWWC Conditions of Approval - 1/29/21

SHEET NO.

4


25

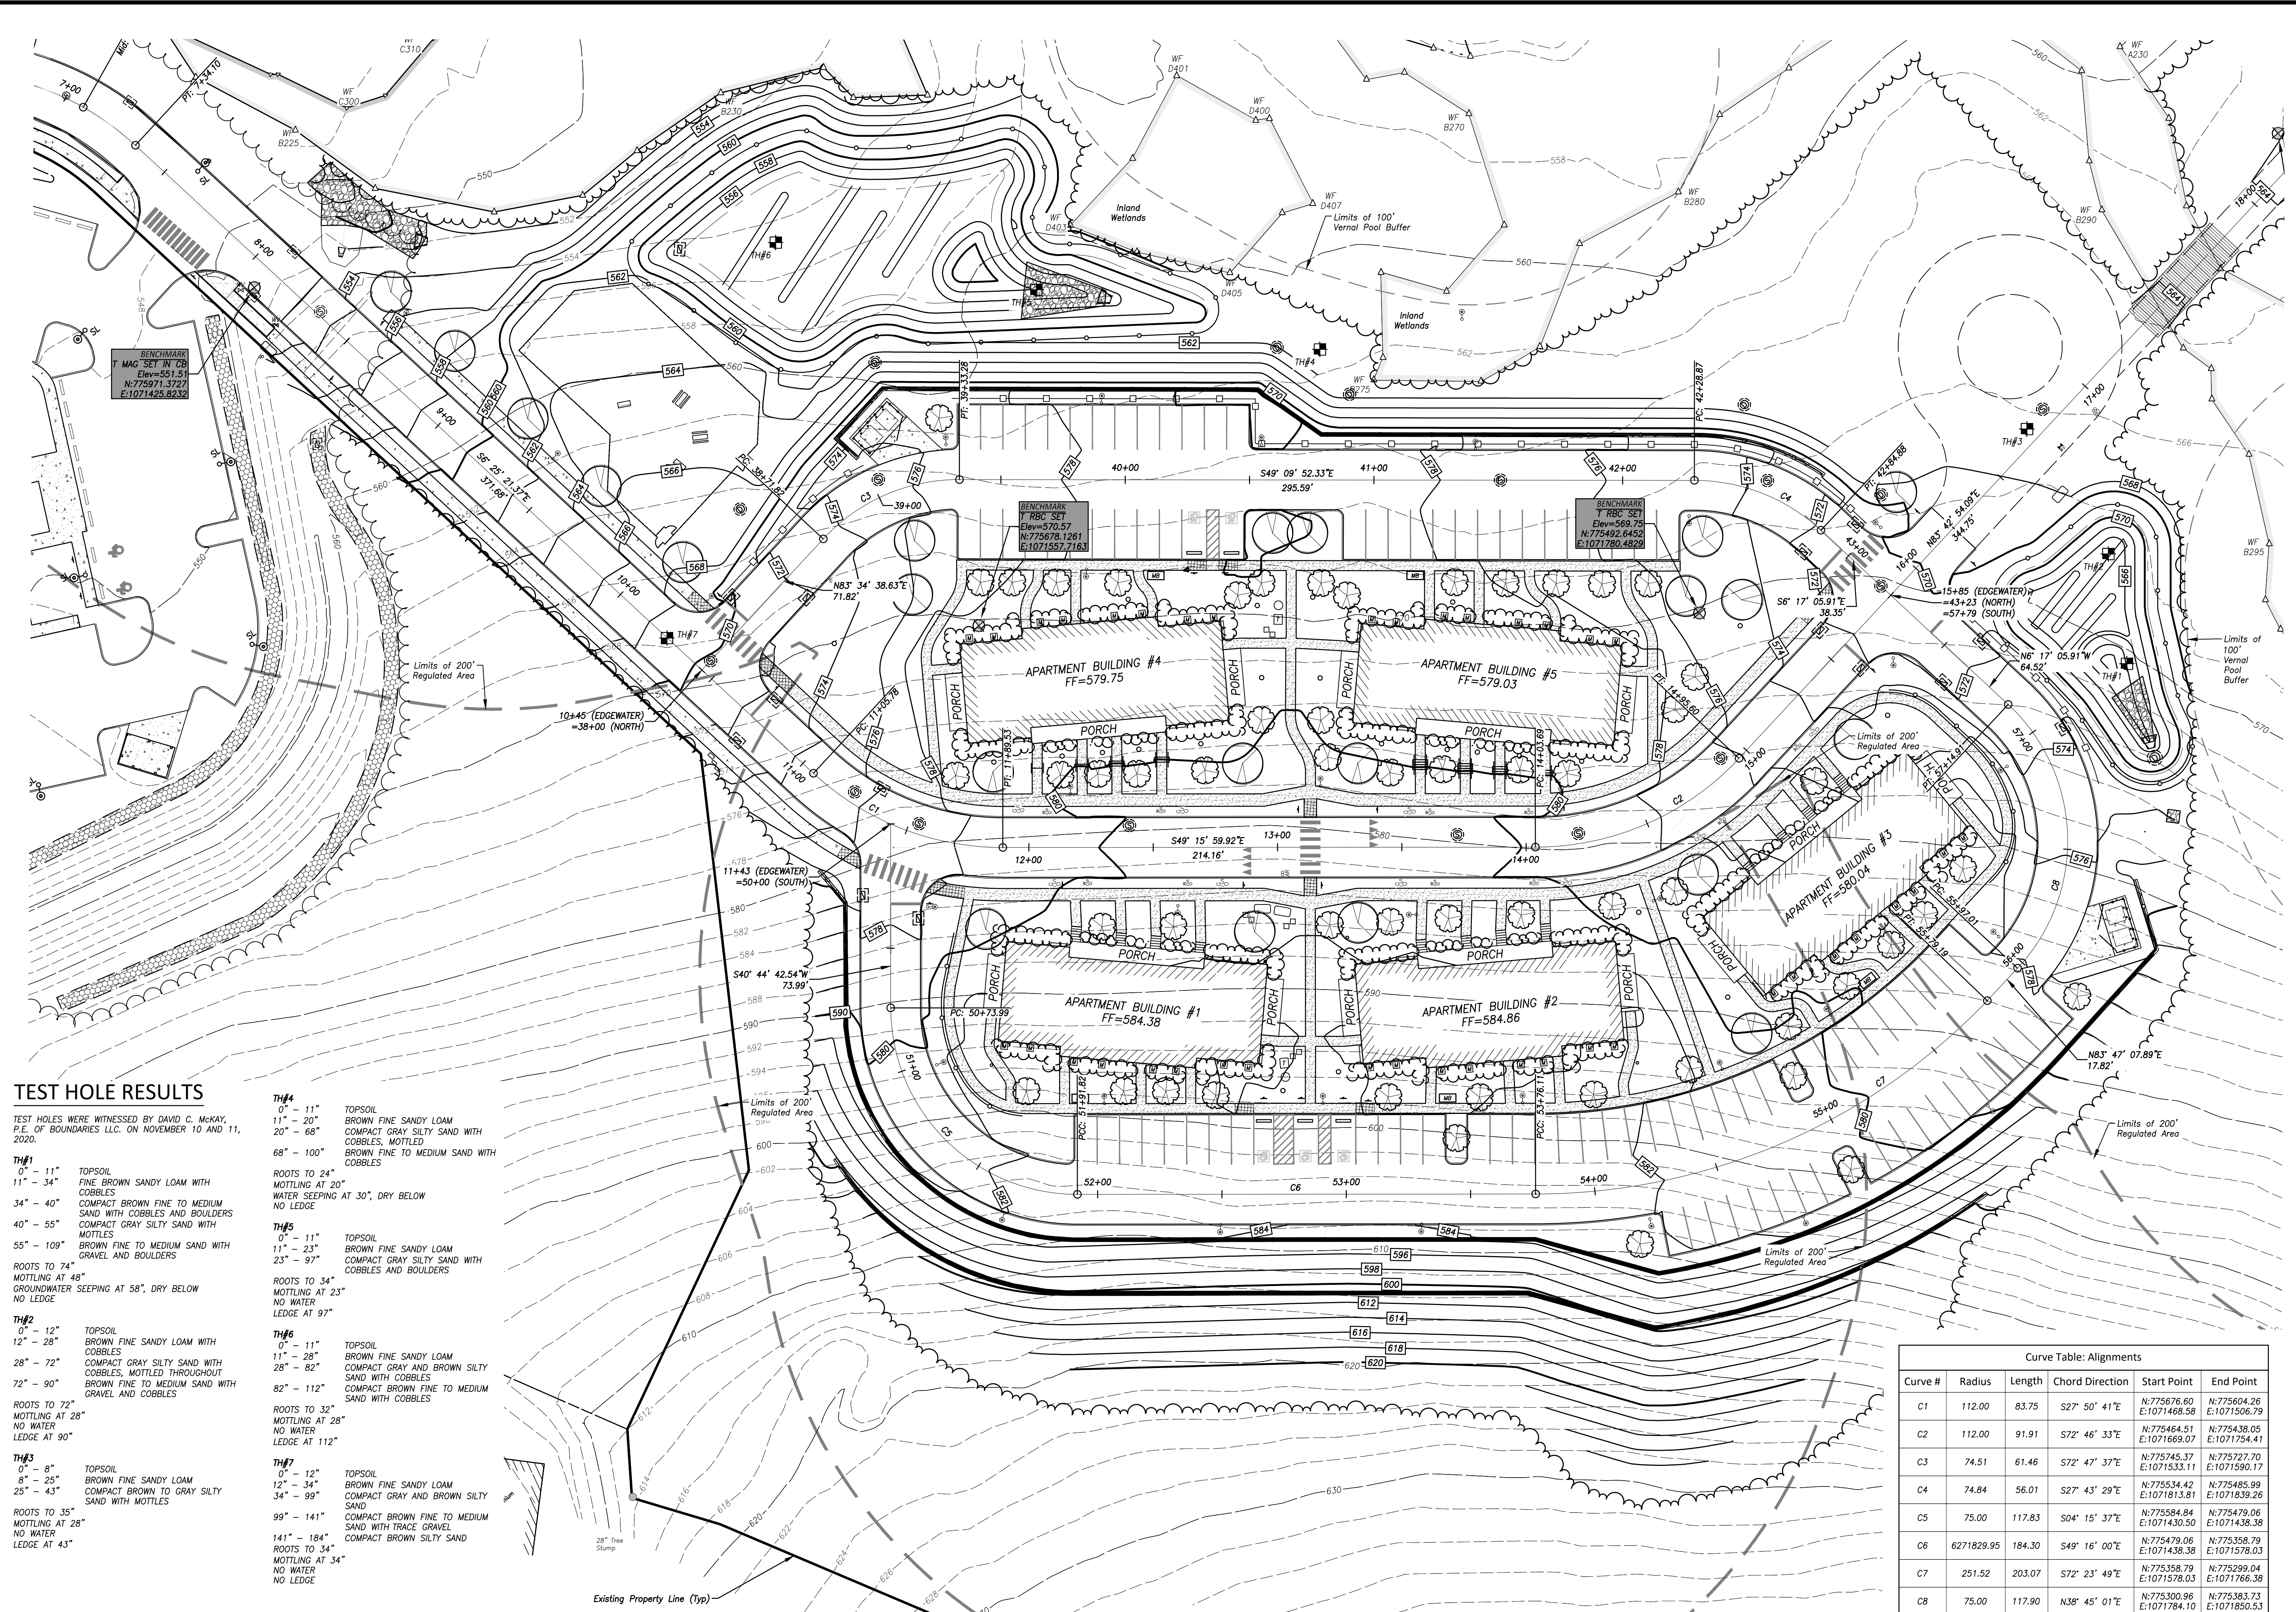

TEST HOLE RESULTS

TEST HOLES WERE WITNESSED BY DAVID C. MCKAY, P.E. OF BOUNDARIES LLC, ON NOVEMBER 10 AND 11, 2020.

- TH#1**
 0" - 11" TOPSOIL
 11" - 34" FINE BROWN SANDY LOAM WITH COBBLES
 34" - 40" COMPACT BROWN FINE TO MEDIUM SAND WITH COBBLES AND BOULDERS
 40" - 55" COMPACT GRAY SILTY SAND WITH MOTTLES
 55" - 109" BROWN FINE TO MEDIUM SAND WITH GRAVEL AND BOULDERS
 ROOTS TO 74"
 MOTTLING AT 49"
 GROUNDWATER SEEPING AT 58", DRY BELOW NO LEDGE
- TH#2**
 0" - 12" TOPSOIL
 12" - 28" BROWN FINE SANDY LOAM WITH COBBLES
 28" - 72" COMPACT GRAY AND BROWN SILTY SAND WITH COBBLES, MOTTLED THROUGHOUT
 72" - 90" BROWN FINE TO MEDIUM SAND WITH GRAVEL AND COBBLES
 ROOTS TO 72"
 MOTTLING AT 28"
 NO WATER
 LEDGE AT 90"
- TH#3**
 0" - 8" TOPSOIL
 8" - 25" BROWN FINE SANDY LOAM
 25" - 43" COMPACT BROWN TO GRAY SILTY SAND WITH MOTTLES
 ROOTS TO 35"
 MOTTLING AT 28"
 NO WATER
 LEDGE AT 43"
- TH#4**
 0" - 11" TOPSOIL
 11" - 20" BROWN FINE SANDY LOAM
 20" - 68" COMPACT GRAY SILTY SAND WITH COBBLES, MOTTLED
 68" - 100" BROWN FINE TO MEDIUM SAND WITH COBBLES
 ROOTS TO 24"
 MOTTLING AT 20"
 WATER SEEPING AT 30", DRY BELOW NO LEDGE
- TH#5**
 0" - 11" TOPSOIL
 11" - 23" BROWN FINE SANDY LOAM
 23" - 97" COMPACT GRAY SILTY SAND WITH COBBLES AND BOULDERS
 ROOTS TO 34"
 MOTTLING AT 23"
 NO WATER
 LEDGE AT 97"
- TH#6**
 0" - 11" TOPSOIL
 11" - 28" BROWN FINE SANDY LOAM
 28" - 82" COMPACT GRAY AND BROWN SILTY SAND WITH COBBLES
 82" - 112" COMPACT BROWN FINE TO MEDIUM SAND WITH COBBLES
 ROOTS TO 32"
 MOTTLING AT 28"
 NO WATER
 LEDGE AT 112"
- TH#7**
 0" - 12" TOPSOIL
 12" - 34" BROWN FINE SANDY LOAM
 34" - 99" COMPACT GRAY AND BROWN SILTY SAND
 99" - 141" COMPACT BROWN FINE TO MEDIUM SAND WITH TRACE GRAVEL
 141" - 184" COMPACT BROWN SILTY SAND
 ROOTS TO 34"
 MOTTLING AT 34"
 NO WATER
 NO LEDGE

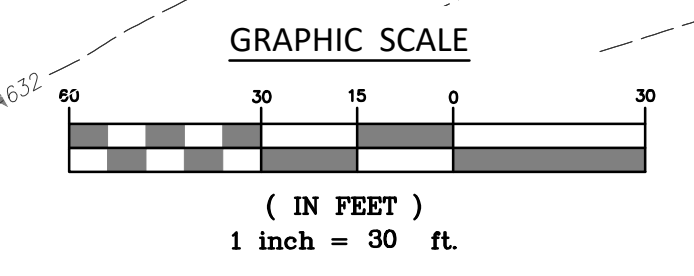

Curve Table: Alignments					
Curve #	Radius	Length	Chord Direction	Start Point	End Point
C1	112.00	83.75	S27° 50' 41"E	N:775676.60 E:1071468.58	N:775604.26 E:1071506.79
C2	112.00	91.91	S72° 46' 33"E	N:775464.51 E:1071669.07	N:775438.05 E:1071754.41
C3	74.51	61.46	S72° 47' 37"E	N:775745.37 E:1071533.11	N:775727.70 E:1071590.17
C4	74.84	56.01	S27° 43' 29"E	N:775534.42 E:1071813.81	N:775485.99 E:1071839.26
C5	75.00	117.83	S04° 15' 37"E	N:775584.84 E:1071430.50	N:775479.06 E:1071438.38
C6	6271829.95	184.30	S49° 16' 00"E	N:775479.06 E:1071438.38	N:775358.79 E:1071578.03
C7	251.52	203.07	S72° 23' 49"E	N:775358.79 E:1071578.03	N:775299.04 E:1071766.38
C8	75.00	117.90	N38° 45' 01"E	N:775300.96 E:1071784.10	N:775383.73 E:1071850.53

NOT FOR CONSTRUCTION
 1/29/2021

PLAN NOTES
 1. SEE COVER SHEET FOR ENGINEER AND SURVEYOR SIGNATURES AND SEALS.
 2. SEE SHEET 2 FOR LEGEND & ABBREVIATIONS.

P:\CIVIL 3D PROJECTS\2020\20-2853\EDGEWATER-APARTMENTS\DWG\DESIGN\3 APARTMENT SITE PLAN.DWG

© 2020 BOUNDARIES LLC
 THIS DRAWING IS THE PROPERTY OF BOUNDARIES LLC AND HAS BEEN SPECIFICALLY PREPARED FOR THE OWNER OF THIS PROJECT. AT THIS SITE, AND IS NOT TO BE REPRODUCED OR USED IN PART OR WHOLE FOR ANY OTHER PURPOSE, PROJECT, LOCATION OR OWNER WITHOUT THE EXPRESSED WRITTEN CONSENT OF BOUNDARIES LLC.

ZONING COMPLIANCE

THE SITE PLAN IS SUBSTANTIALLY COMPLIANT WITH THE EDGEWATER HILL MASTER PLAN.

PARKING CALCULATION

REQUIRED PARKING SPACES ARE PROVIDED IN ACCORDANCE WITH SECTION 7.1.B OF THE TOWN OF EAST HAMPTON ZONING REGULATIONS.

MULTI-FAMILY RESIDENTIAL: 1 - 2 PER DWELLING UNIT

PROPOSED MULTI FAMILY RESIDENTIAL UNITS = 40


MINIMUM REQUIRED PARKING: 40 UNITS x 1 SPACE/UNIT = 40 SPACES

MAXIMUM REQUIRED PARKING: 40 UNITS x 2 SPACES/UNIT = 80 SPACES

PARKING SPACES PROVIDED: 97 SPACES (92 STANDARD SPACES, 1 ADA VAN ACCESSIBLE SPACE, 4 ADA ACCESSIBLE SPACES)

WALKER FROM SECTION 7.1.B REQUIRED


ID NUMBER	DESCRIPTION	CT DOT CATALOG NUMBER	SIGN DIMENSIONS
S1	STOP	31-0552	30" X 30"
S2	SPEED LIMIT "20 MPH"	31-5505	24" X 30"
S3	PEDESTRIAN SYMBOL WITH AHEAD SIGN	41-4810/41-6127	30" X 30"/24" X 12"
S4	YIELD HERE TO PEDESTRIANS	31-0510/31-0511	18" X 18"
S5	PEDESTRIAN SYMBOL WITH DIAGONAL ARROW	41-4810/41-2607 OR 41-2608	30" X 30"/24" X 12"
S6	TRAFFIC FROM RIGHT DOES NOT STOP	41-0543	30" X 18"
S7	TRAFFIC FROM LEFT DOES NOT STOP	41-0544	30" X 18"
S8	ONCOMING TRAFFIC DOES NOT STOP	41-0565	30" X 18"

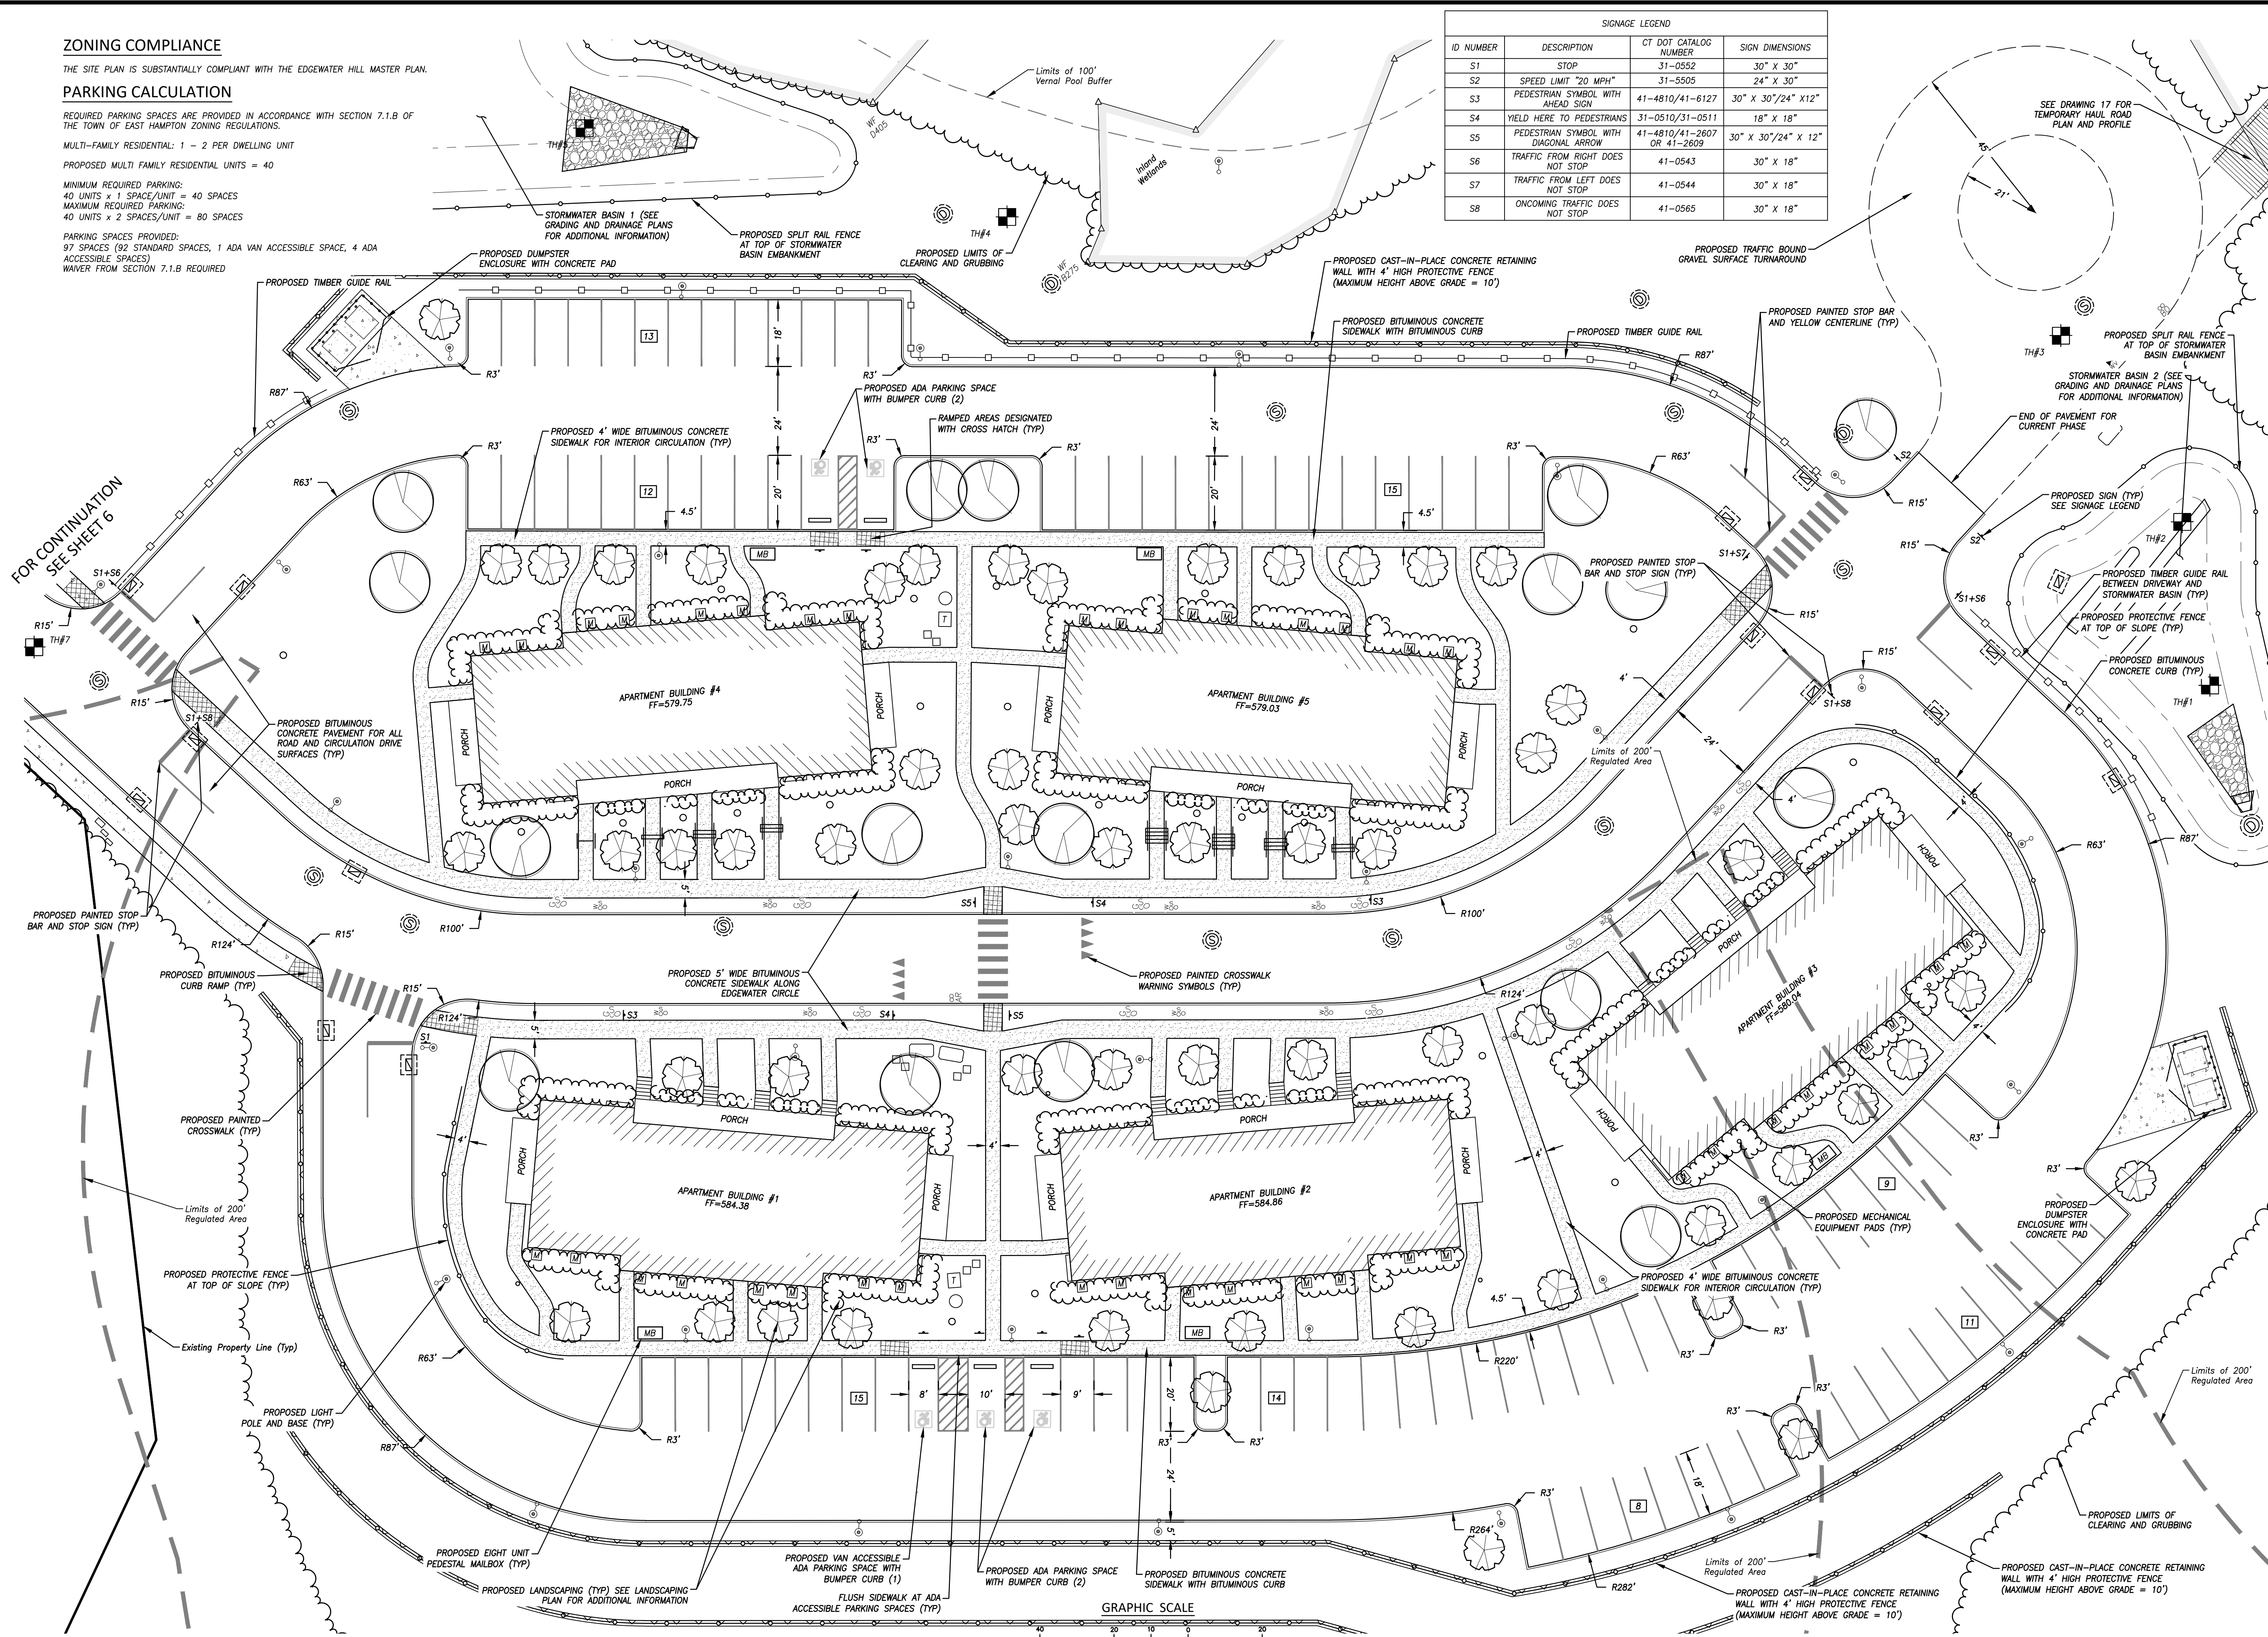

NOT FOR CONSTRUCTION
1/29/2021

PLAN NOTES



- SEE COVER SHEET FOR ENGINEER AND SURVEYOR SIGNATURES AND SEALS.
- SEE SHEET 2 FOR LEGEND & ABBREVIATIONS.



SCALE:	1" = 20'
DATE:	December 2020
JOB I.D. NO.:	20-2853
Revisions	
Rev. A -	IWWC Comments & Stormwater Quality - 1/18/21
Rev. B -	Per IWWC Conditions of Approval - 1/29/21

P:\CIVIL 3D PROJECTS\2020\20-2853 EDGEWATER-APARTMENTS\DWG\DESIGN\3 APARTMENT SITE PLAN.DWG

© 2020 BOUNDARIES LLC
THIS DRAWING IS THE PROPERTY OF BOUNDARIES LLC AND HAS BEEN SPECIFICALLY PREPARED FOR THE OWNER OF THIS PROJECT. AT THIS SITE, AND IS NOT TO BE REPRODUCED OR USED IN PART OR WHOLE FOR ANY OTHER PURPOSE. PROJECT, LOCATION OR OWNER WITHOUT THE EXPRESSED WRITTEN CONSENT OF BOUNDARIES LLC.

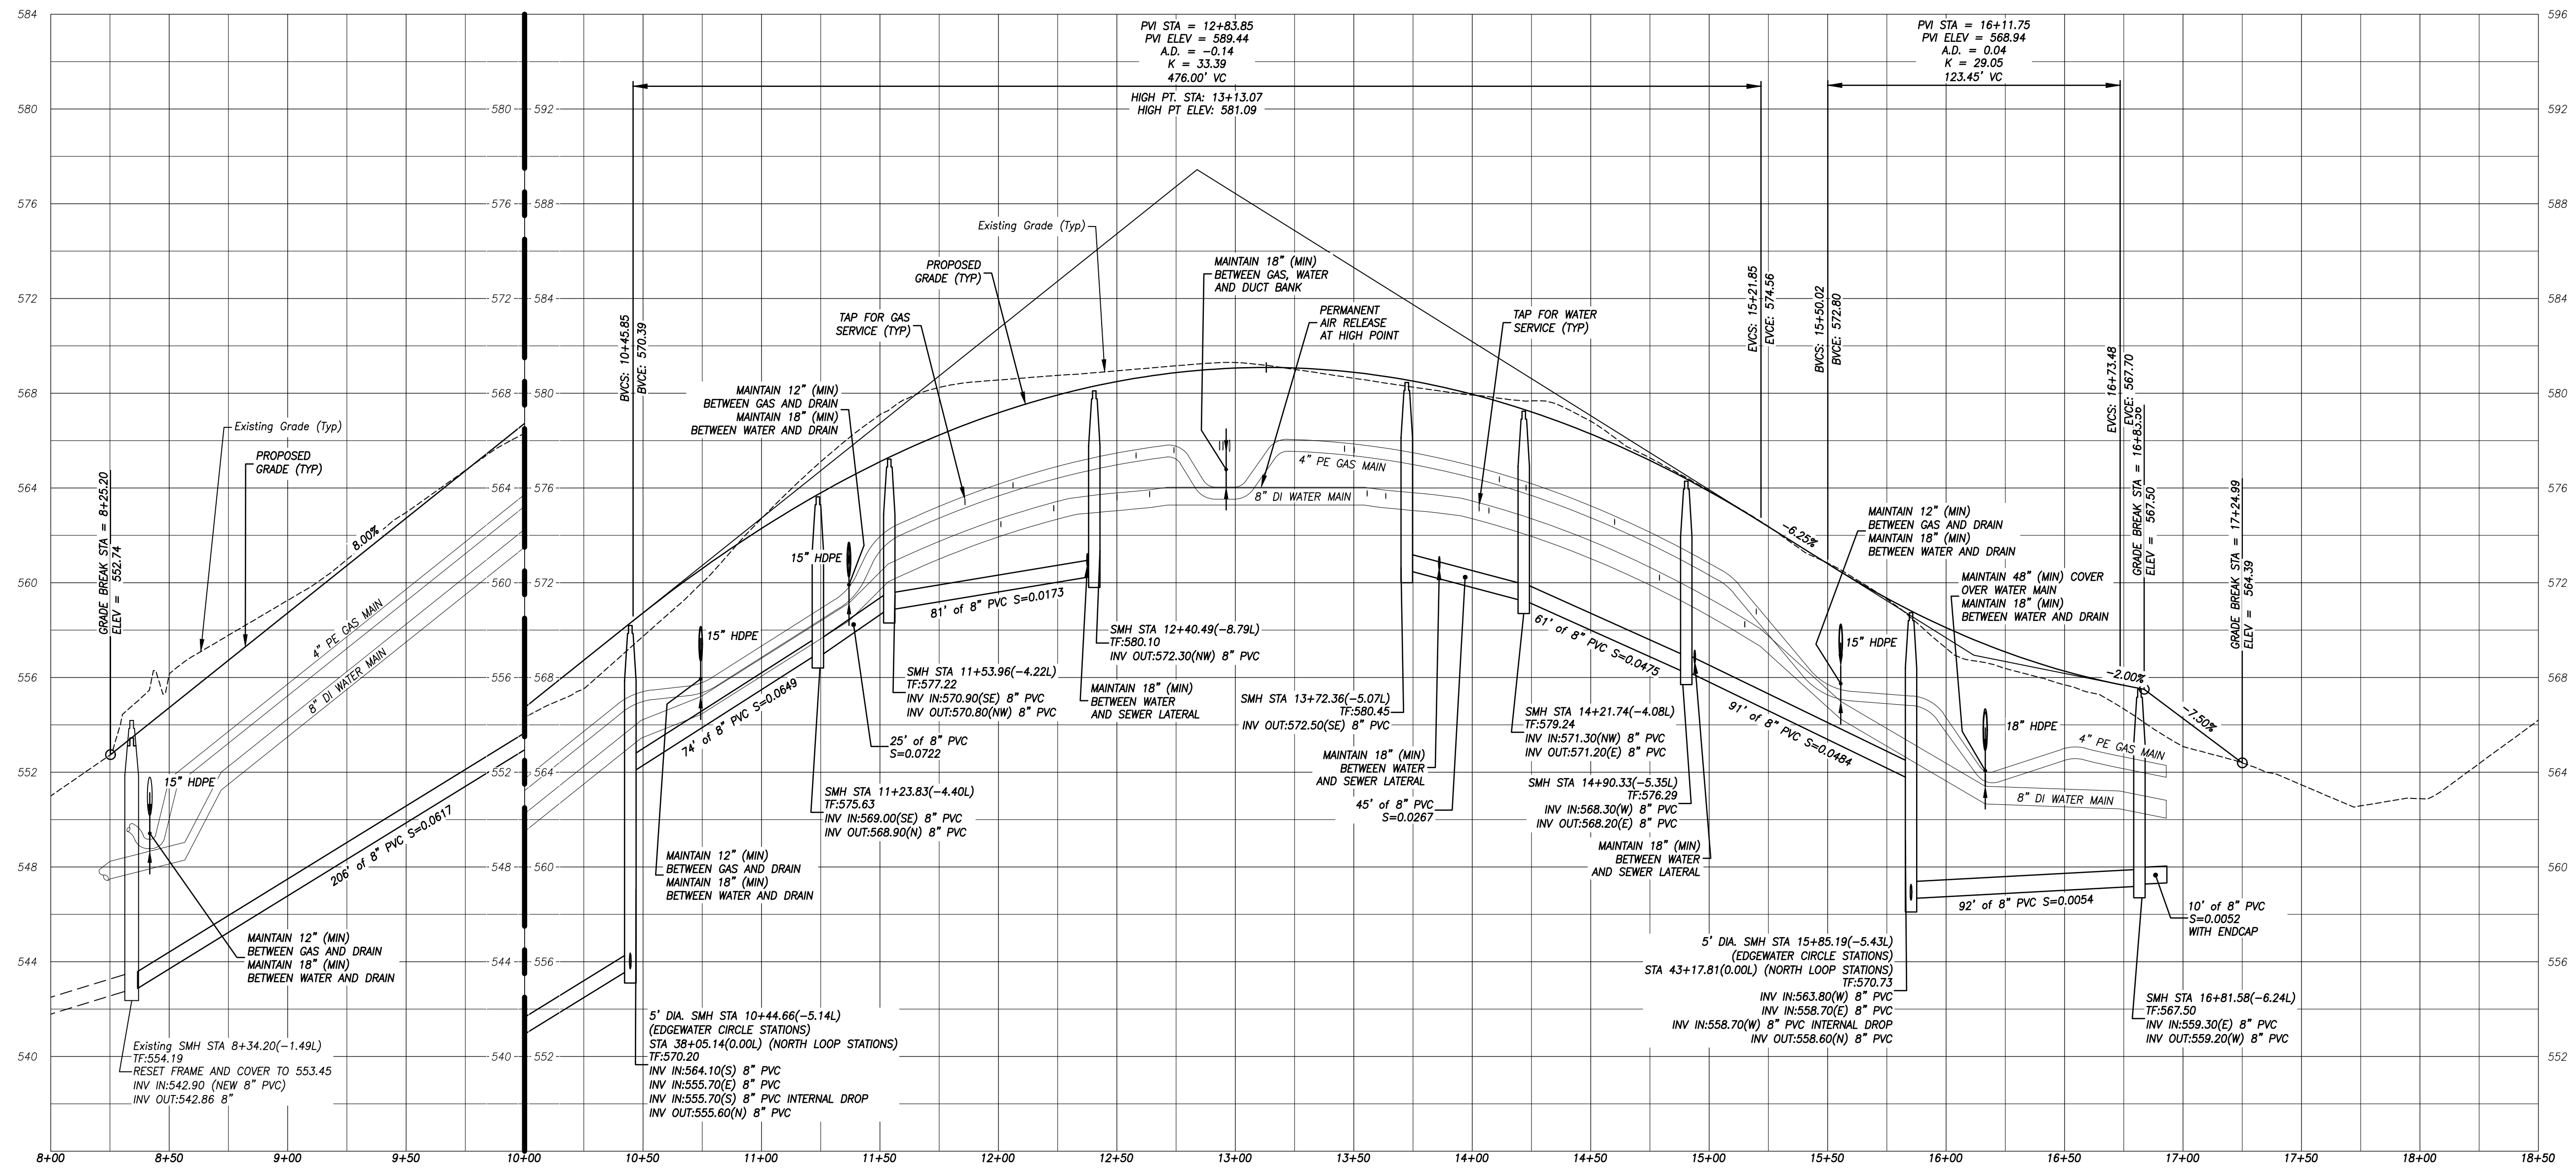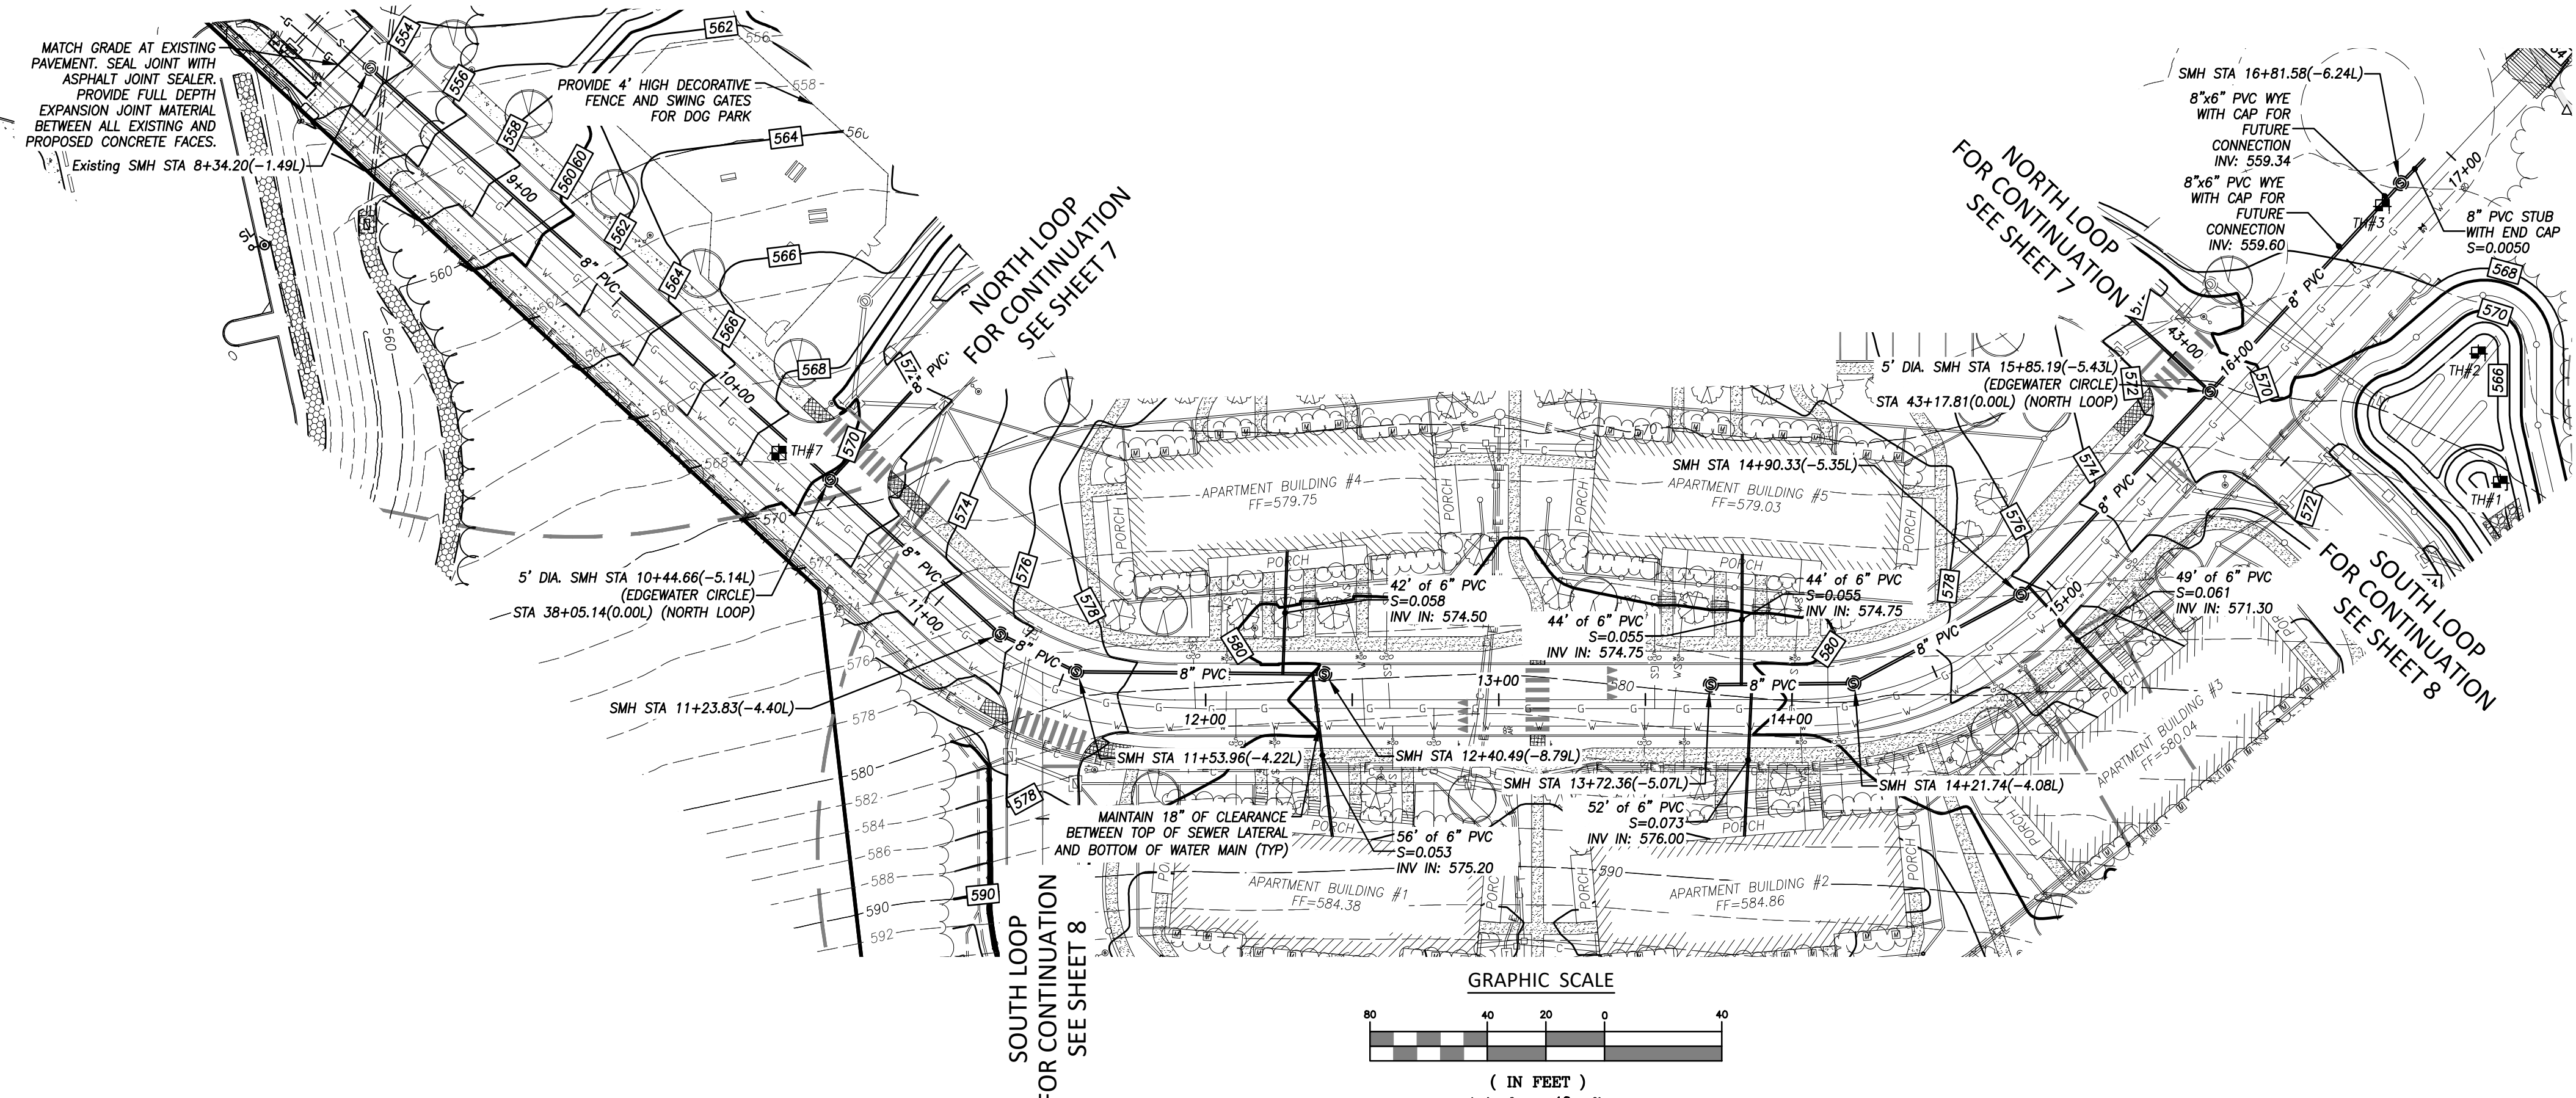


CENTERLINE PROFILE - EDGEWATER CIRCLE
 HORIZONTAL SCALE: 1"=40'
 VERTICAL SCALE: 1"=4'

NOT FOR CONSTRUCTION
 1/29/2021

PLAN NOTES

- SEE COVER SHEET FOR ENGINEER AND SURVEYOR SIGNATURES AND SEALS.
- SEE SHEET 2 FOR LEGEND & ABBREVIATIONS.



SCALE: 1" = 40'
 DATE: December 2020
 JOB I.D. NO.: 20-2853



Revisions

Rev. A - IWWC Comments & Stormwater Quality - 1/18/21
Rev. B - Per IWWC Conditions of Approval - 1/29/21

SHEET NO.

6 / 25

P:\CIVIL 3D PROJECTS\2020\20-2853 EDGEWATER-APARTMENTS\DWG\DESIGN\3 APARTMENT SITE PLAN.DWG

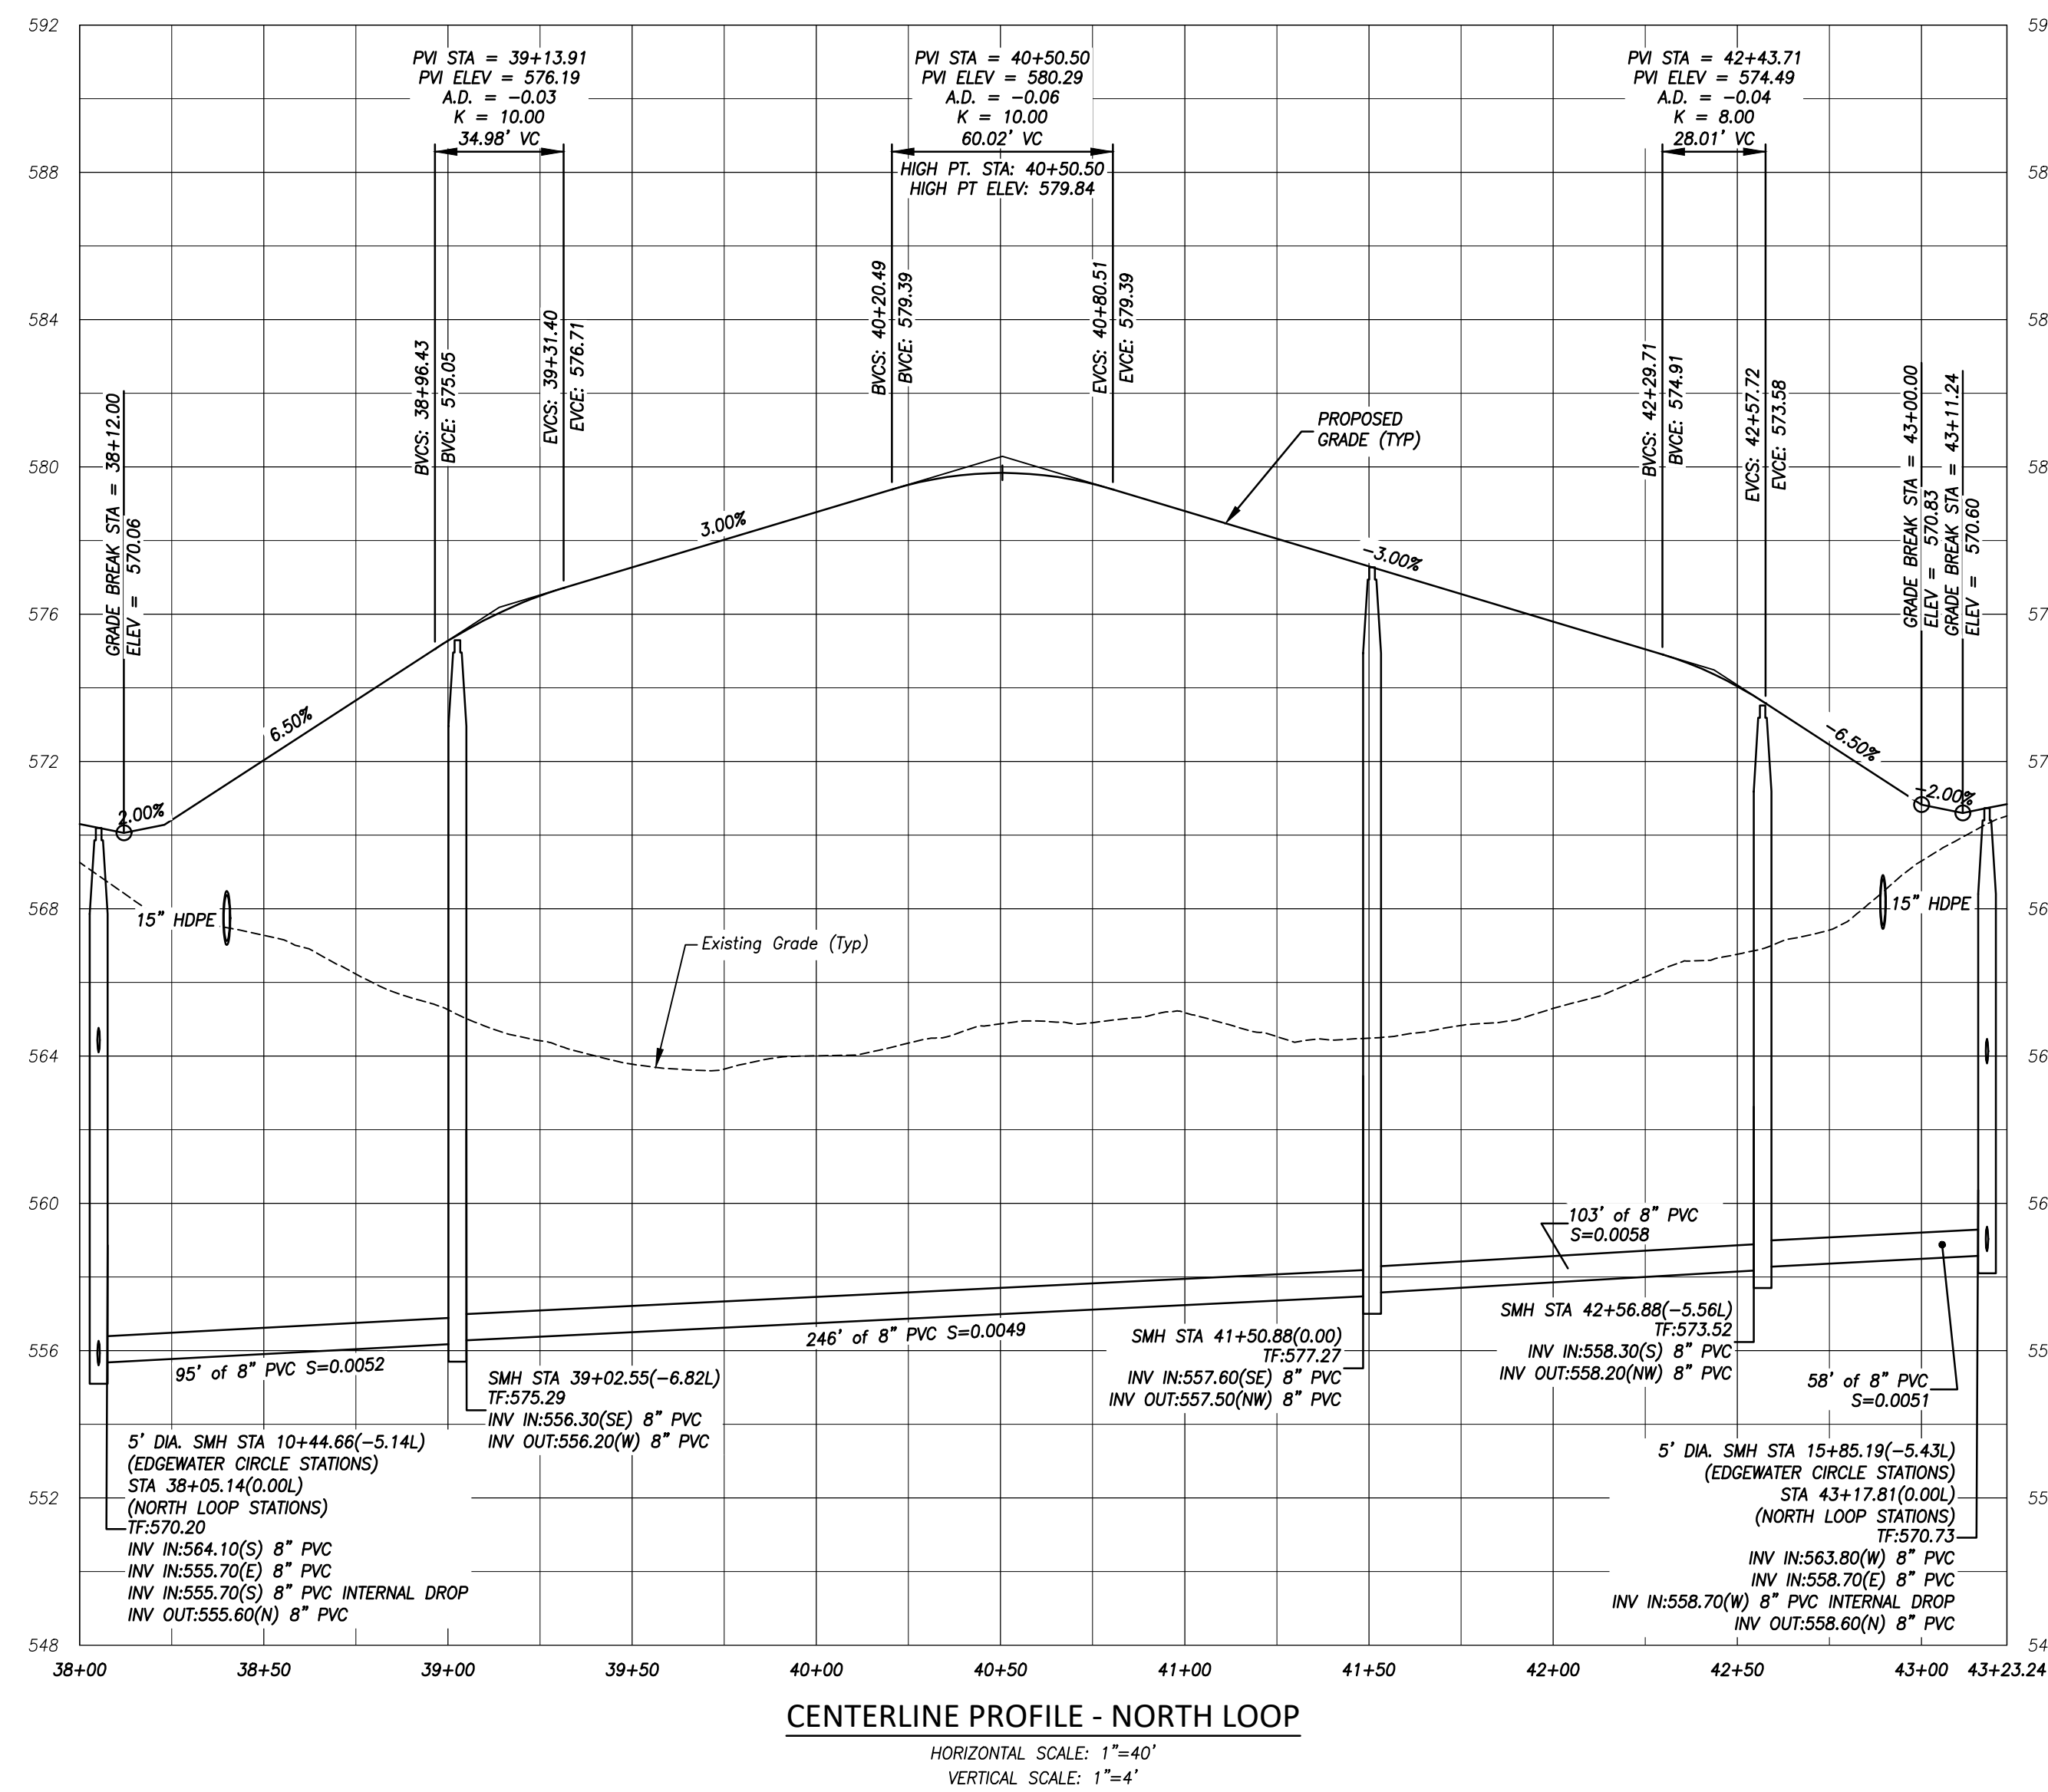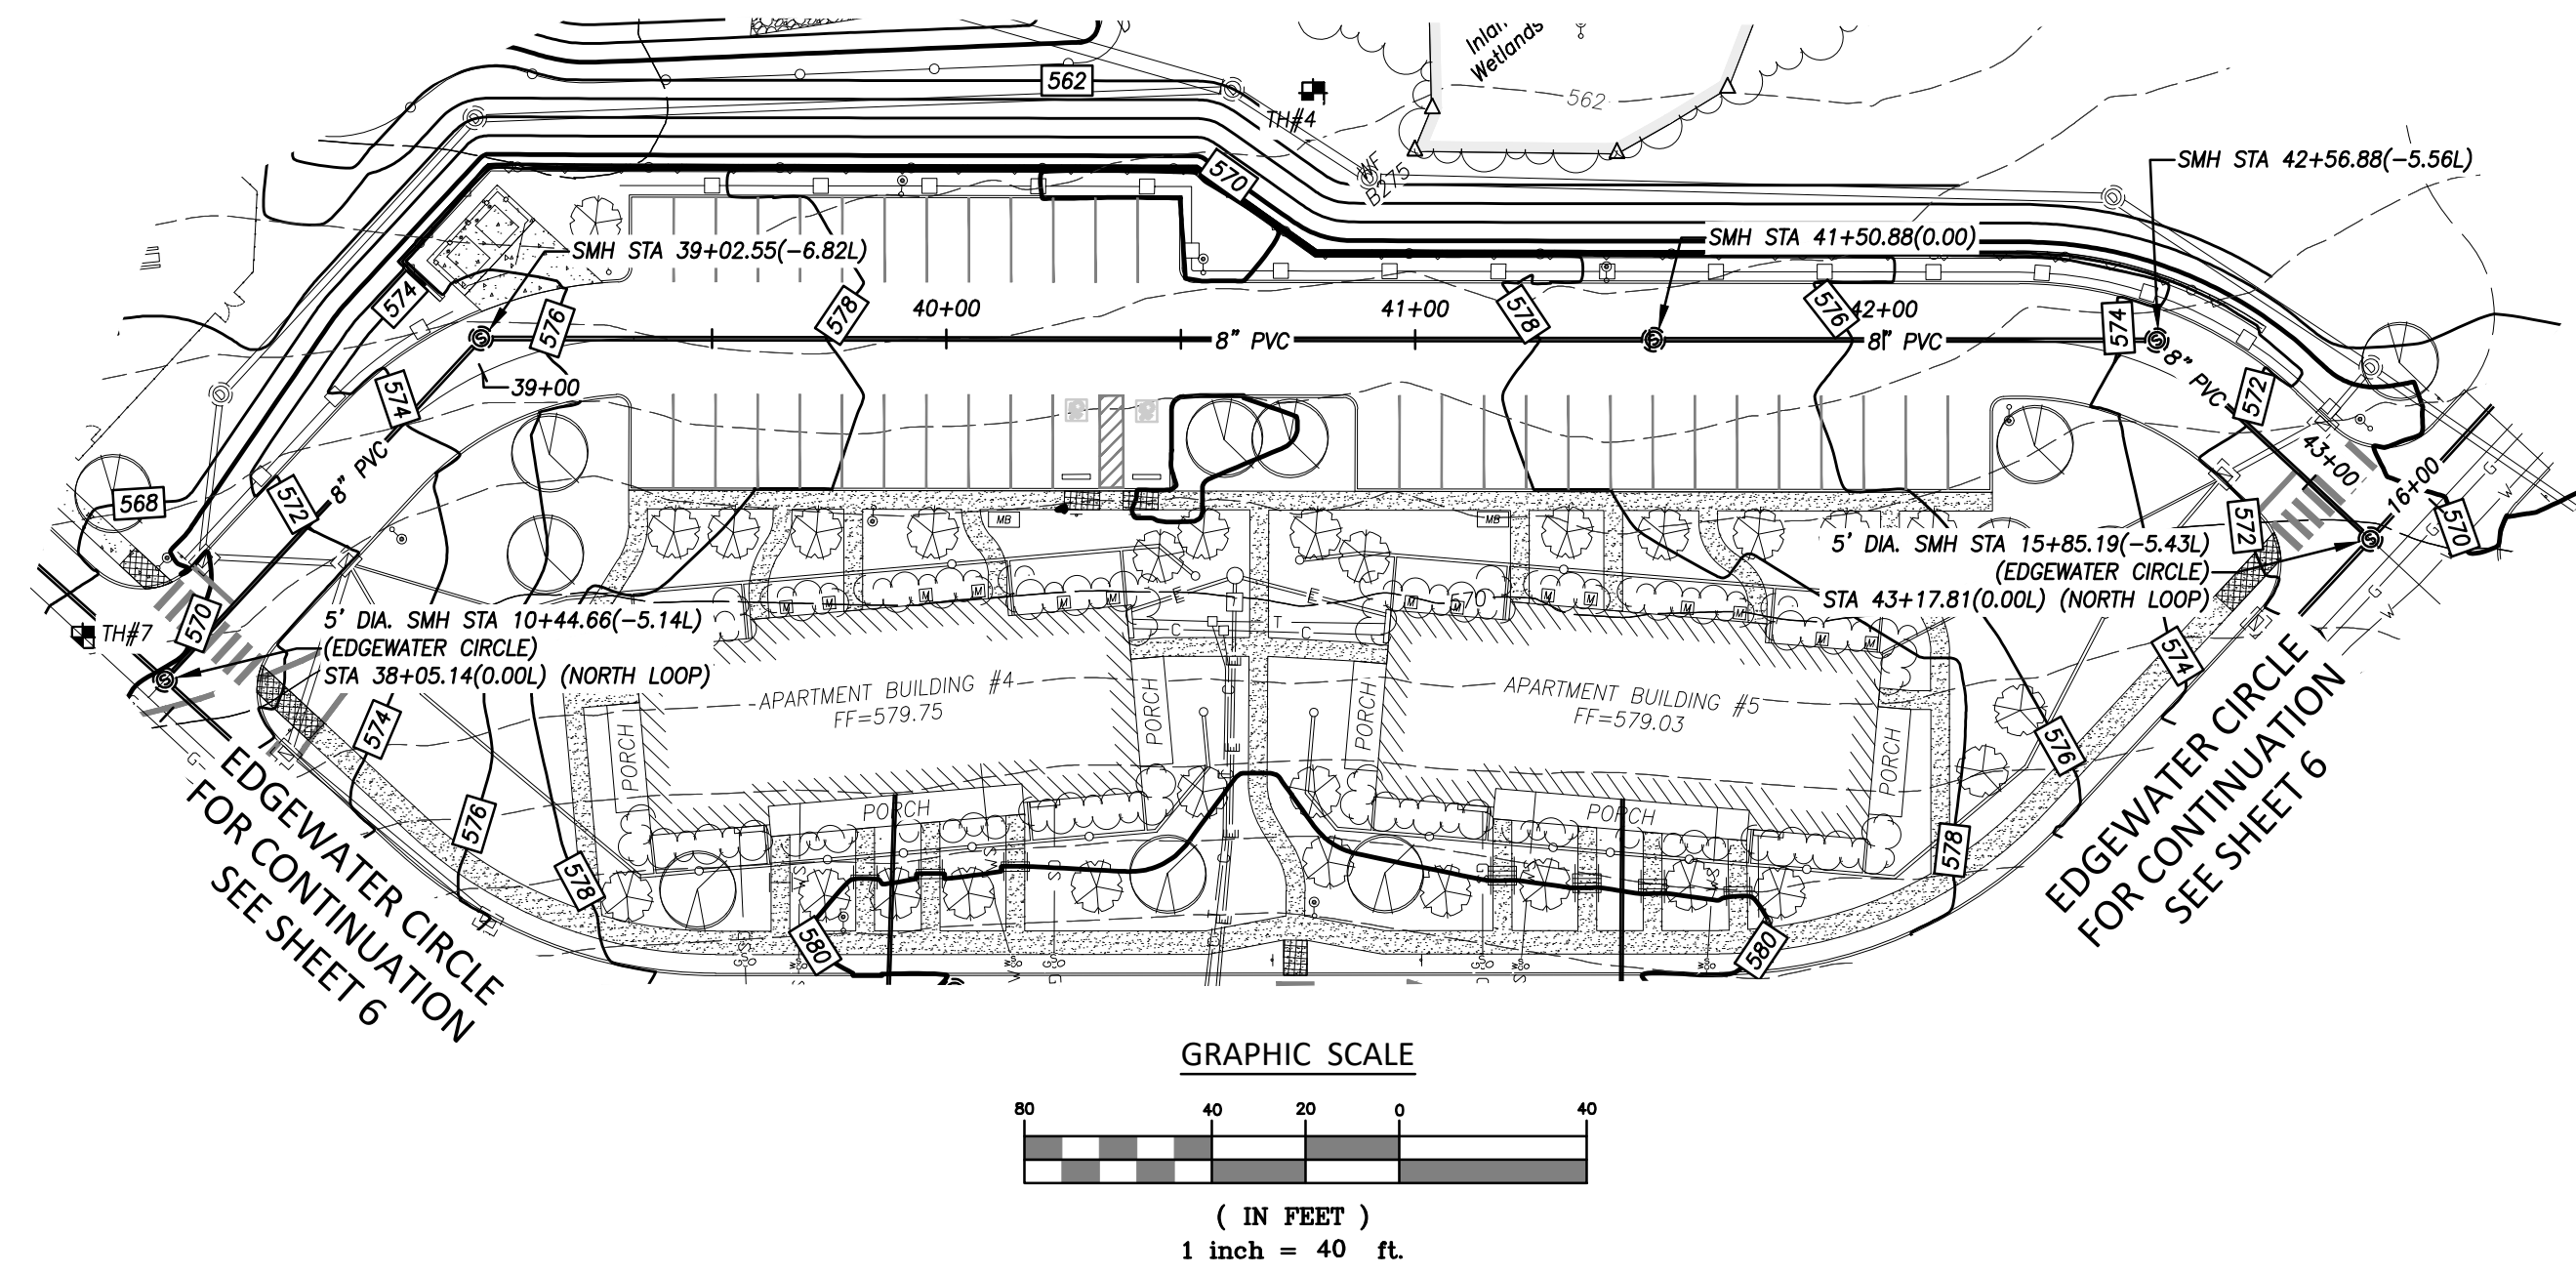


NOT FOR CONSTRUCTION
 1/29/2021

PLAN NOTES

- SEE COVER SHEET FOR ENGINEER AND SURVEYOR SIGNATURES AND SEALS.
- SEE SHEET 2 FOR LEGEND & ABBREVIATIONS.

Salt Pond Apartments at Edgewater Hill
 "North Loop Plan and Profile"
 Prepared for
 Edgewater Hill Enterprises, LLC
 000 East High Street - East Hampton, Connecticut






SCALE:	1" = 40'
DATE:	December 2020
JOB I.D. NO.:	20-2853
Revisions	
Rev. A -	IWWC Comments & Stormwater Quality - 1/18/21
Rev. B -	Per IWWC Conditions of Approval - 1/29/21

SHEET NO.

7

25


P:\CIVIL 3D PROJECTS\2020\20-2853 EDgewater-APARTMENTS\DWG\DESIGN\3 APARTMENT SITE PLAN.DWG

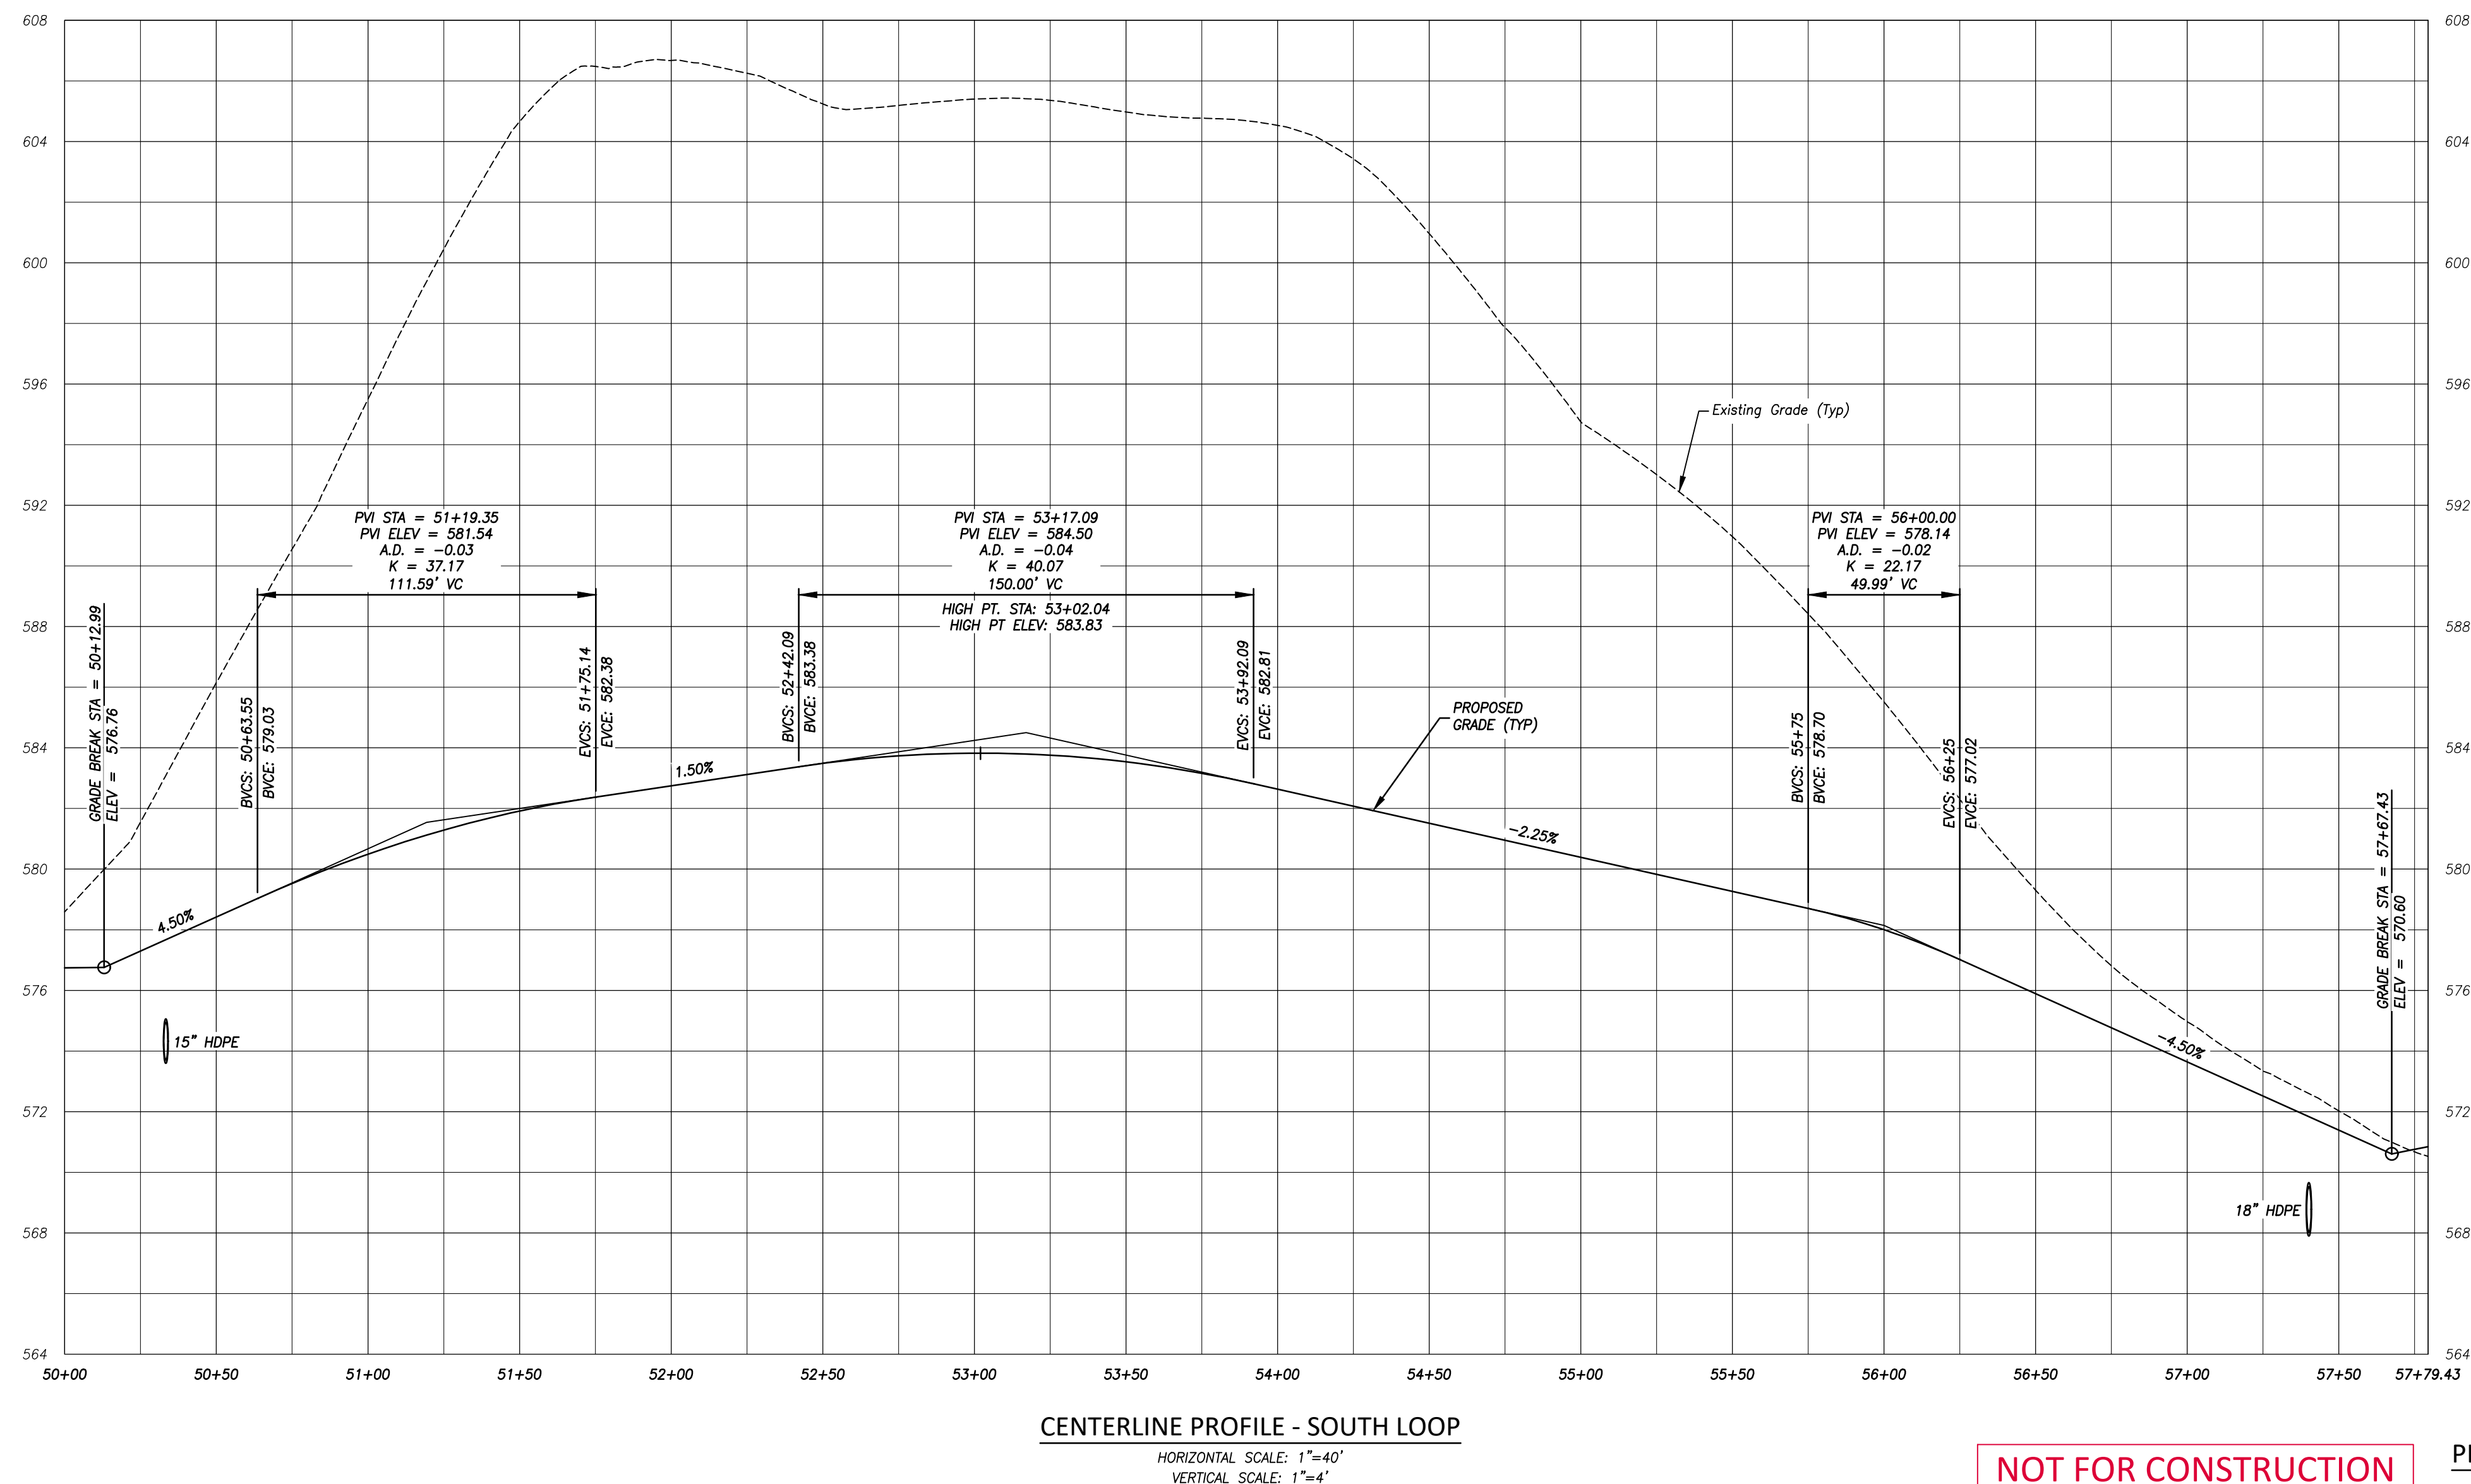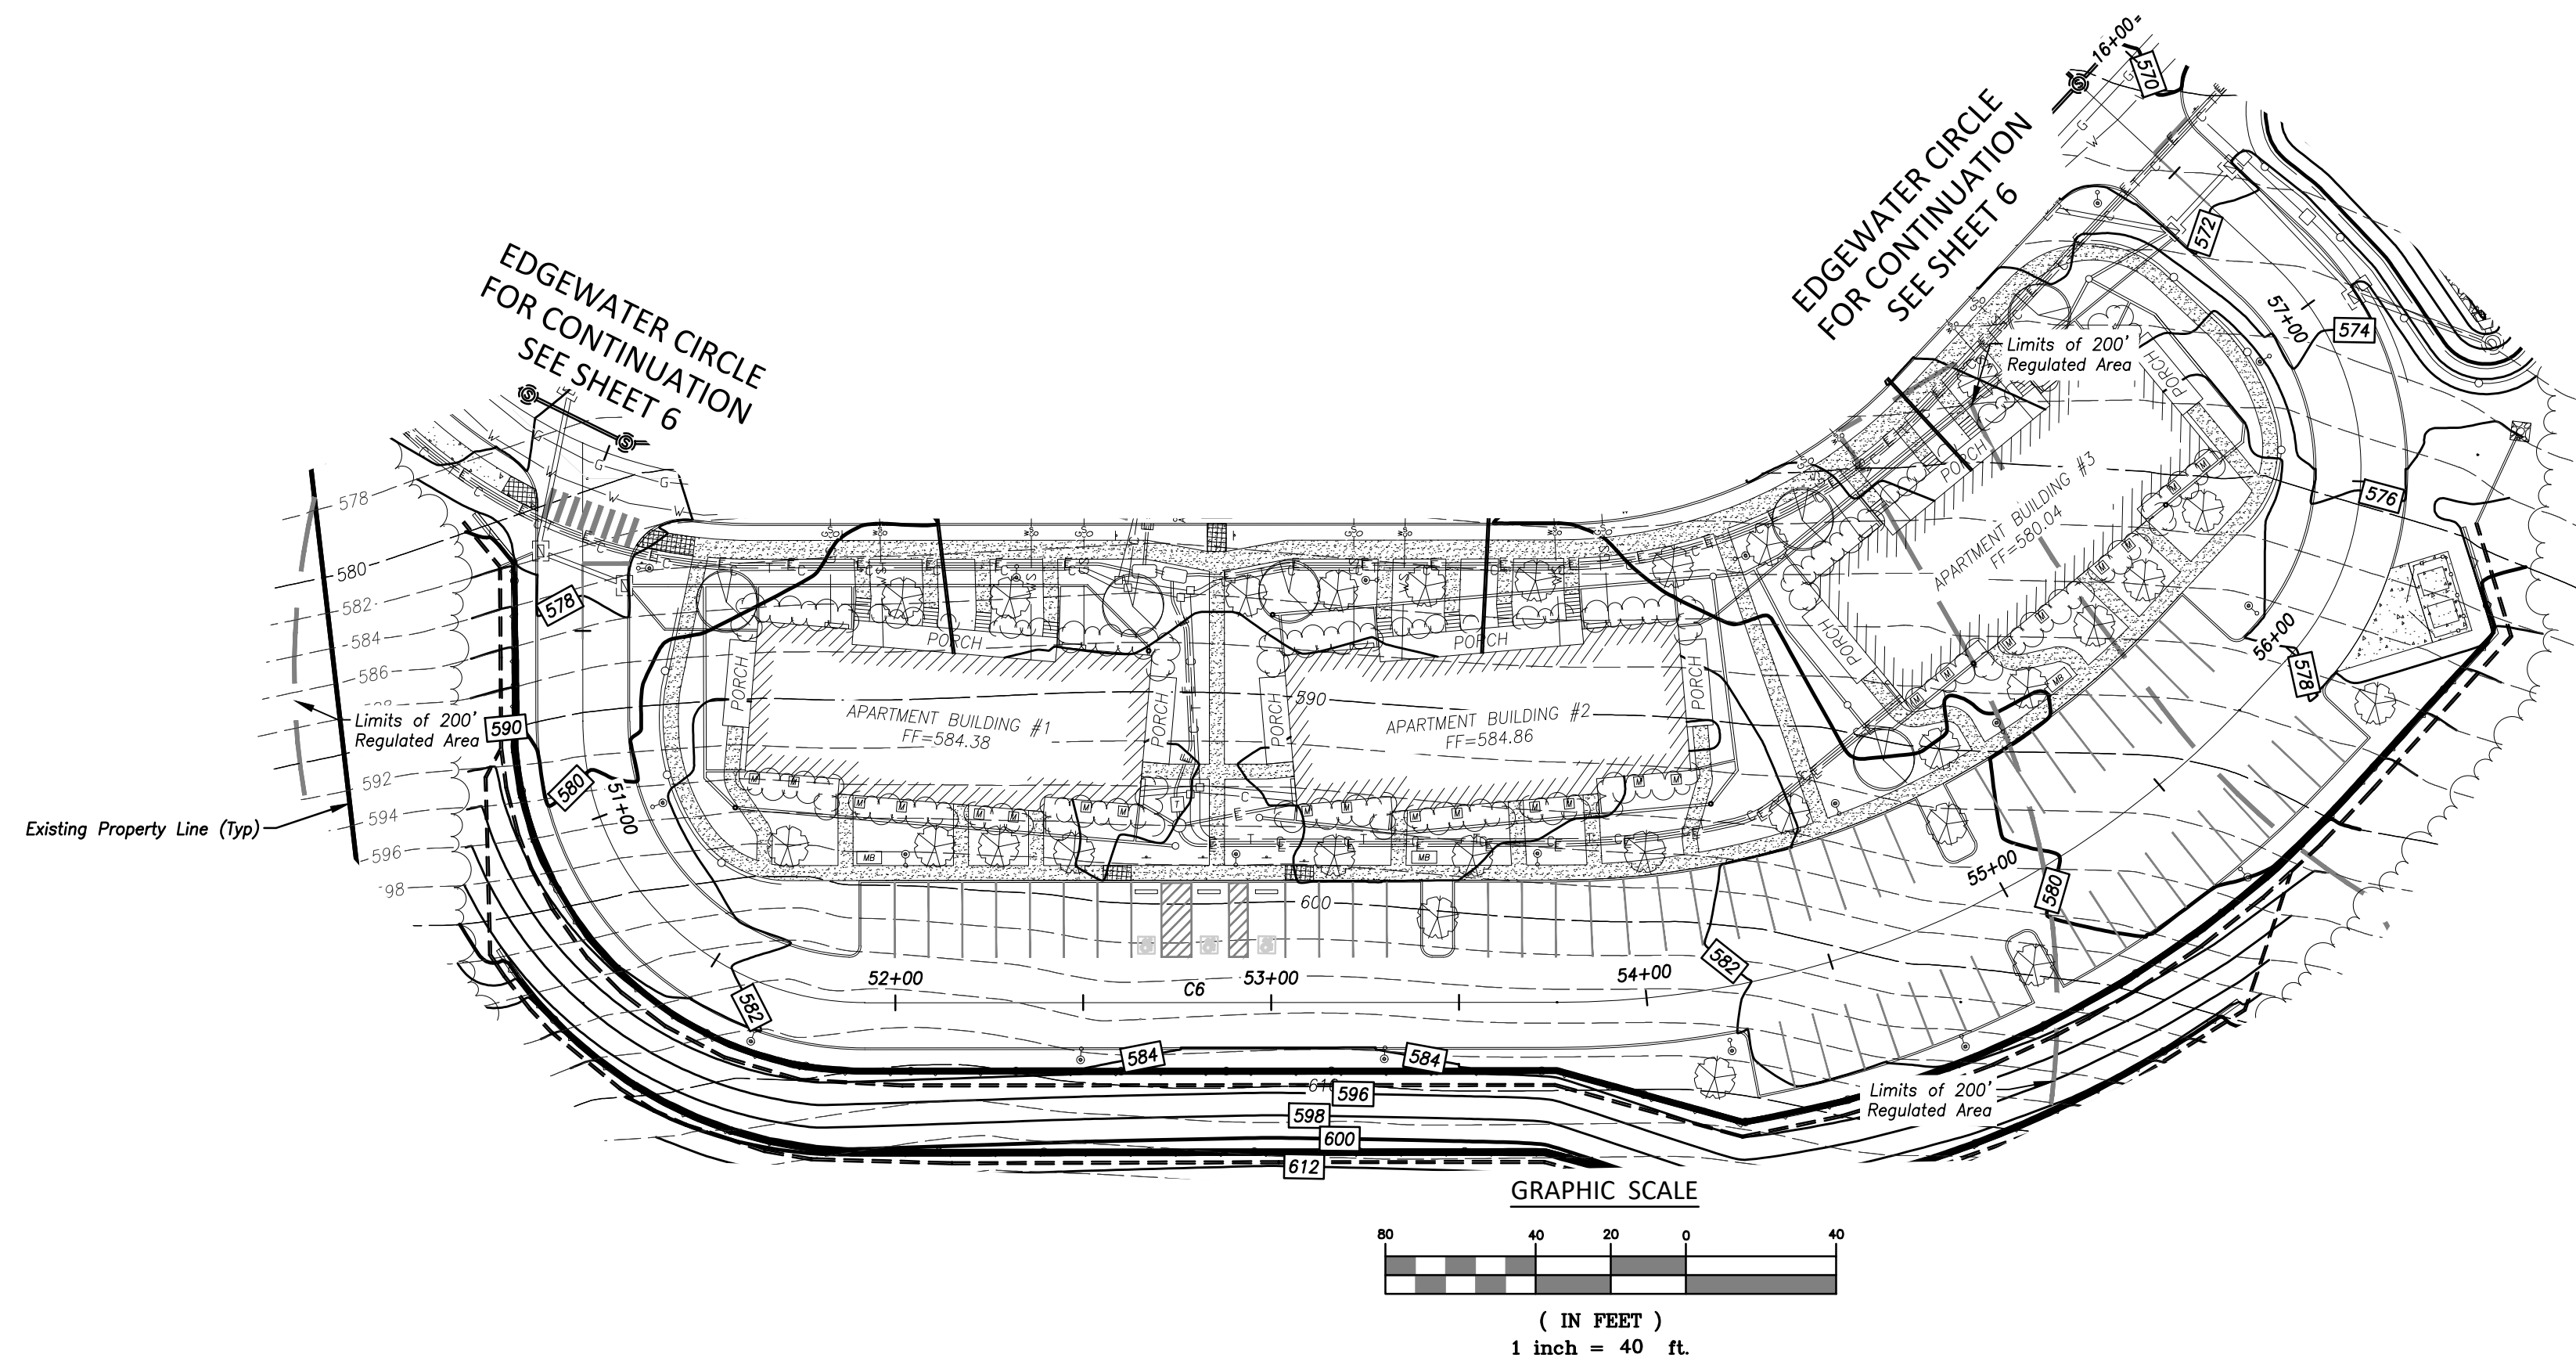


NOT FOR CONSTRUCTION
1/29/2021

PLAN NOTES

- SEE COVER SHEET FOR ENGINEER AND SURVEYOR SIGNATURES AND SEALS.
- SEE SHEET 2 FOR LEGEND & ABBREVIATIONS.

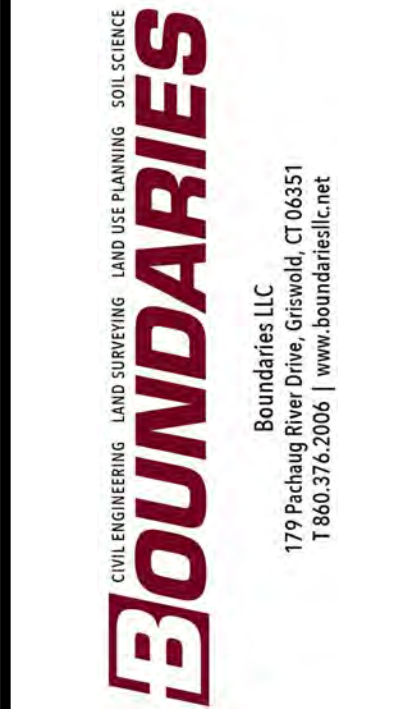


Salt Pond Apartments at Edgewater Hill
"South Loop Plan and Profile"
Prepared for
Edgewater Hill Enterprises, LLC
000 East High Street - East Hampton, Connecticut



SCALE:	1" = 40'
DATE:	December 2020
JOB I.D. NO.:	20-2853
Revisions	
Rev. A -	IWWC Comments & Stormwater Quality - 1/18/21
Rev. B -	Per IWWC Conditions of Approval - 1/29/21

SHEET NO.
8 / 25

Salt Pond Apartments at Edgewater Hill
 "Grading Plan"
 Prepared for
 Edgewater Hill Enterprises, LLC
 000 East High Street - East Hampton, Connecticut




SCALE: 1" = 30'
 DATE: December 2020
 JOB I.D. NO.: 20-2853
Revisions
 Rev. A - IWWC Comments & Stormwater Quality - 1/18/21
 Rev. B - Per IWWC Conditions of Approval - 1/29/21

SHEET NO.

9

25

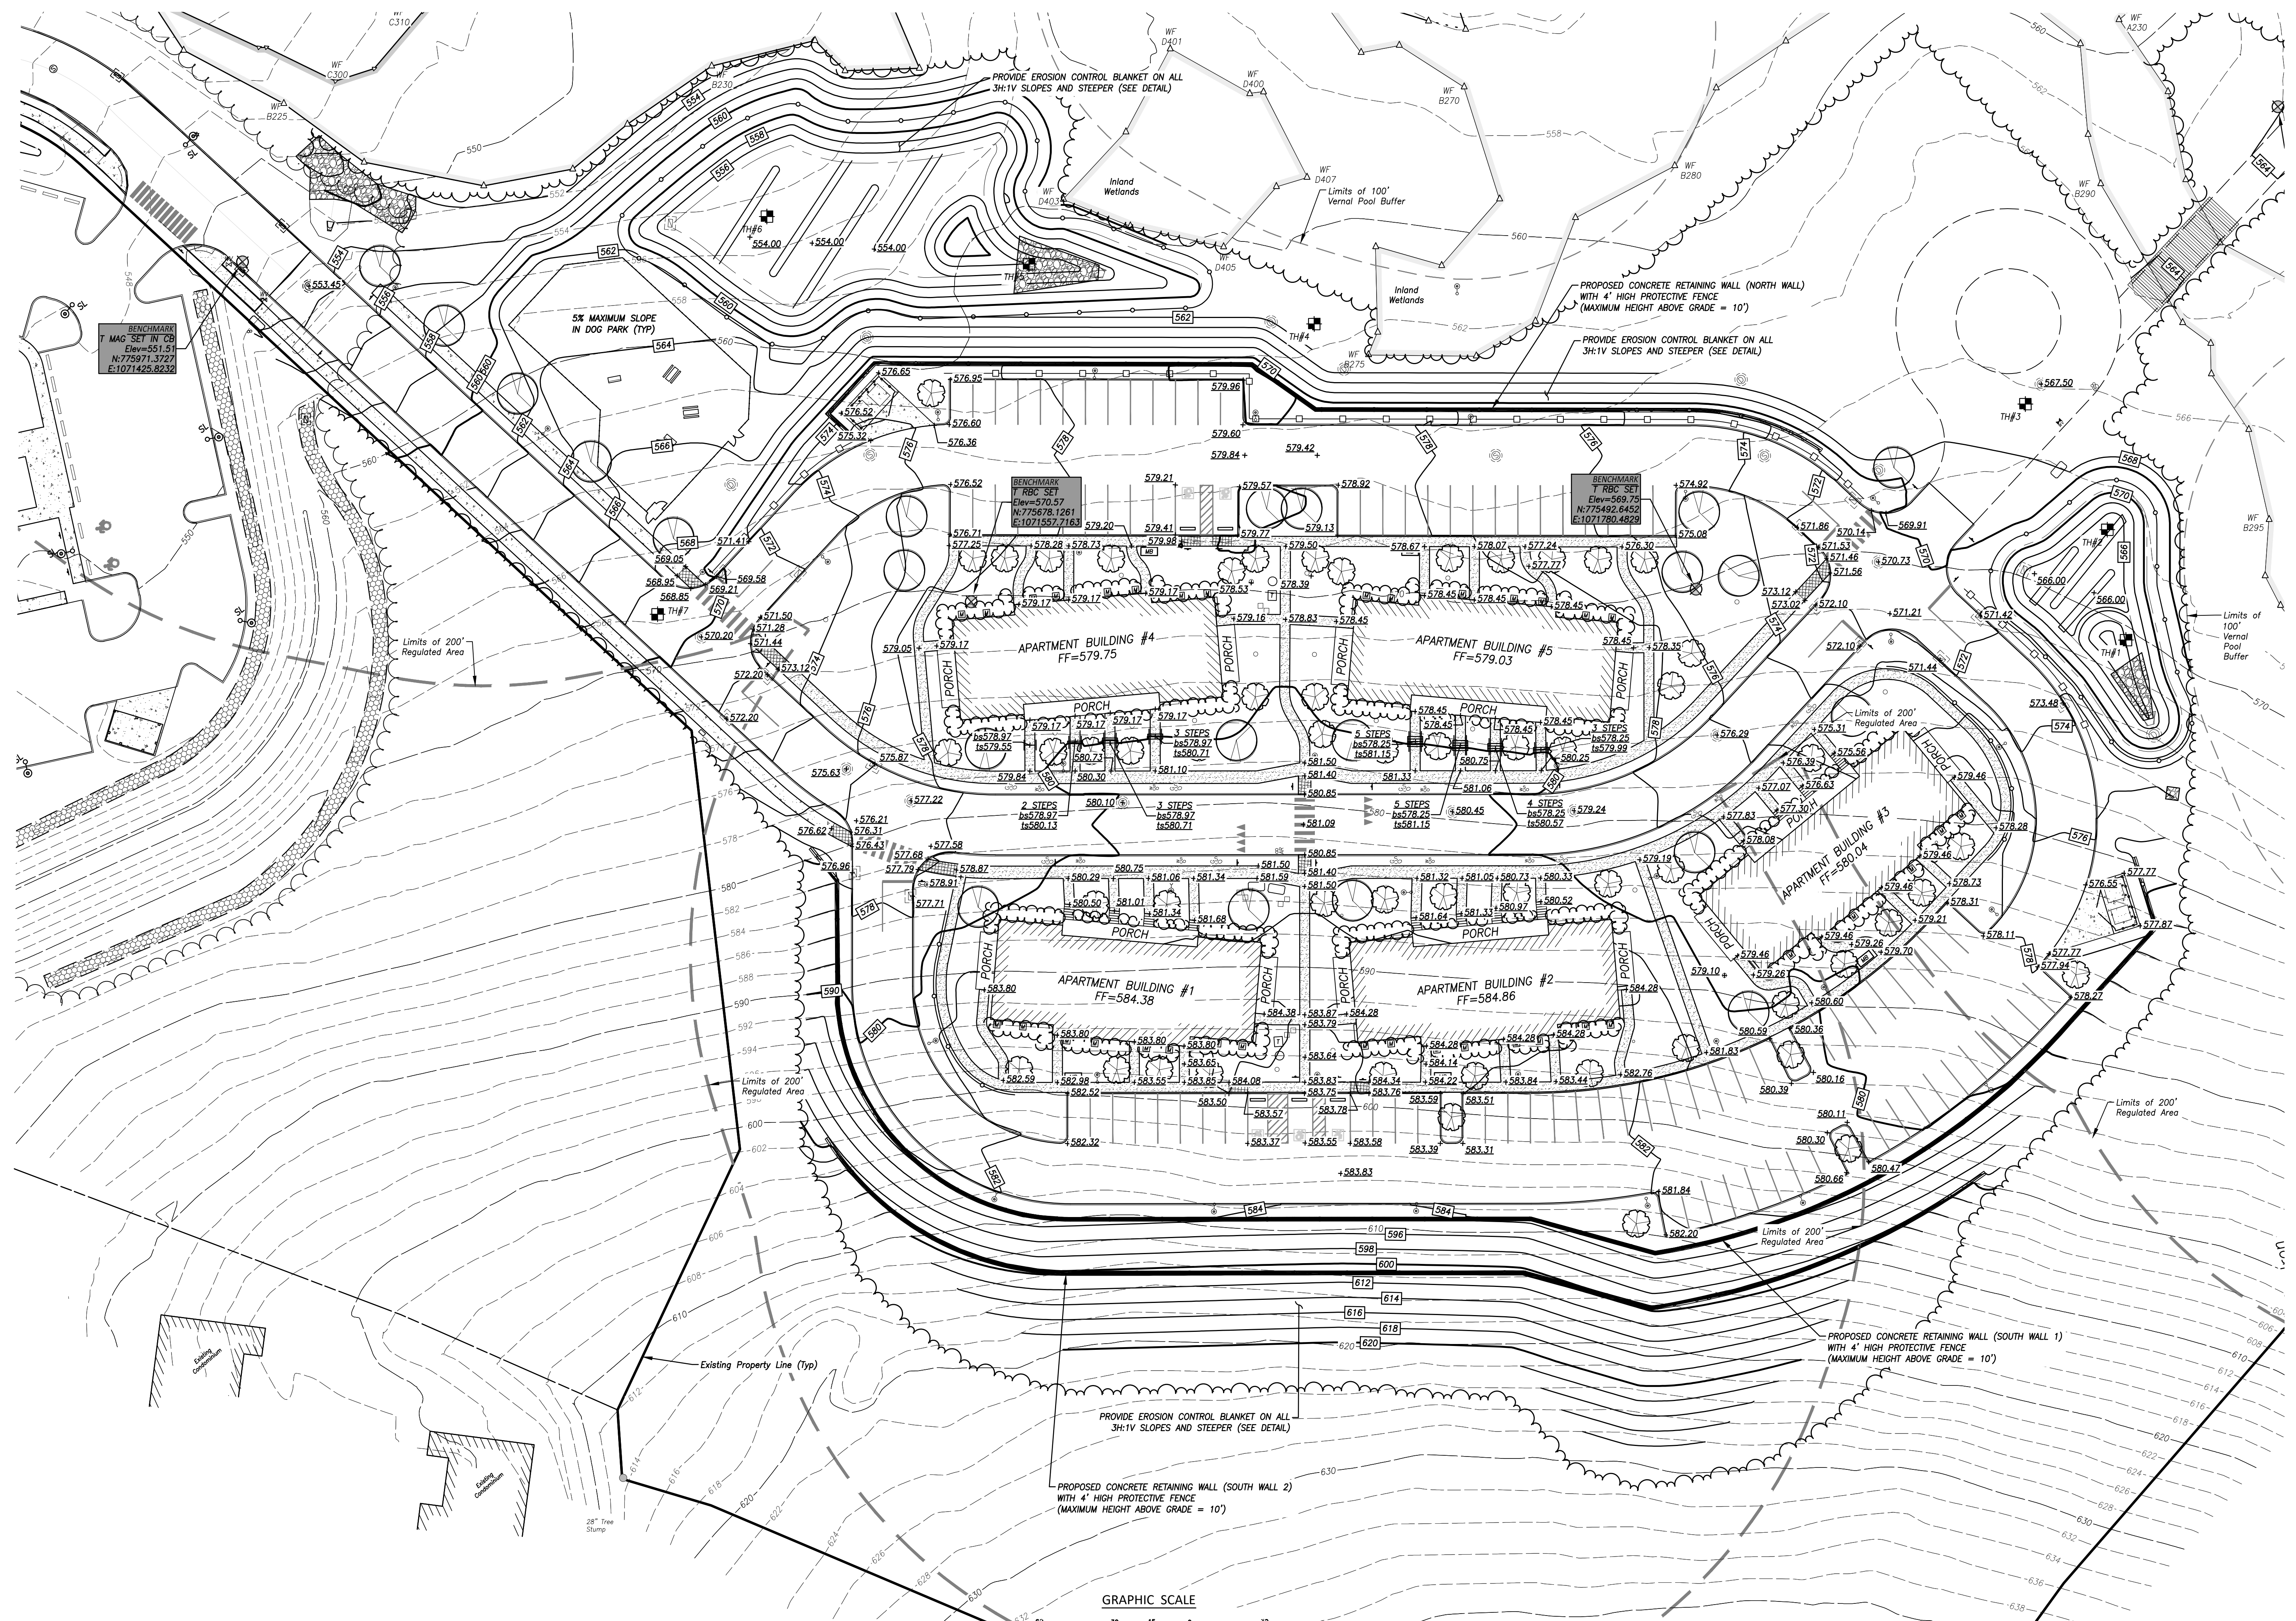


NOT FOR CONSTRUCTION
 1/29/2021

PLAN NOTES
 1. SEE COVER SHEET FOR ENGINEER AND SURVEYOR SIGNATURES AND SEALS.
 2. SEE SHEET 2 FOR LEGEND & ABBREVIATIONS.


P:\CIVIL 3D PROJECTS\2020\20-2853 EDGEWATER-APARTMENTS\DWG\DESIGN\3 APARTMENT SITE PLAN.DWG

B © 2020 BOUNDARIES LLC
 THIS DRAWING IS THE PROPERTY OF BOUNDARIES LLC AND HAS BEEN SPECIFICALLY PREPARED FOR THE OWNER OF THIS PROJECT. AT THIS SITE, AND IS NOT TO BE DUPLICATED OR USED IN PART OR WHOLE FOR ANY OTHER PURPOSE, PROJECT, LOCATION OR OWNER WITHOUT THE EXPRESSED WRITTEN CONSENT OF BOUNDARIES LLC.




SCALE:	1" = 30'
DATE:	December 2020
JOB ID. NO.:	20-2853
Revisions	
Rev. A -	IWWC Comments & Stormwater Quality - 1/18/21
Rev. B -	Per IWWC Conditions of Approval - 1/29/21

SHEET NO.	10
	25

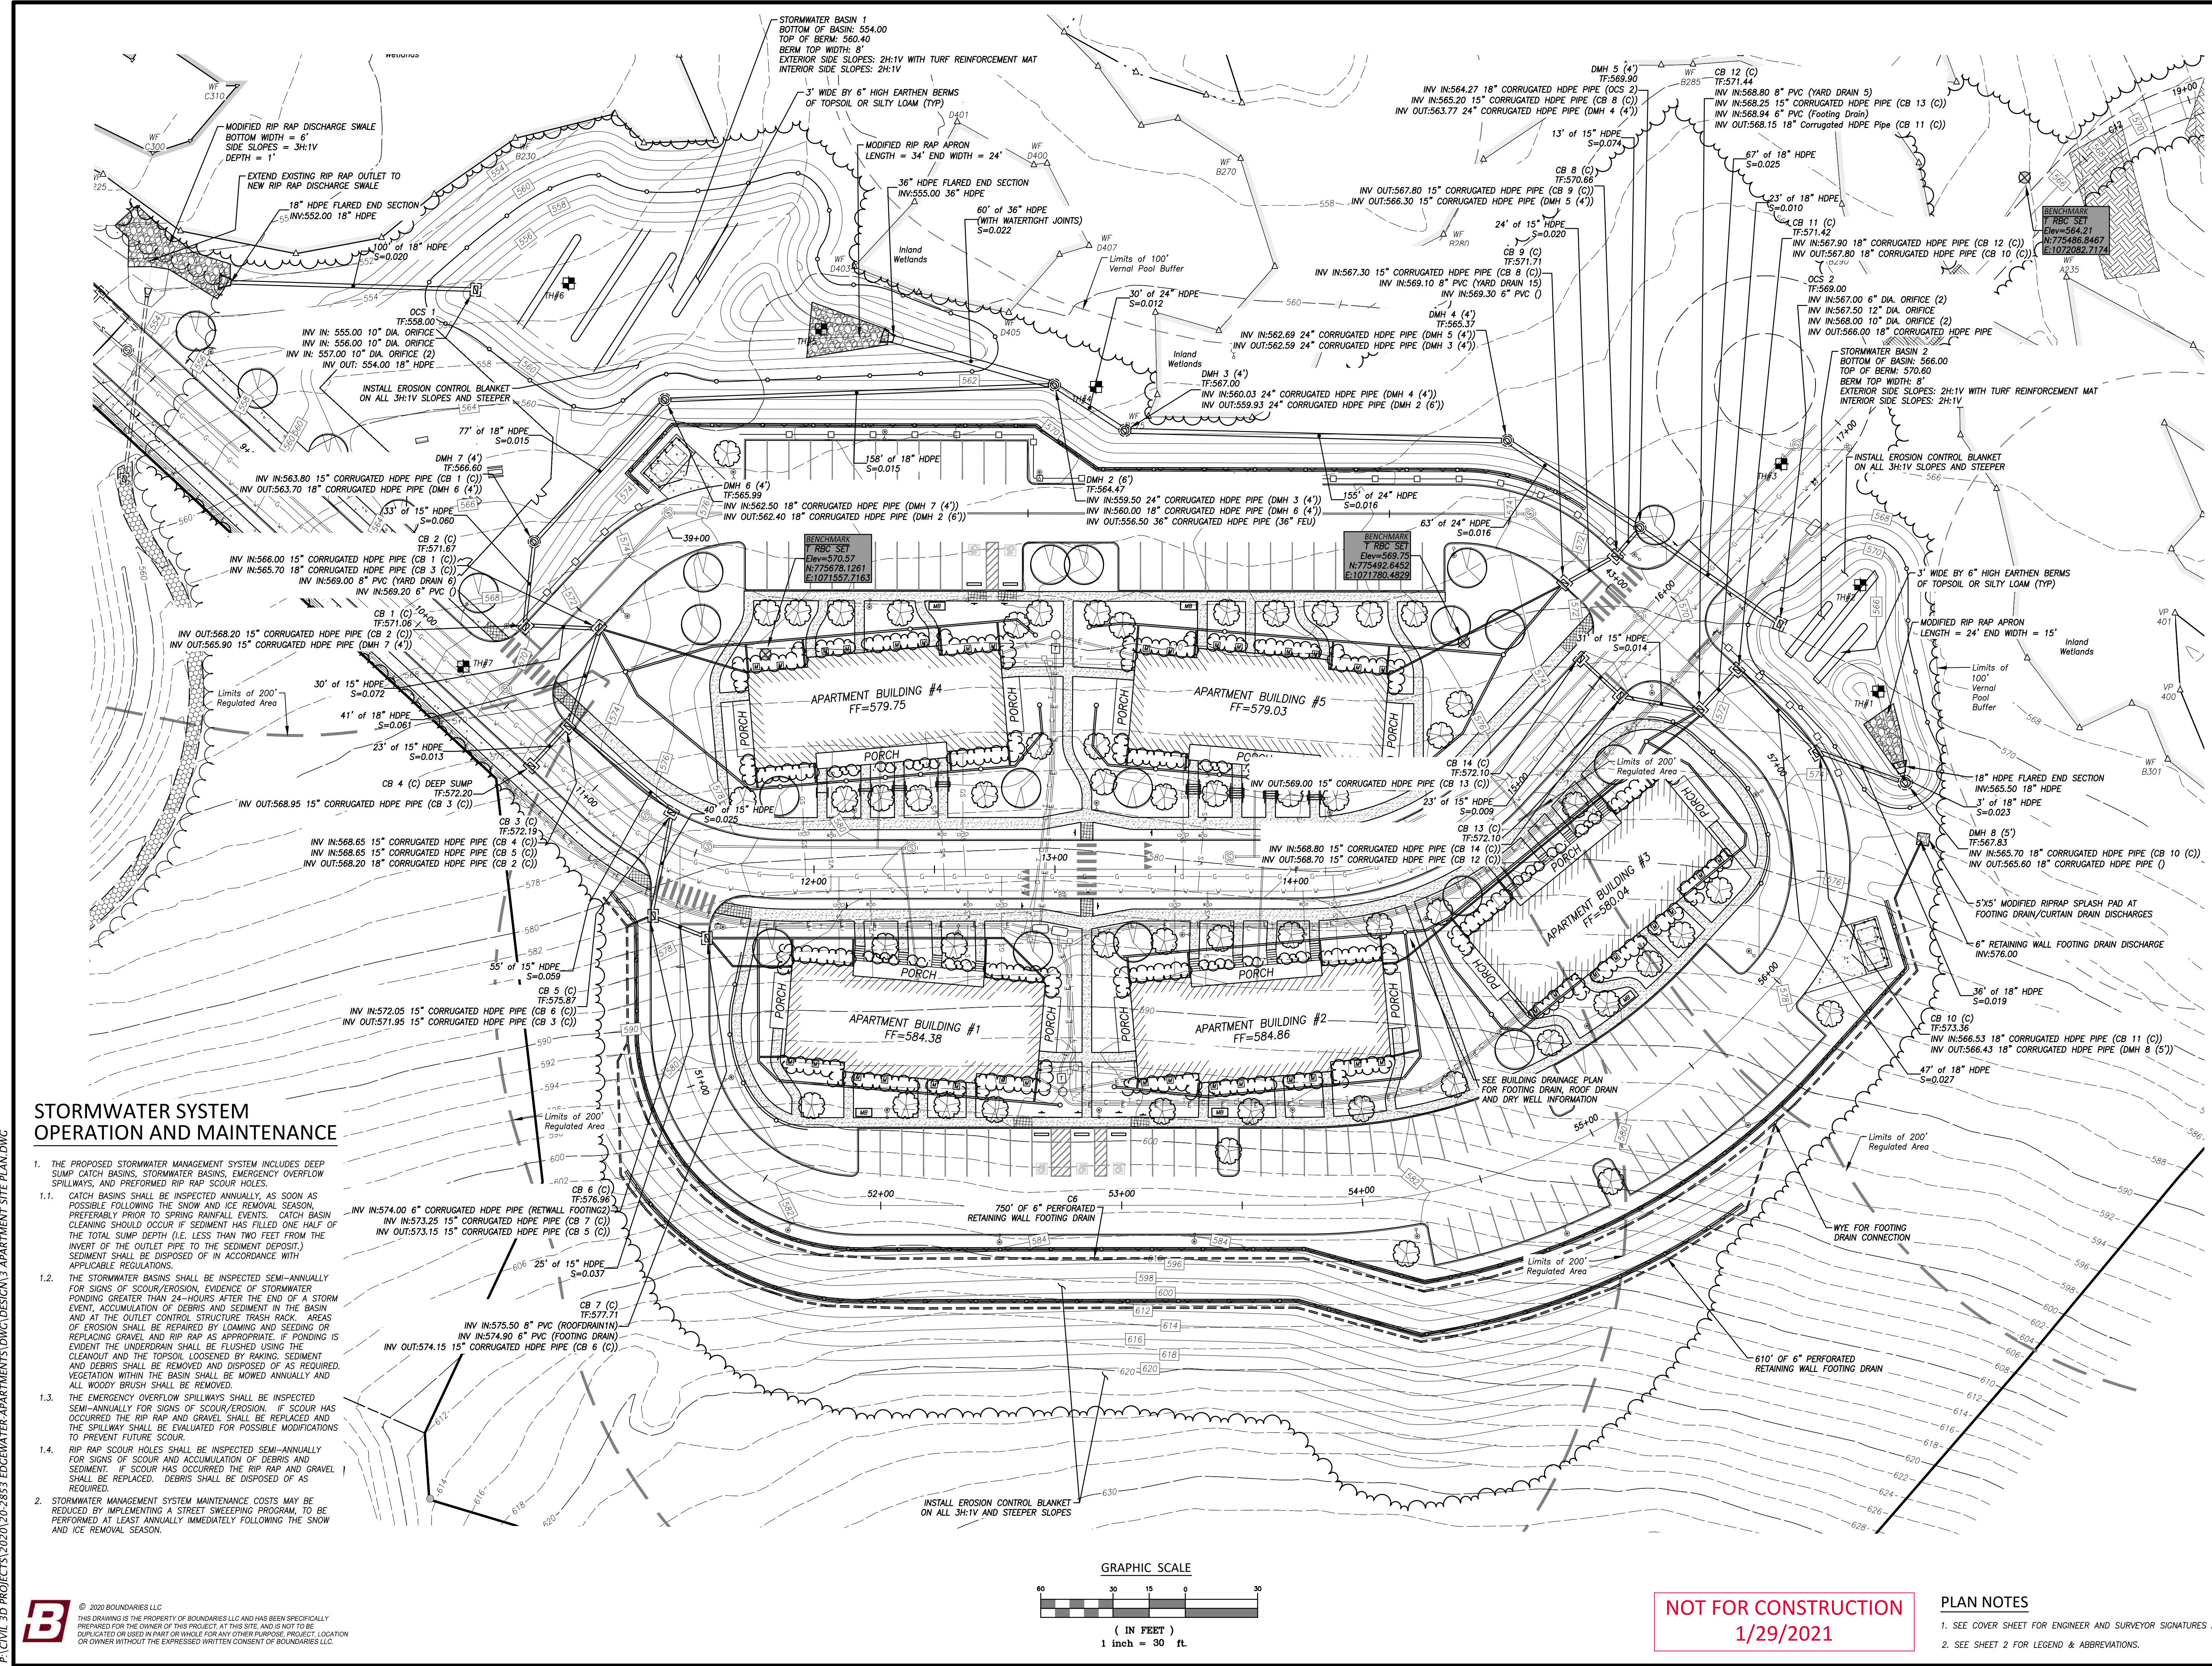

STORMWATER SYSTEM OPERATION AND MAINTENANCE


- THE PROPOSED STORMWATER MANAGEMENT SYSTEM INCLUDES DEEP SUMP CATCH BASINS, STORMWATER BASINS, EMERGENCY OVERFLOW SPILLWAYS, AND PREFORMED RIP RAP SCOUR HOLES.
 - CATCH BASINS SHALL BE INSPECTED ANNUALLY, AS SOON AS POSSIBLE FOLLOWING THE SNOW AND ICE REMOVAL SEASON, PREFERABLY PRIOR TO SPRING RAINFALL EVENTS. CATCH BASIN CLEANING SHOULD OCCUR IF SEDIMENT HAS FILLED ONE HALF OF THE TOTAL SUMP DEPTH (I.E. LESS THAN TWO FEET FROM THE INVERT OF THE OUTLET PIPE TO THE SEDIMENT DEPOSIT.) SEDIMENT SHALL BE DISPOSED OF IN ACCORDANCE WITH APPLICABLE REGULATIONS.
 - THE STORMWATER BASINS SHALL BE INSPECTED SEMI-ANNUALLY FOR SIGNS OF SCOUR/EROSION, EVIDENCE OF STORMWATER PONDING GREATER THAN 24-HOURS AFTER THE END OF A STORM EVENT, ACCUMULATION OF DEBRIS AND SEDIMENT IN THE BASIN AND AT THE OUTLET CONTROL STRUCTURE TRASH RACK. AREAS OF EROSION SHALL BE REPAIRED BY LOAMING AND SEEDING OR REPLACING GRAVEL AND RIP RAP AS APPROPRIATE. IF PONDING IS EVIDENT THE UNDERDRAIN SHALL BE FLUSHED USING THE CLEANOUT AND THE TOPSOIL LOOSENED BY RAKING. SEDIMENT AND DEBRIS SHALL BE REMOVED AND DISPOSED OF AS REQUIRED. VEGETATION WITHIN THE BASIN SHALL BE MOWED ANNUALLY AND ALL WOODY BRUSH SHALL BE REMOVED.
 - THE EMERGENCY OVERFLOW SPILLWAYS SHALL BE INSPECTED SEMI-ANNUALLY FOR SIGNS OF SCOUR/EROSION. IF SCOUR HAS OCCURRED THE RIP RAP AND GRAVEL SHALL BE REPLACED AND THE SPILLWAY SHALL BE EVALUATED FOR POSSIBLE MODIFICATIONS TO PREVENT FUTURE SCOUR.
 - RIP RAP SCOUR HOLES SHALL BE INSPECTED SEMI-ANNUALLY FOR SIGNS OF SCOUR AND ACCUMULATION OF DEBRIS AND SEDIMENT. IF SCOUR HAS OCCURRED THE RIP RAP AND GRAVEL SHALL BE REPLACED. DEBRIS SHALL BE DISPOSED OF AS REQUIRED.
- STORMWATER MANAGEMENT SYSTEM MAINTENANCE COSTS MAY BE REDUCED BY IMPLEMENTING A STREET SWEEPING PROGRAM TO BE PERFORMED AT LEAST ANNUALLY IMMEDIATELY FOLLOWING THE SNOW AND ICE REMOVAL SEASON.

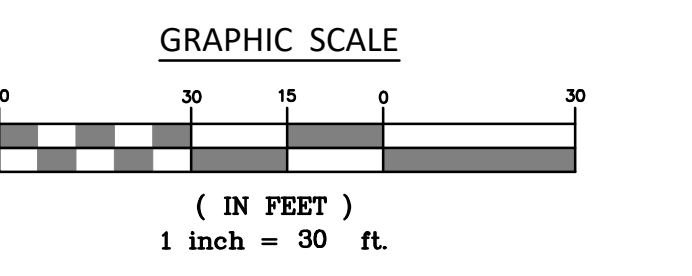

NOT FOR CONSTRUCTION
 1/29/2021

PLAN NOTES
 1. SEE COVER SHEET FOR ENGINEER AND SURVEYOR SIGNATURES AND SEALS.
 2. SEE SHEET 2 FOR LEGEND & ABBREVIATIONS.

Salt Pond Apartments at Edgewater Hill
 "Building Drainage Plan"
 Prepared for
 Edgewater Hill Enterprises, LLC
 000 East High Street - East Hampton, Connecticut





SCALE:	1" = 20'
DATE:	December 2020
JOB I.D. NO.:	20-2853
Revisions	
Rev. A -	IWWC Comments & Stormwater Quality - 1/18/21
Rev. B -	Per IWWC Conditions of Approval - 1/29/21

SHEET NO.

11

25

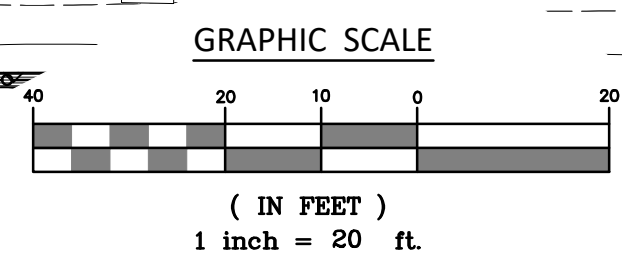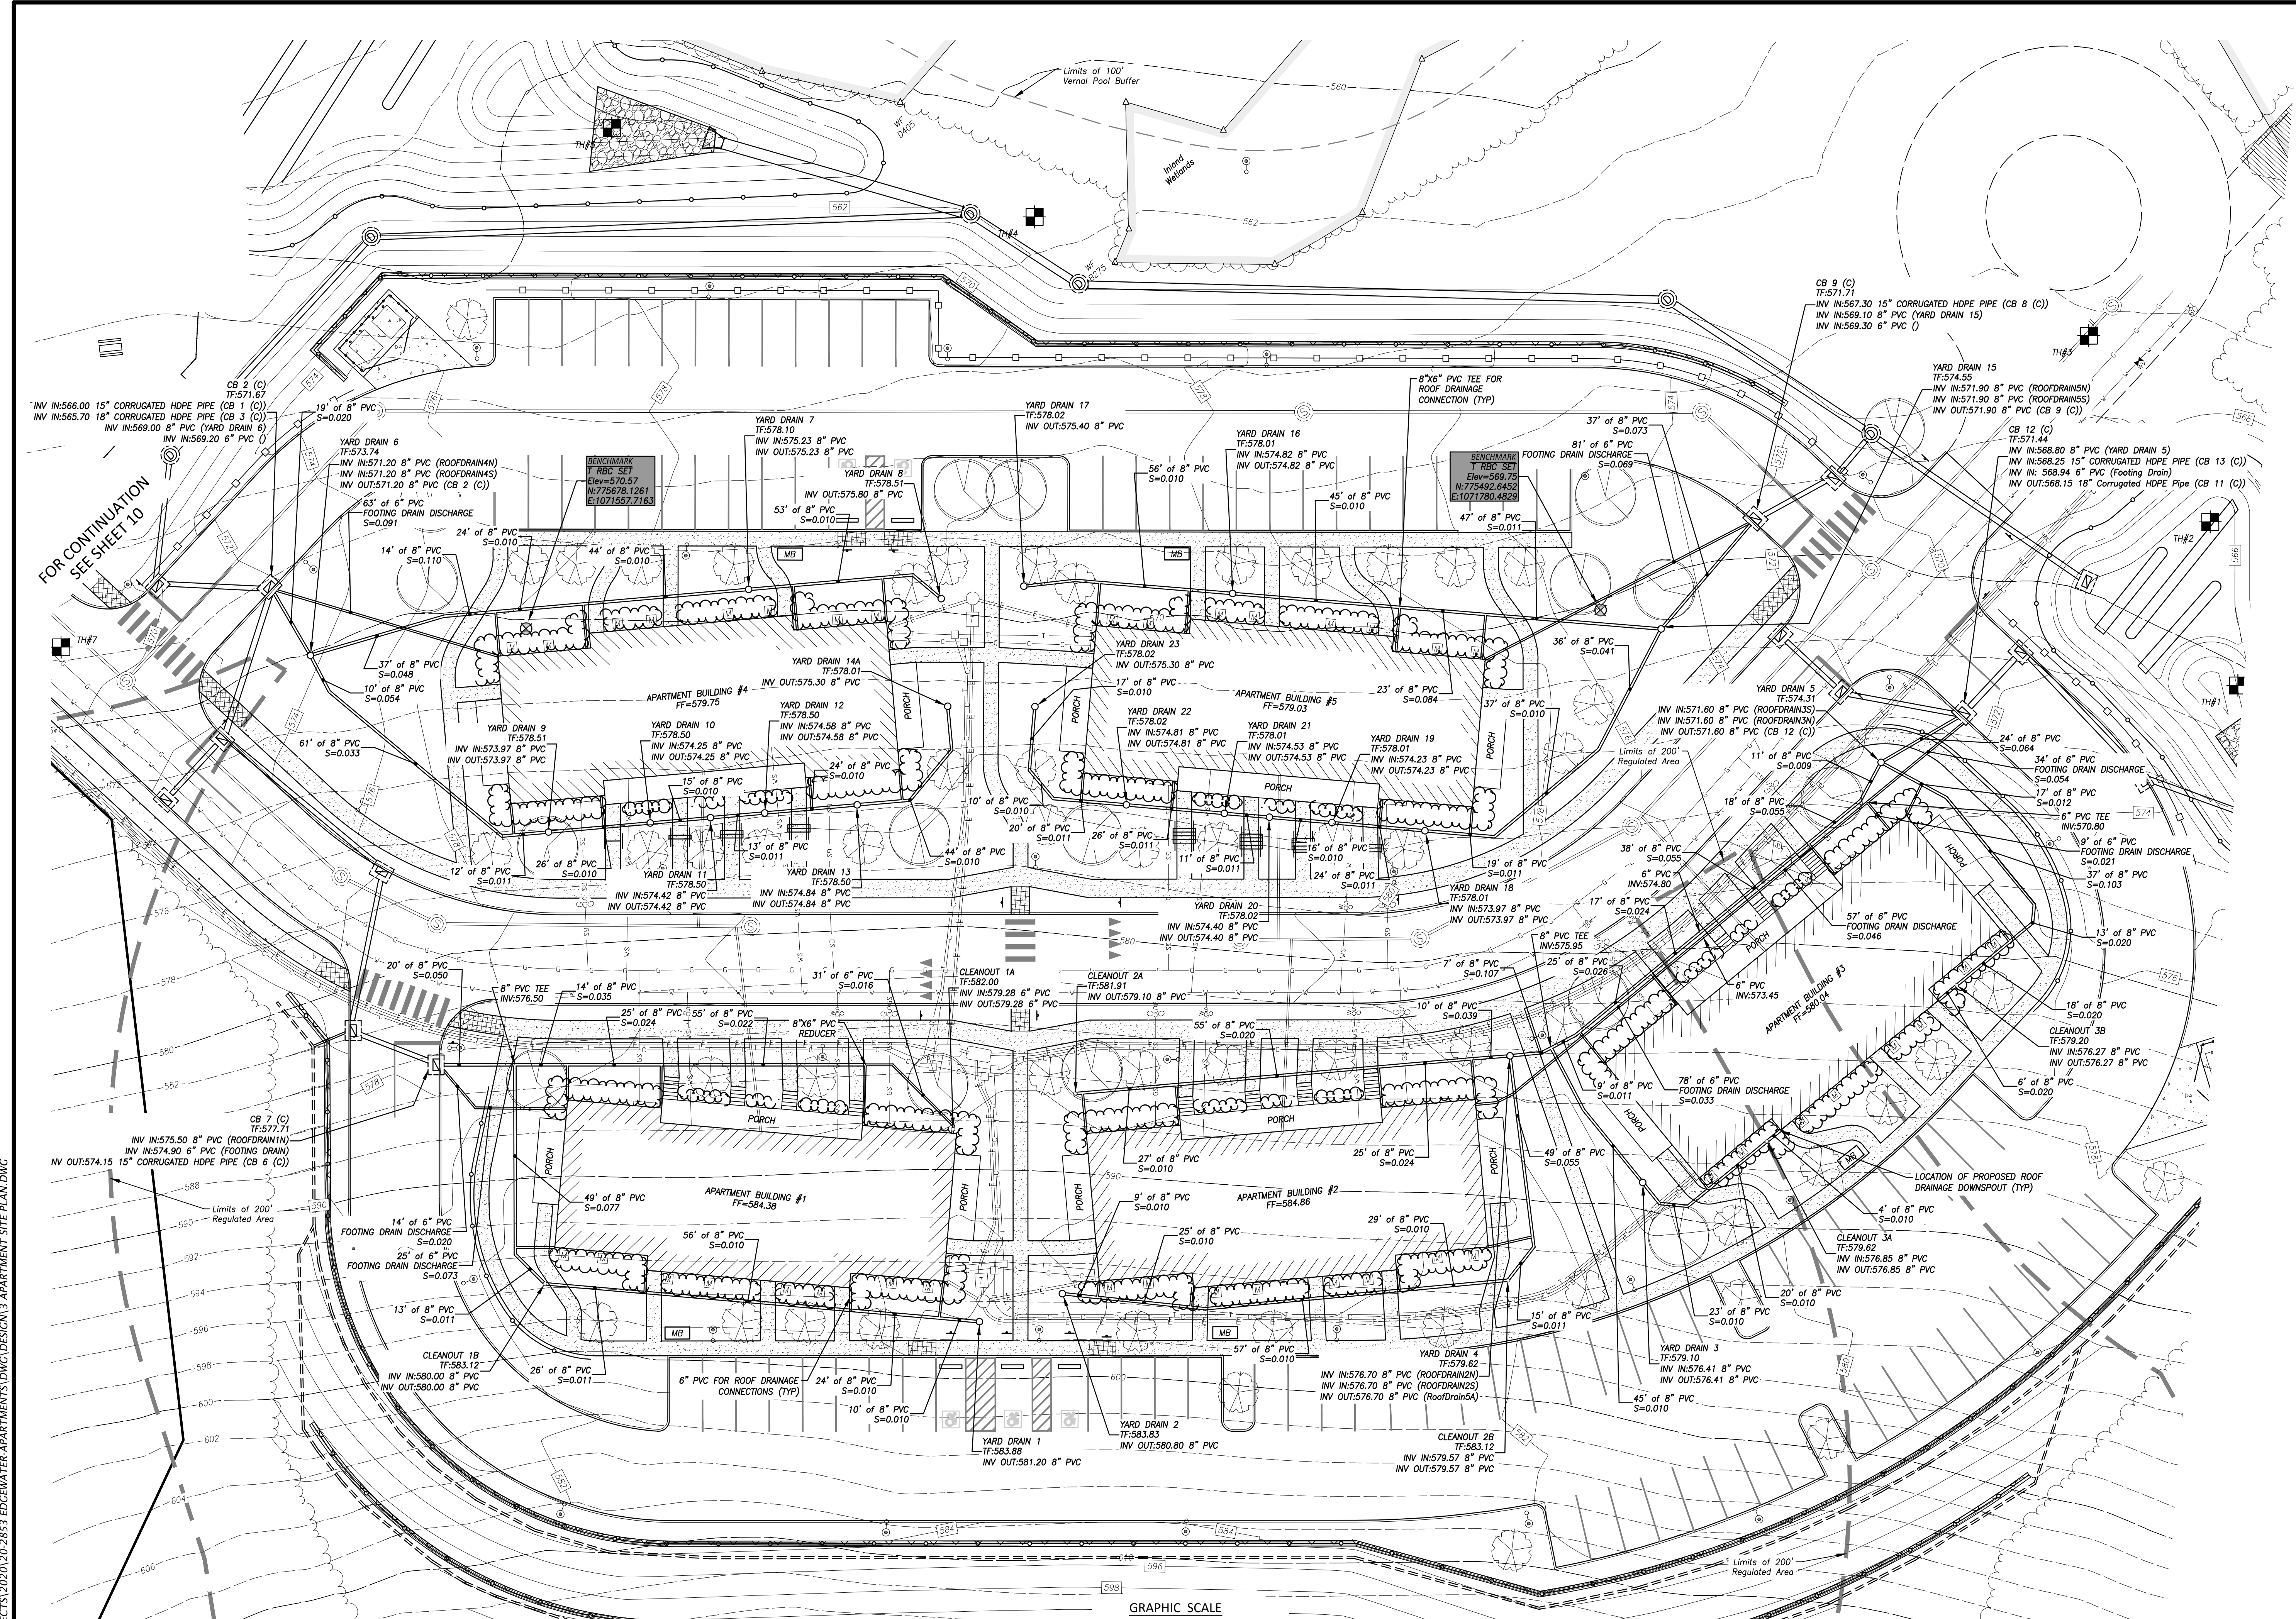


NOT FOR CONSTRUCTION
 1/29/2021

PLAN NOTES
 1. SEE COVER SHEET FOR ENGINEER AND SURVEYOR SIGNATURES AND SEALS.
 2. SEE SHEET 2 FOR LEGEND & ABBREVIATIONS.


P:\CIVIL 3D PROJECTS\2020\20-2853 EDGEGWATER-APARTMENTS\DWG\DESIGN\3 APARTMENT SITE PLAN.DWG

B © 2020 BOUNDARIES LLC
 THIS DRAWING IS THE PROPERTY OF BOUNDARIES LLC AND HAS BEEN SPECIFICALLY
 PREPARED FOR THE OWNER OF THIS PROJECT. AT THIS SITE, AND IS NOT TO BE
 DUPLICATED OR USED IN PART OR WHOLE FOR ANY OTHER PURPOSE. PROJECT, LOCATION
 OR OWNER WITHOUT THE EXPRESSED WRITTEN CONSENT OF BOUNDARIES LLC.




SCALE:	1" = 30'
DATE:	December 2020
JOB I.D. NO.:	20-2853
Revisions	
Rev. A -	IWWC Comments & Stormwater Quality - 1/18/21
Rev. B -	Per IWWC Conditions of Approval - 1/29/21

SHEET NO.	12
	25

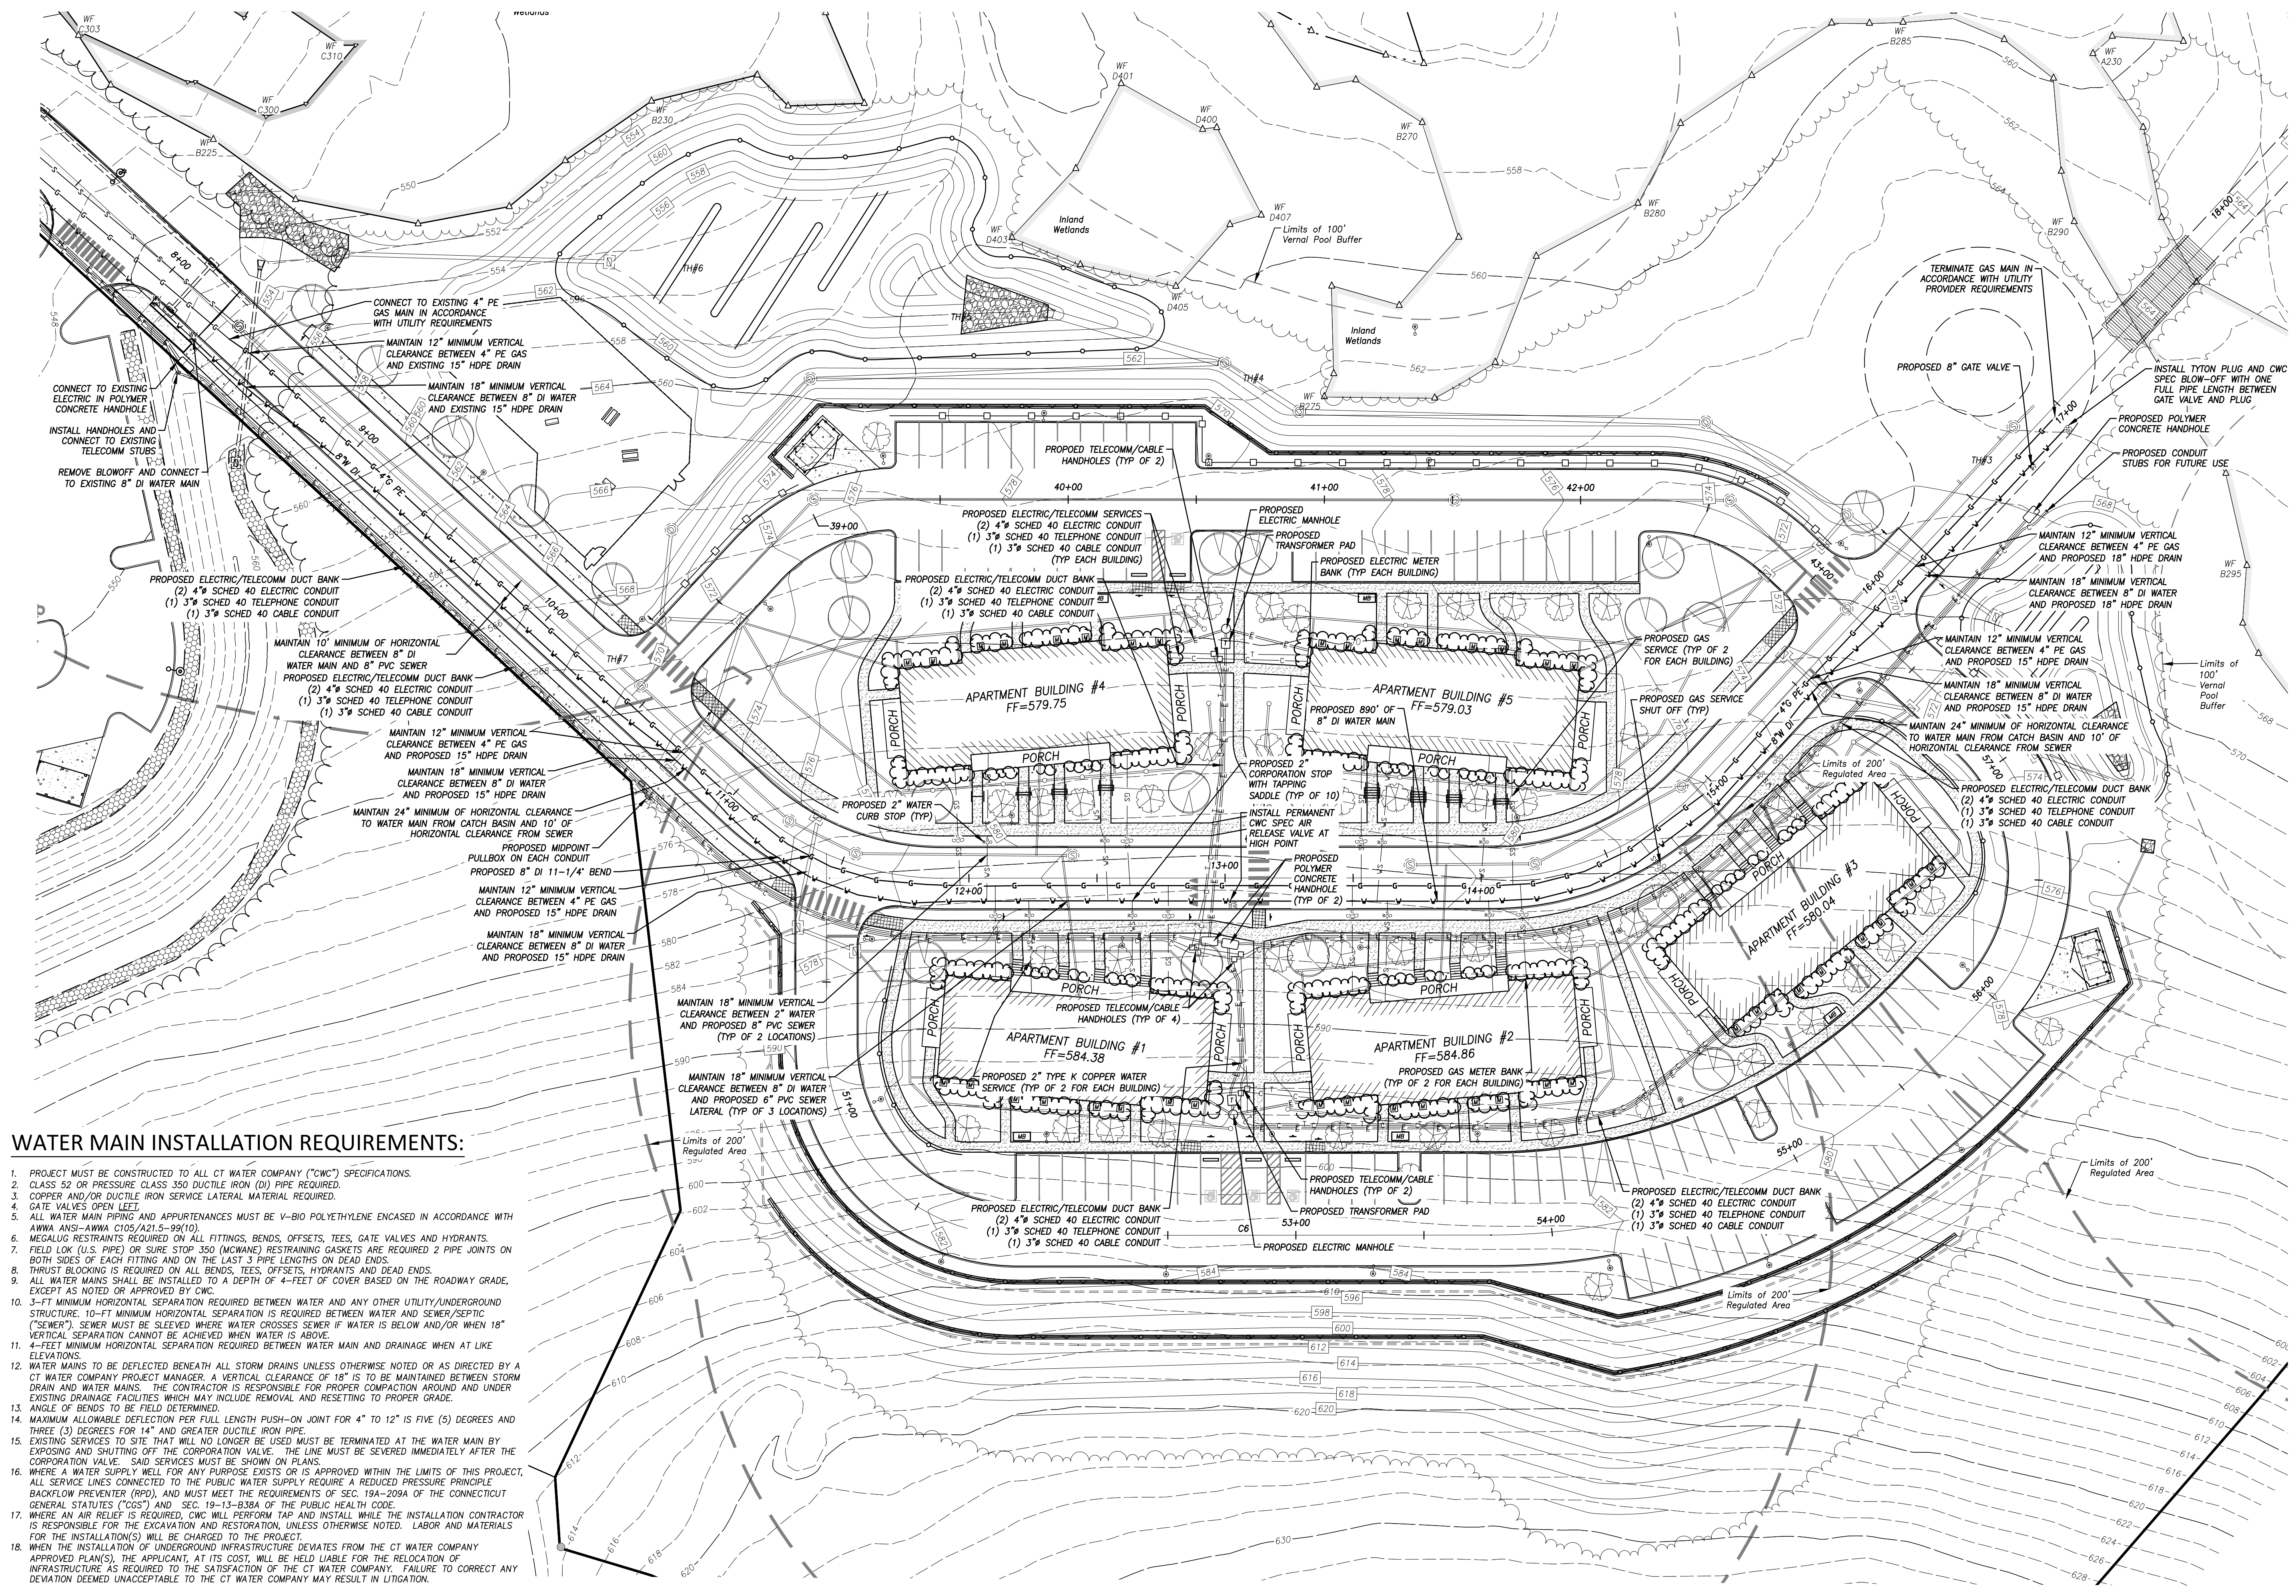

WATER MAIN INSTALLATION REQUIREMENTS:

- PROJECT MUST BE CONSTRUCTED TO ALL CT WATER COMPANY ("CWC") SPECIFICATIONS.
- CLASS 52 OR PRESSURE CLASS 350 DUCTILE IRON (DI) PIPE REQUIRED.
- COPPER AND/OR DUCTILE IRON SERVICE LATERAL MATERIAL REQUIRED.
- GATE VALVES OPEN LEFT.
- ALL WATER MAIN PIPING AND APPURTENANCES MUST BE V-BIO POLYETHYLENE ENCASED IN ACCORDANCE WITH AWWA ANSI-AWWA C105/A215-99(10).
- MEGALUG RESTRAINTS REQUIRED ON ALL FITTINGS, BENDS, OFFSETS, TEES, GATE VALVES AND HYDRANTS.
- FIELD LOK (U.S. PIPE) OR SURE STOP 350 (MCWANE) RESTRAINING GASKETS ARE REQUIRED 2 PIPE JOINTS ON BOTH SIDES OF EACH FITTING AND ON THE LAST 3 PIPE LENGTHS ON DEAD ENDS.
- THRUST BLOCKING IS REQUIRED ON ALL BENDS, TEES, OFFSETS, HYDRANTS AND DEAD ENDS.
- ALL WATER MAINS SHALL BE INSTALLED TO A DEPTH OF 4- FEET OF COVER BASED ON THE ROADWAY GRADE, EXCEPT AS NOTED OR APPROVED BY CWC.
- 3- FT MINIMUM HORIZONTAL SEPARATION REQUIRED BETWEEN WATER AND ANY OTHER UTILITY/UNDERGROUND STRUCTURE. 10- FT MINIMUM HORIZONTAL SEPARATION IS REQUIRED BETWEEN WATER AND SEWER/SEPTIC ("SEWER"). SEWER MUST BE SLEEVED WHERE WATER CROSSES SEWER IF WATER IS BELOW AND/OR WHEN 18" VERTICAL SEPARATION CANNOT BE ACHIEVED WHEN WATER IS ABOVE.
- 4- FEET MINIMUM HORIZONTAL SEPARATION REQUIRED BETWEEN WATER MAIN AND DRAINAGE WHEN AT LIKE ELEVATIONS.
- WATER MAINS TO BE DEFLECTED BENEATH ALL STORM DRAINS UNLESS OTHERWISE NOTED OR AS DIRECTED BY A CT WATER COMPANY PROJECT MANAGER. A VERTICAL CLEARANCE OF 18" IS TO BE MAINTAINED BETWEEN STORM DRAIN AND WATER MAINS. THE CONTRACTOR IS RESPONSIBLE FOR PROPER COMPACTION AROUND AND UNDER EXISTING DRAINAGE FACILITIES WHICH MAY INCLUDE REMOVAL AND RESETTling TO PROPER GRADE. ANGLE OF BENDS TO BE FIELD DETERMINED.
- MAXIMUM ALLOWABLE DEFLECTION PER FULL LENGTH PUSH-ON JOINT FOR 4" TO 12" IS FIVE (5) DEGREES AND THREE (3) DEGREES FOR 14" AND GREATER DUCTILE IRON PIPE.
- EXISTING SERVICES TO SITE THAT WILL NO LONGER BE USED MUST BE TERMINATED AT THE WATER MAIN BY EXPOSING AND SHUTTING OFF THE CORPORATION VALVE. THE LINE MUST BE SEVERED IMMEDIATELY AFTER THE CORPORATION VALVE. SAID SERVICES MUST BE SHOWN ON PLANS.
- WHERE A WATER SUPPLY WELL FOR ANY PURPOSE EXISTS OR IS APPROVED WITHIN THE LIMITS OF THIS PROJECT, ALL SERVICE LINES CONNECTED TO THE PUBLIC WATER SUPPLY REQUIRE A REDUCED PRESSURE PRINCIPLE BACKFLOW PREVENTER (RPD), AND MUST MEET THE REQUIREMENTS OF SEC. 19A-209A OF THE CONNECTICUT GENERAL STATUTES ("CGS") AND SEC. 19-13-B38A OF THE PUBLIC HEALTH CODE.
- WHERE AN AIR RELIEF IS REQUIRED, CWC WILL PERFORM TAP AND INSTALL WHILE THE INSTALLATION CONTRACTOR IS RESPONSIBLE FOR THE EXCAVATION AND RESTORATION, UNLESS OTHERWISE NOTED. LABOR AND MATERIALS FOR THE INSTALLATION(S) WILL BE CHARGED TO THE PROJECT.
- WHEN THE INSTALLATION OF UNDERGROUND INFRASTRUCTURE DEVIATES FROM THE CT WATER COMPANY APPROVED PLAN(S), THE APPLICANT, AT ITS COST, WILL BE HELD LIABLE FOR THE RELOCATION OF INFRASTRUCTURE AS REQUIRED TO THE SATISFACTION OF THE CT WATER COMPANY. FAILURE TO CORRECT ANY DEVIATION DEEMED UNACCEPTABLE TO THE CT WATER COMPANY MAY RESULT IN LITIGATION.

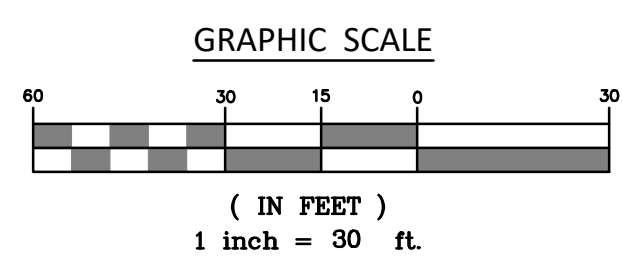

NOT FOR CONSTRUCTION
 1/29/2021


PLAN NOTES

- SEE COVER SHEET FOR ENGINEER AND SURVEYOR SIGNATURES AND SEALS.
- SEE SHEET 2 FOR LEGEND & ABBREVIATIONS.

P:\CIVIL 3D PROJECTS\2020\20-2853 EDGEWATER-APARTMENTS\DWG\DESIGN\3 APARTMENT SITE PLAN.DWG


B © 2020 BOUNDARIES LLC
 THIS DRAWING IS THE PROPERTY OF BOUNDARIES LLC AND HAS BEEN SPECIFICALLY
 PREPARED FOR THE OWNER OF THIS PROJECT. AT THIS SITE, AND IS NOT TO BE
 REPRODUCED OR USED IN PART OR WHOLE FOR ANY OTHER PURPOSE. PROJECT, LOCATION
 OR OWNER WITHOUT THE EXPRESSED WRITTEN CONSENT OF BOUNDARIES LLC.

Salt Pond Apartments at Edgewater Hill
 "Landscape Plan"
 Prepared for
 Edgewater Hill Enterprises, LLC
 000 East High Street - East Hampton, Connecticut



SCALE: 1" = 30'
 DATE: December 2020
 JOB I.D. NO. 20-2853
Revisions
 Rev. A - IWWC Comments & Stormwater Quality - 1/18/21
 Rev. B - Per IWWC Conditions of Approval - 1/29/21



SHEET NO. 13
 25

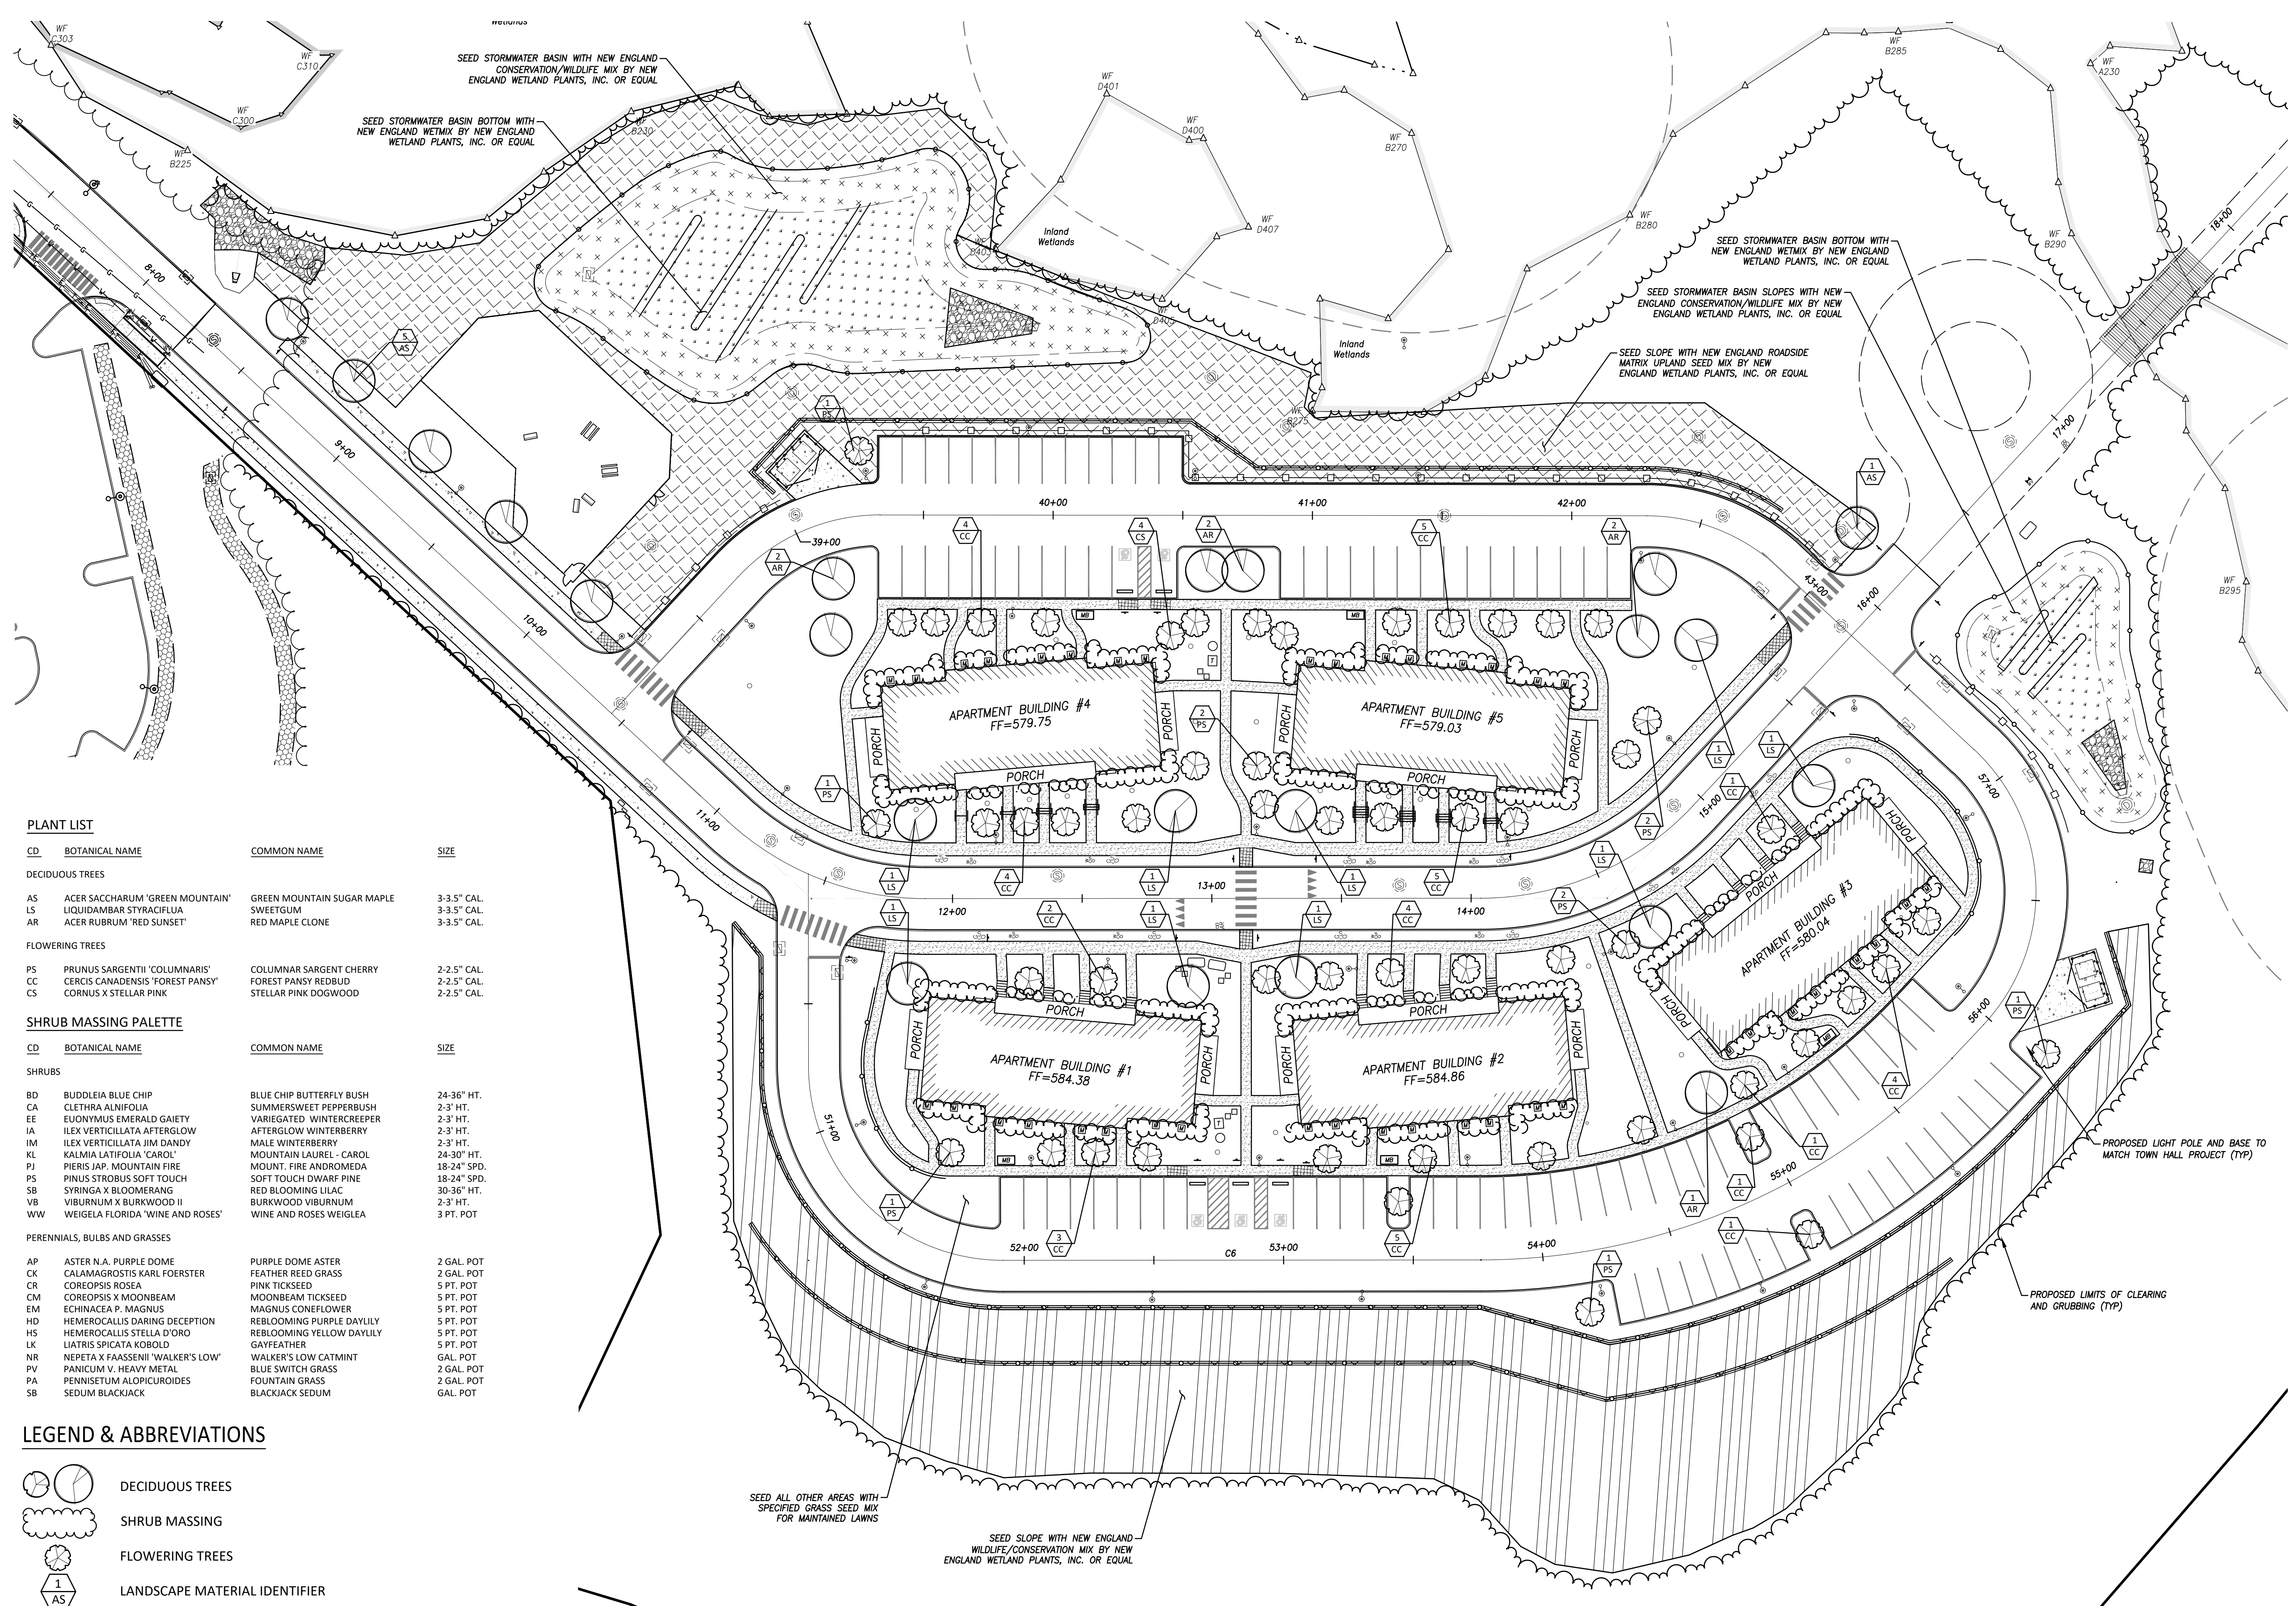

PLANT LIST

CD	BOTANICAL NAME	COMMON NAME	SIZE
DECIDUOUS TREES			
AS	ACER SACCHARUM 'GREEN MOUNTAIN'	GREEN MOUNTAIN SUGAR MAPLE	3-3.5" CAL.
LS	LIQUIDAMBAR STYRACIFLUA	SWEETGUM	3-3.5" CAL.
AR	ACER RUBRUM 'RED SUNSET'	RED MAPLE CLONE	3-3.5" CAL.
FLOWERING TREES			
PS	PRUNUS SARGENTII 'COLUMNARIS'	COLUMNAR SARGENT CHERRY	2-2.5" CAL.
CC	CERCIS CANADENSIS 'FOREST PANSY'	FOREST PANSY REDBUD	2-2.5" CAL.
CS	CORNUS X STELLAR PINK	STELLAR PINK DOGWOOD	2-2.5" CAL.
SHRUB MASSING PALETTE			
CD	BOTANICAL NAME	COMMON NAME	SIZE
SHRUBS			
BD	BUDDLEIA BLUE CHIP	BLUE CHIP BUTTERFLY BUSH	24-36" HT.
CA	CLETHRA ALNIFOLIA	SUMMERSWEET PEPPERBUSH	2-3' HT.
EE	EUONYMUS EMERALD GAITY	VARIEGATED WINTERCREEPER	2-3' HT.
IA	ILEX VERTICILLATA AFTERGLOW	AFTERGLOW WINTERBERRY	2-3' HT.
IM	ILEX VERTICILLATA JIM DANDY	MALE WINTERBERRY	2-3' HT.
KL	KALMIA LATIFOLIA 'CAROL'	MOUNTAIN LAUREL - CAROL	24-30" HT.
PJ	PIERIS JAP. MOUNTAIN FIRE	MOUNT. FIRE ANDROMEDA	18-24" SPD.
PS	PINUS STROBUS SOFT TOUCH	SOFT TOUCH DWARF PINE	18-24" SPD.
SB	SYRINGA X BLOOMERANG	RED BLOOMING LILAC	30-36" HT.
VB	VIBURNUM X BURKWOOD II	BURKWOOD VIBURNUM	2-3' HT.
WW	WEIGELA FLORIDA 'WINE AND ROSES'	WINE AND ROSES WEIGELA	3 PT. POT
PERENNIALS, BULBS AND GRASSES			
AP	ASTER N.A. PURPLE DOME	PURPLE DOME ASTER	2 GAL. POT
CK	CALAMAGROSTIS KARL FOERSTER	FEATHER REED GRASS	2 GAL. POT
CR	COREOPSIS ROSEA	PINK TICKSEED	5 PT. POT
CM	COREOPSIS X MOONBEAM	MOONBEAM TICKSEED	5 PT. POT
EM	ECHINACEA P. MAGNUS	MAGNUS CONEFLOWER	5 PT. POT
HD	HEMEROCALLIS DARING DECEPTION	REBLOOMING PURPLE DAYLILY	5 PT. POT
HS	HEMEROCALLIS STELLA D'ORO	REBLOOMING YELLOW DAYLILY	5 PT. POT
LK	LIATRIS SPICATA KOBOLD	GAYFEATHER	5 PT. POT
NR	NEPETA X FASSENI 'WALKER'S LOW'	WALKER'S LOW CATMINT	GAL. POT
PA	PANICUM V. HEAVY METAL	BLUE SWITCH GRASS	2 GAL. POT
PA	PENNISETUM ALOPICUROIDES	FOUNTAIN GRASS	2 GAL. POT
SB	SEDUM BLACKJACK	BLACKJACK SEDUM	GAL. POT

LEGEND & ABBREVIATIONS

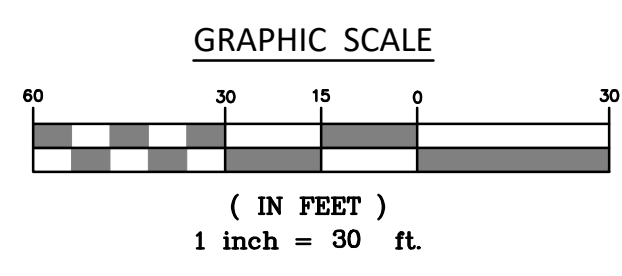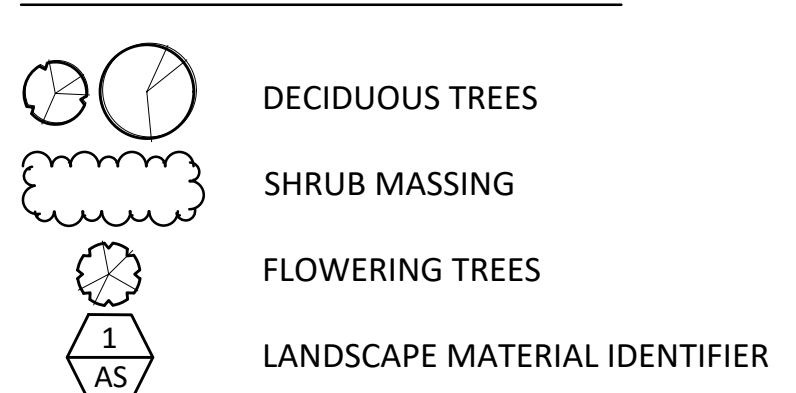


NOT FOR CONSTRUCTION
 1/29/2021


PLAN NOTES

- SEE COVER SHEET FOR ENGINEER AND SURVEYOR SIGNATURES AND SEALS.
- SEE SHEET 2 FOR LEGEND & ABBREVIATIONS.

P:\CIVIL 3D PROJECTS\2020\20-2853 EDGEGWATER-APARTMENTS\DWG\DESIGN\3 APARTMENT SITE PLAN.DWG

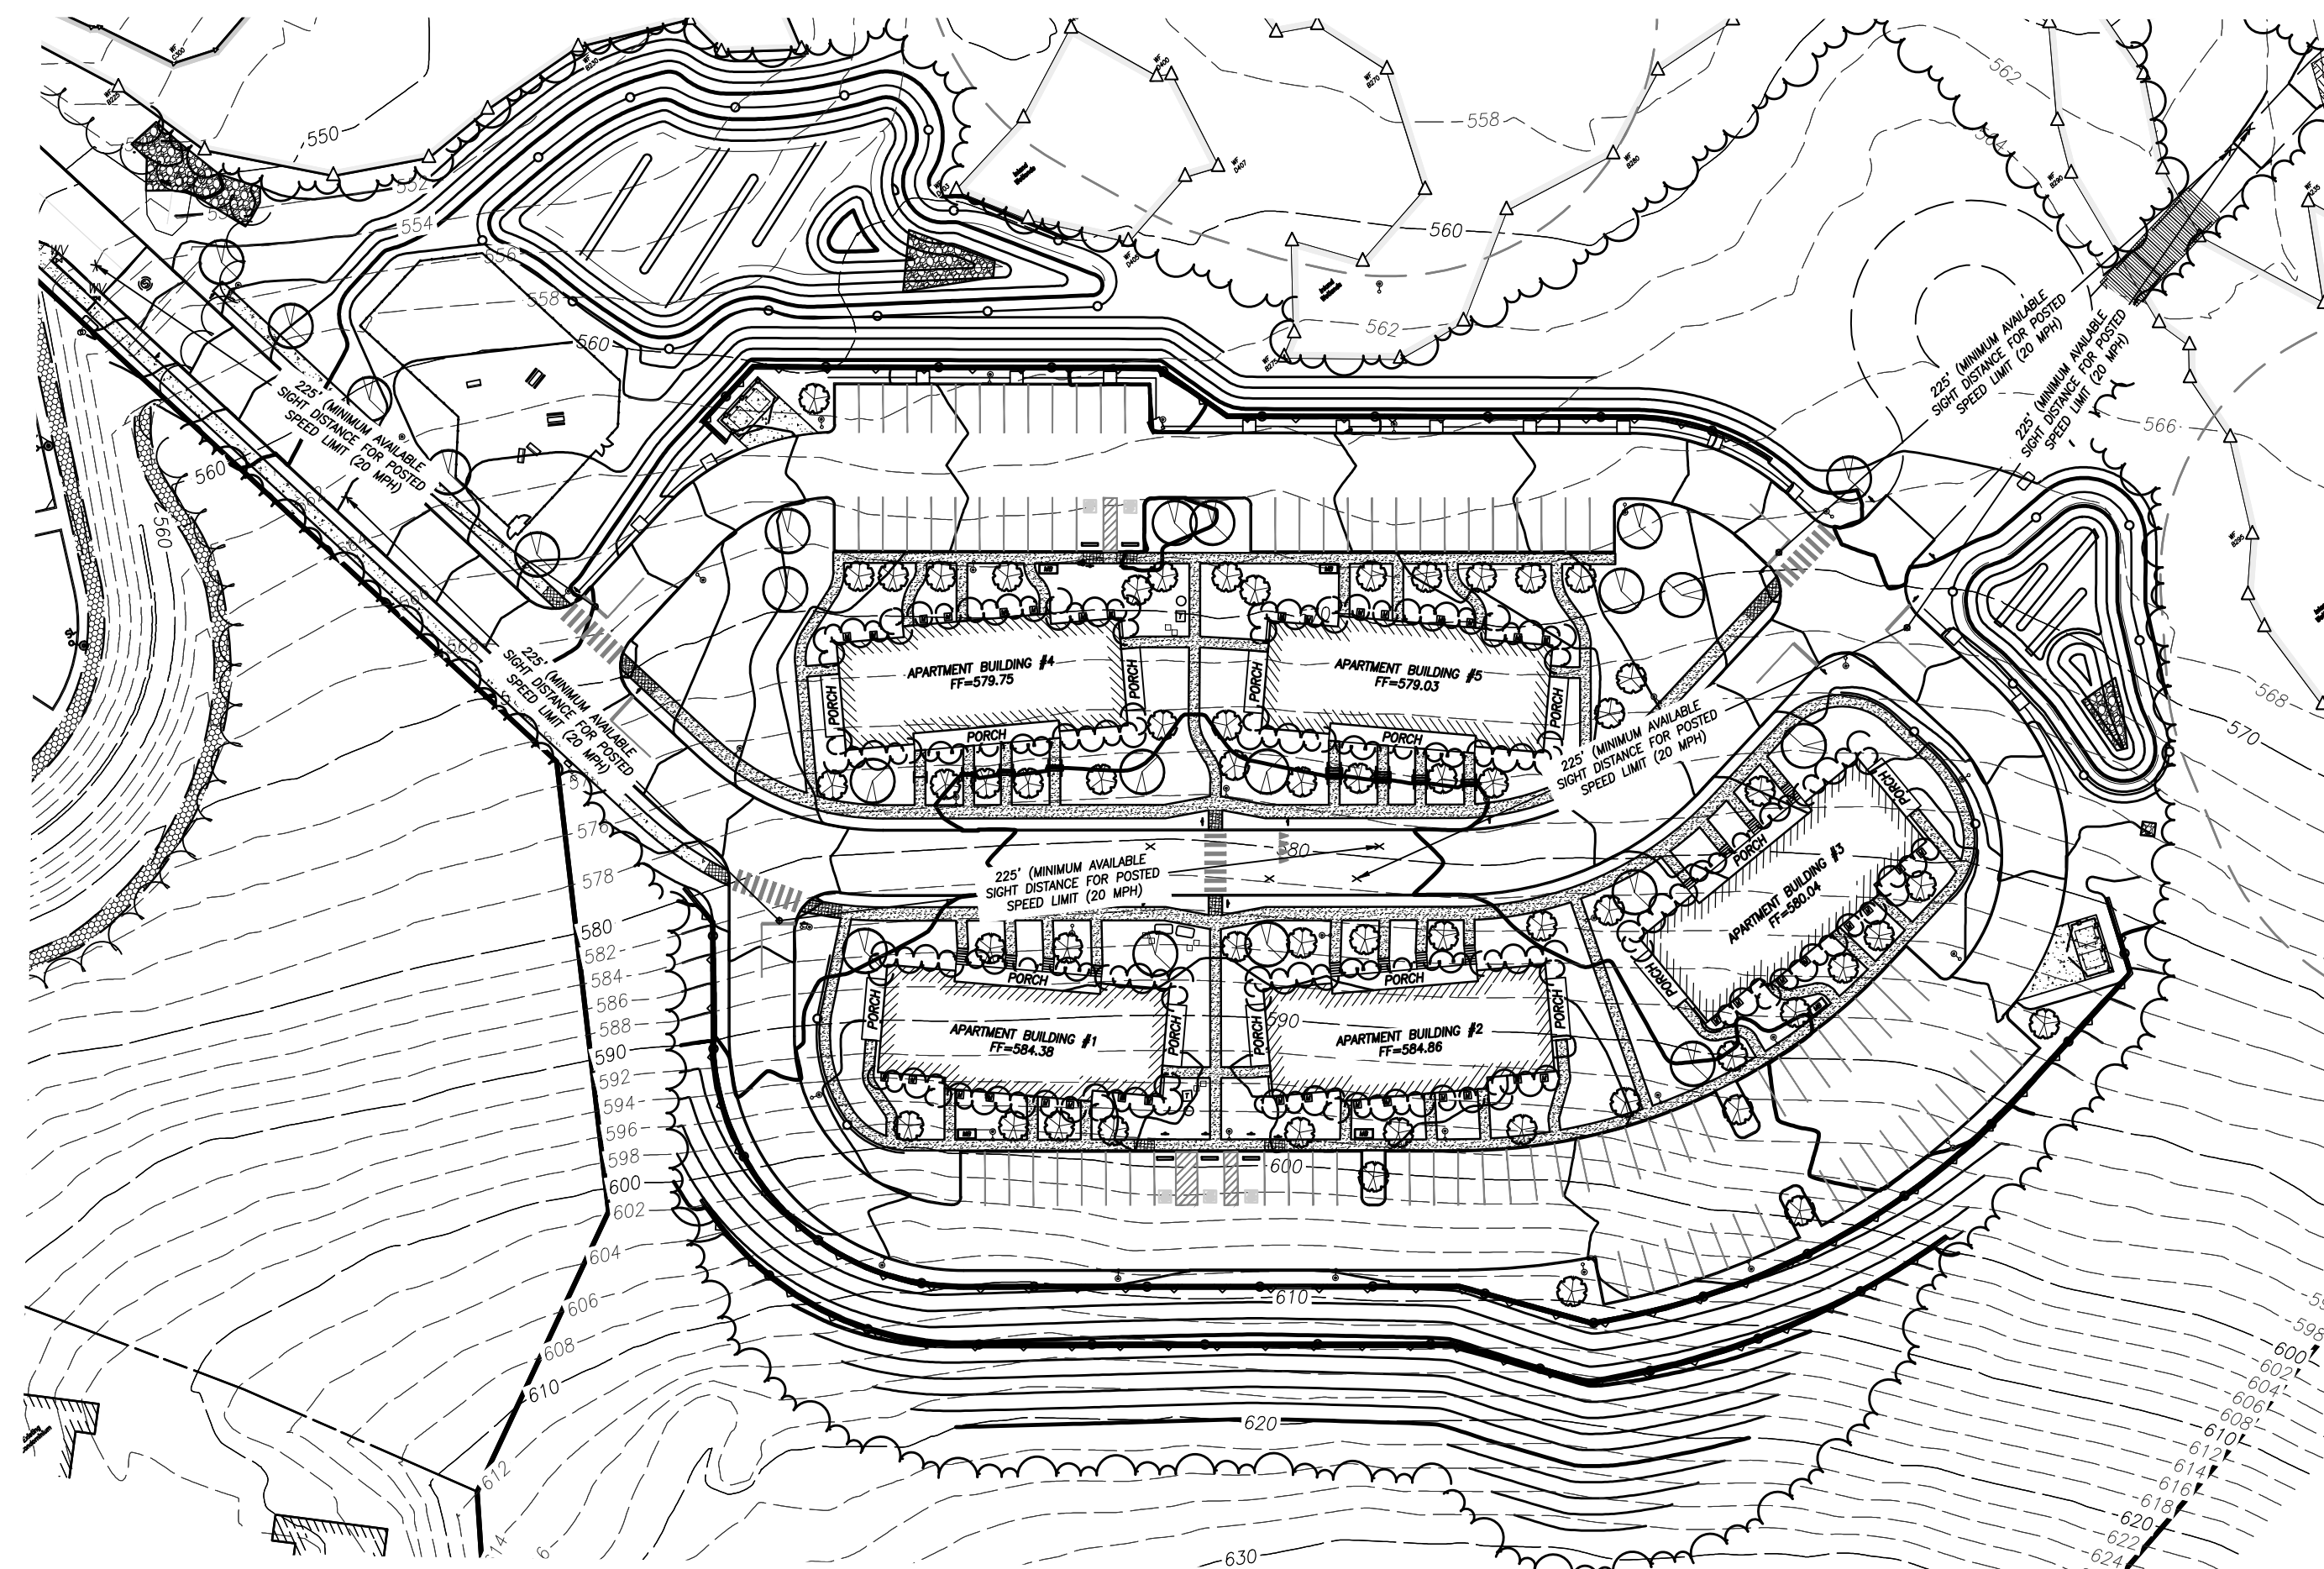


Sight Line Location Plans
Horizontal Scale: 1"=60'

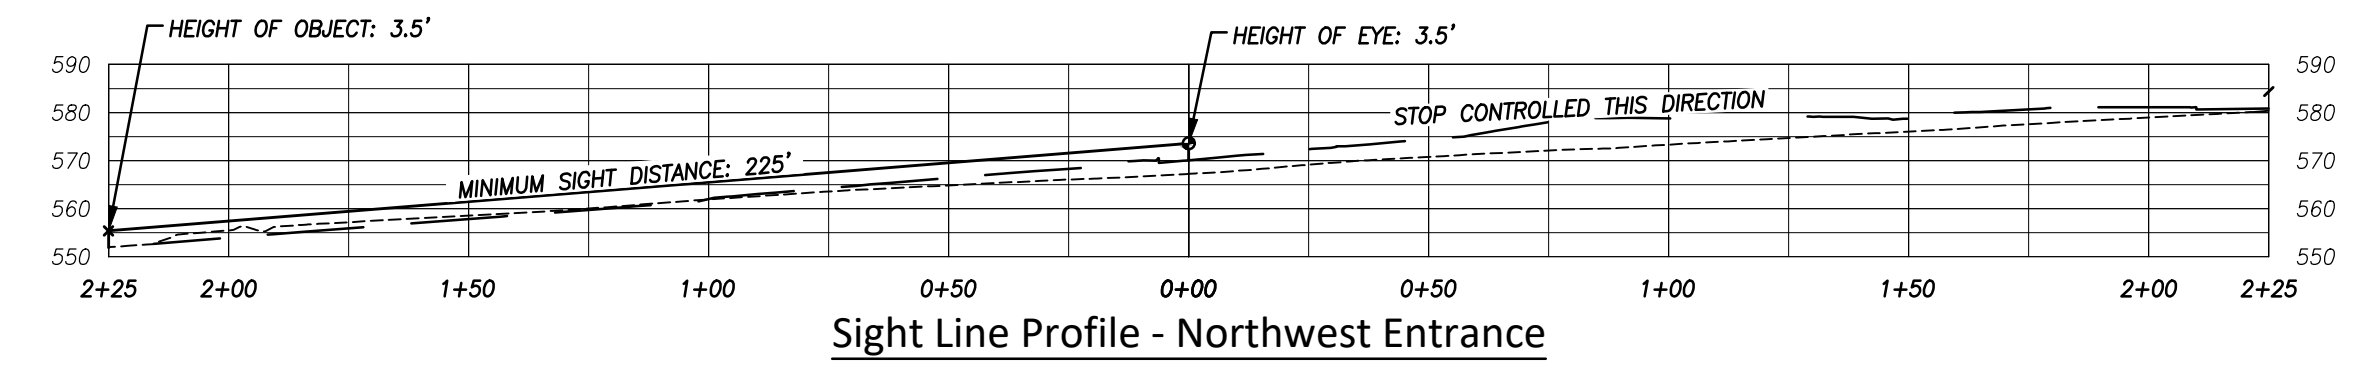


Sight Line Profile - Northwest Entrance

Horizontal Scale: 1"=40'
Vertical Scale: 1"=40'

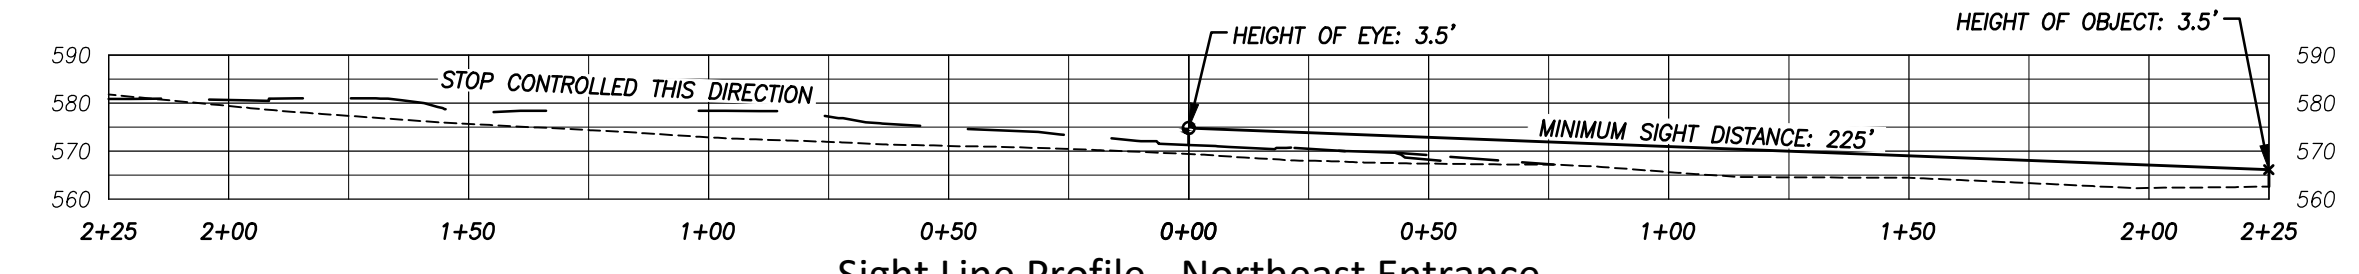


Sight Line Profile - Northeast Entrance

Horizontal Scale: 1"=40'
Vertical Scale: 1"=40'

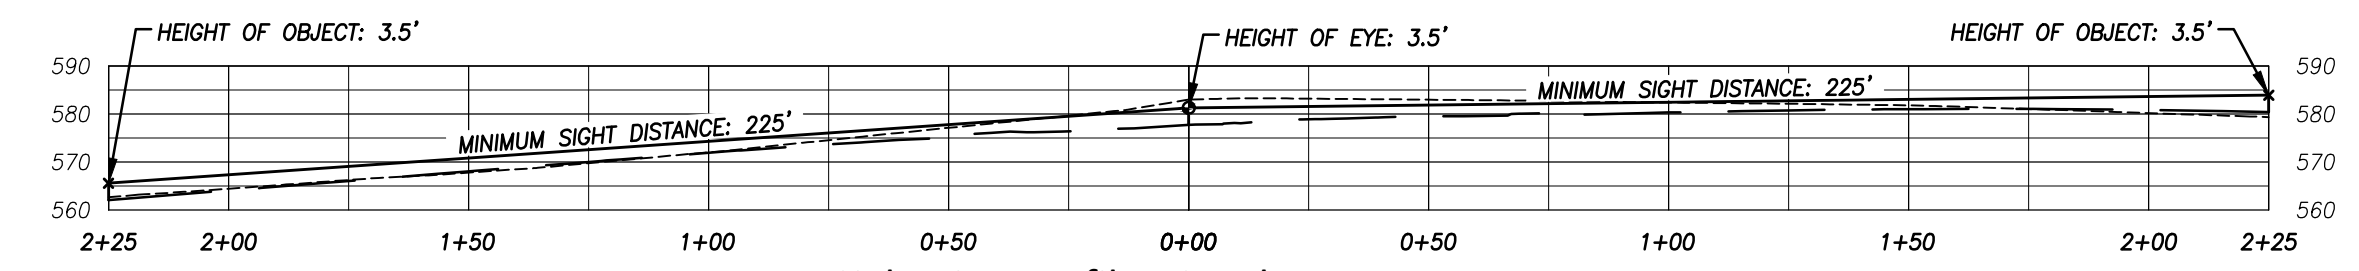


Sight Line Profile - Southwest Entrance

Horizontal Scale: 1"=40'
Vertical Scale: 1"=40'

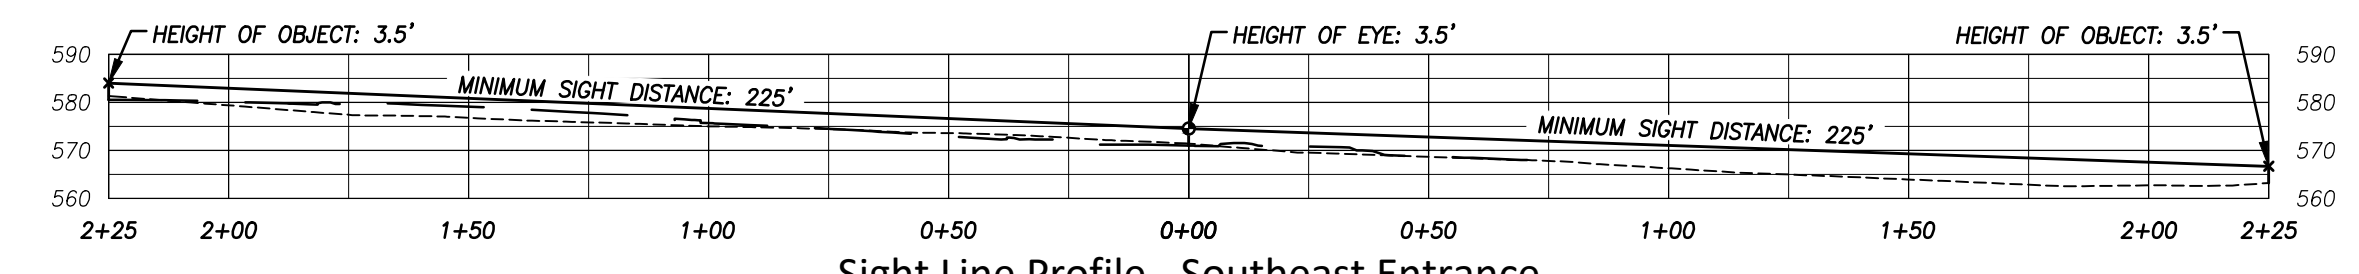

Sight Line Profile - Southeast Entrance

Horizontal Scale: 1"=40'
Vertical Scale: 1"=40'



SCALE:	As Noted
DATE:	December 2020
JOB I.D. NO.	20-2853
Revisions	
Rev. A -	IWWC Comments & Stormwater Quality - 1/18/21
Rev. B -	Per IWWC Conditions of Approval - 1/29/21

SHEET NO.





14

25

PLAN NOTES

- SEE COVER SHEET FOR ENGINEER AND SURVEYOR SIGNATURES AND SEALS.
- SEE SHEET 2 FOR LEGEND & ABBREVIATIONS.


P:\CIVIL 3D PROJECTS\2020\20-2853 EDgewater-APARTMENTS\DWG\DESIGN\3 APARTMENT SITE PLAN.DWG

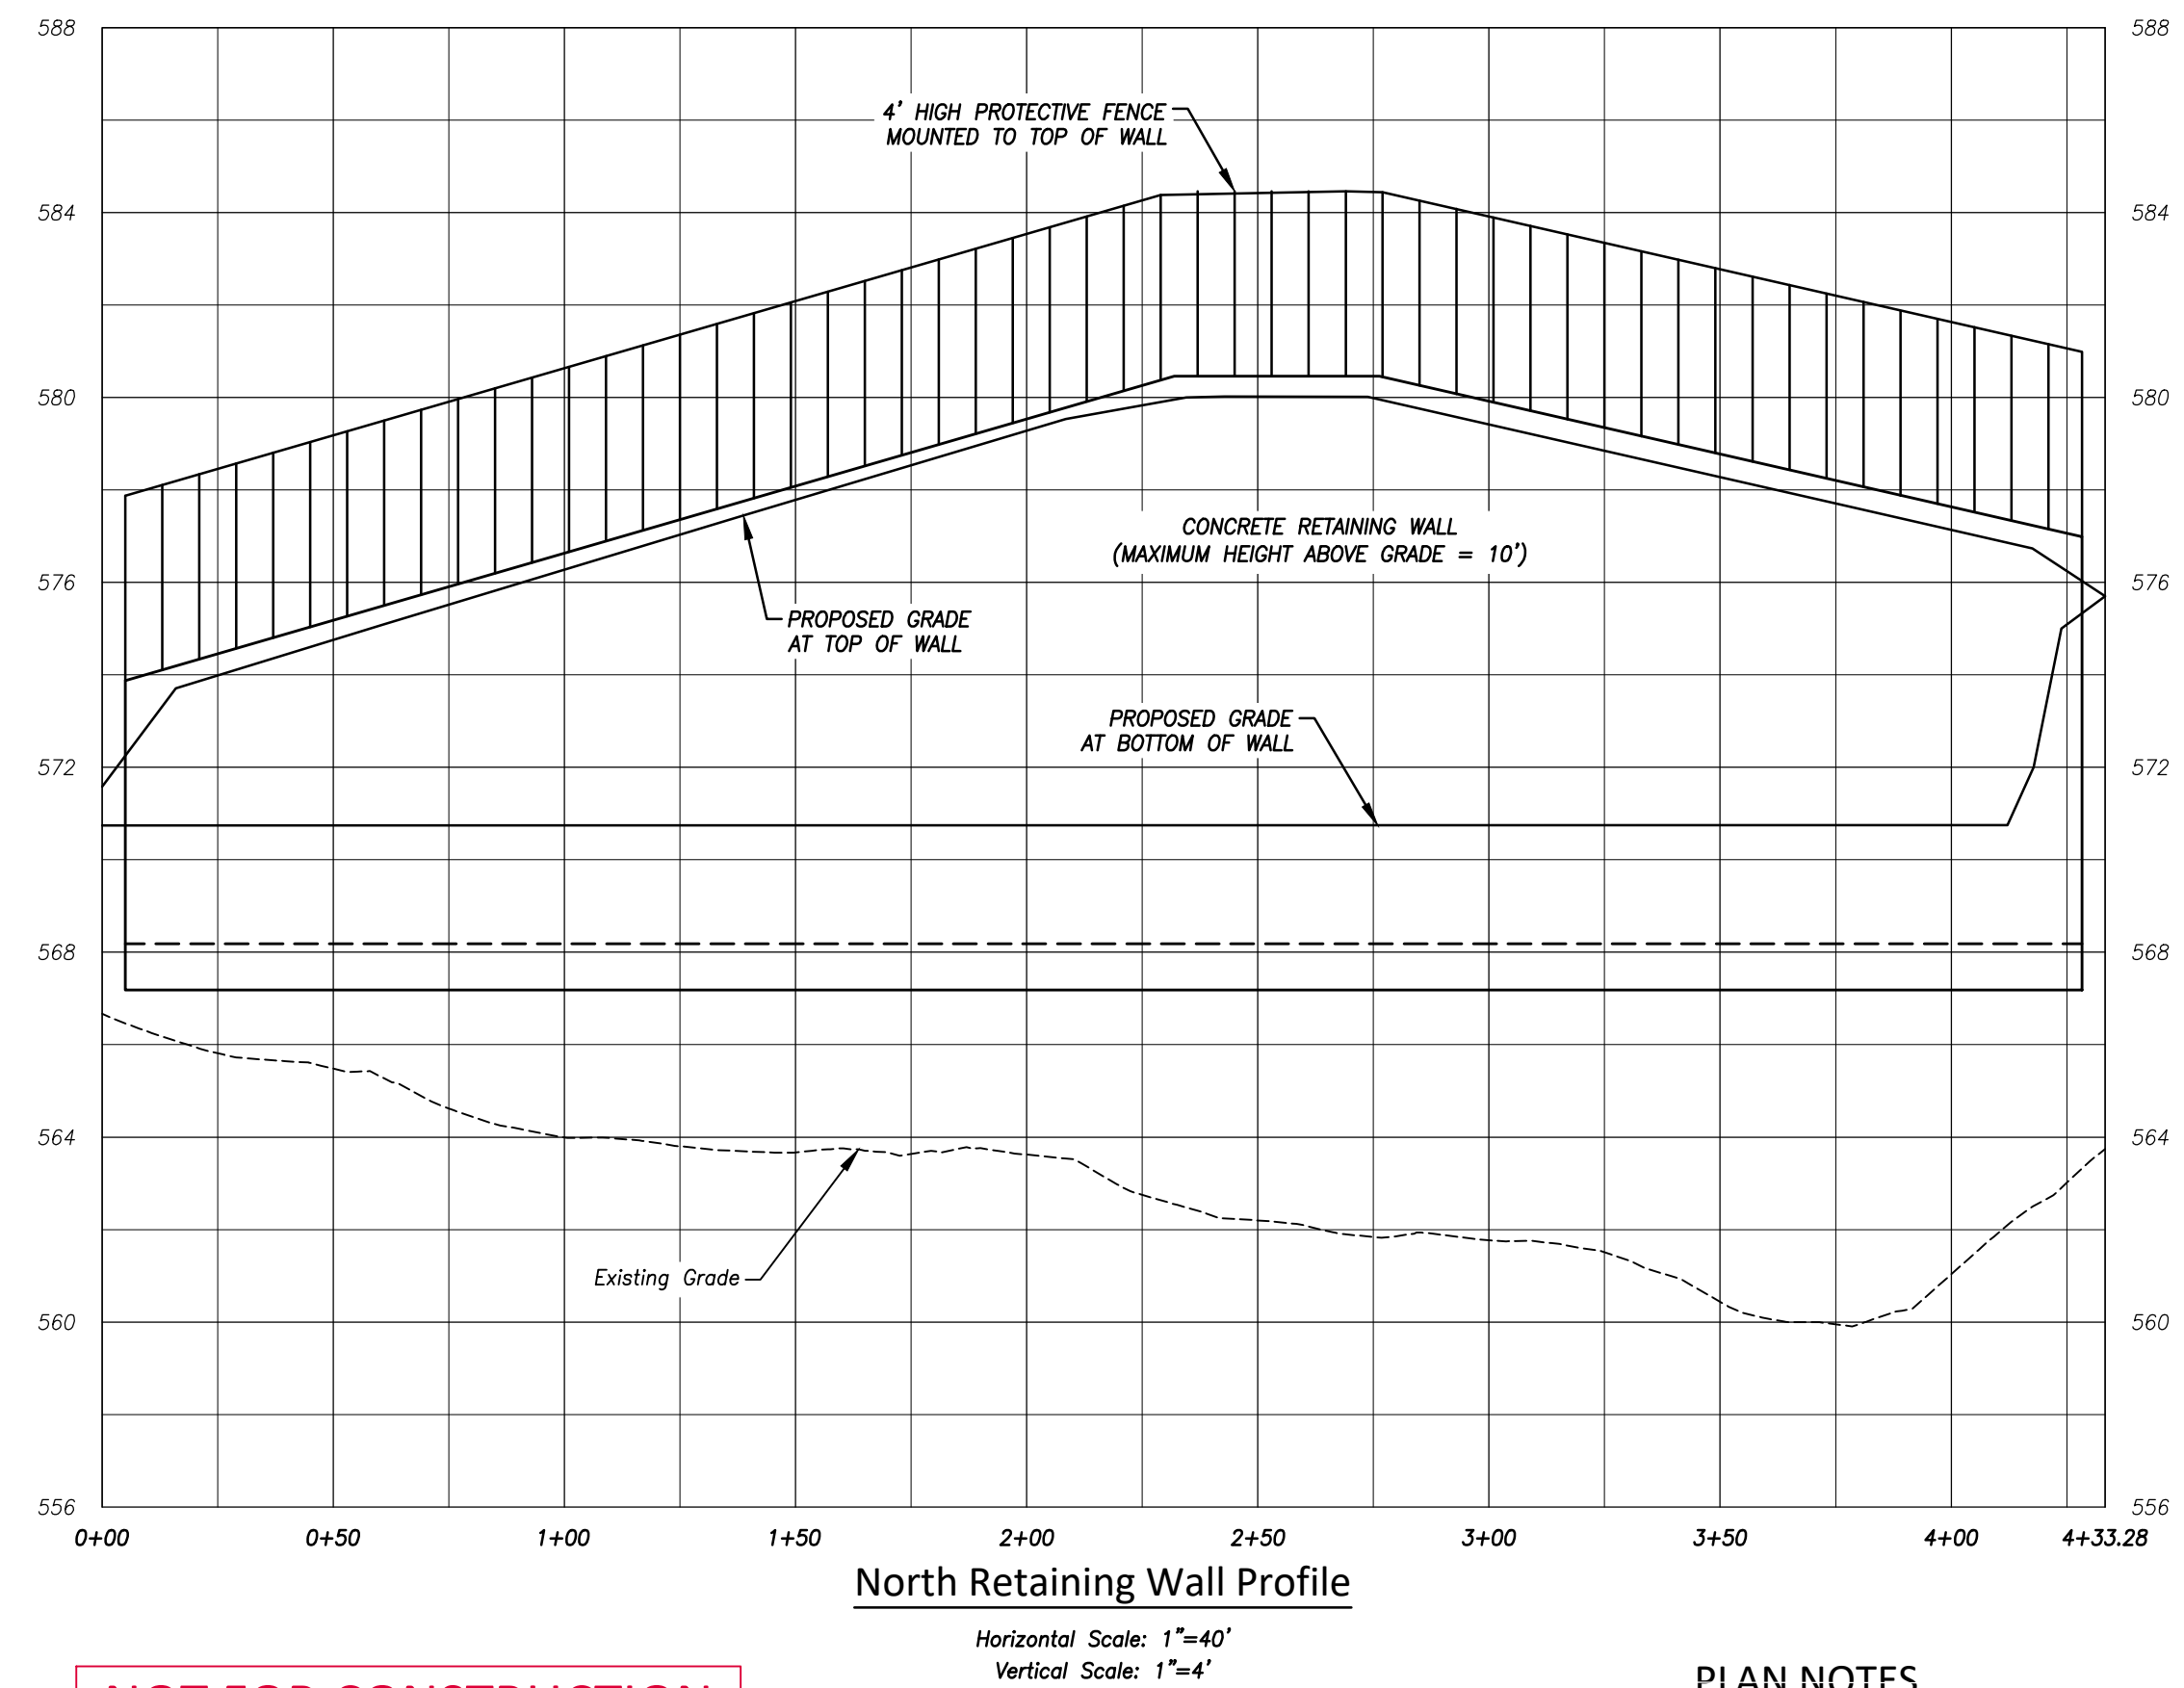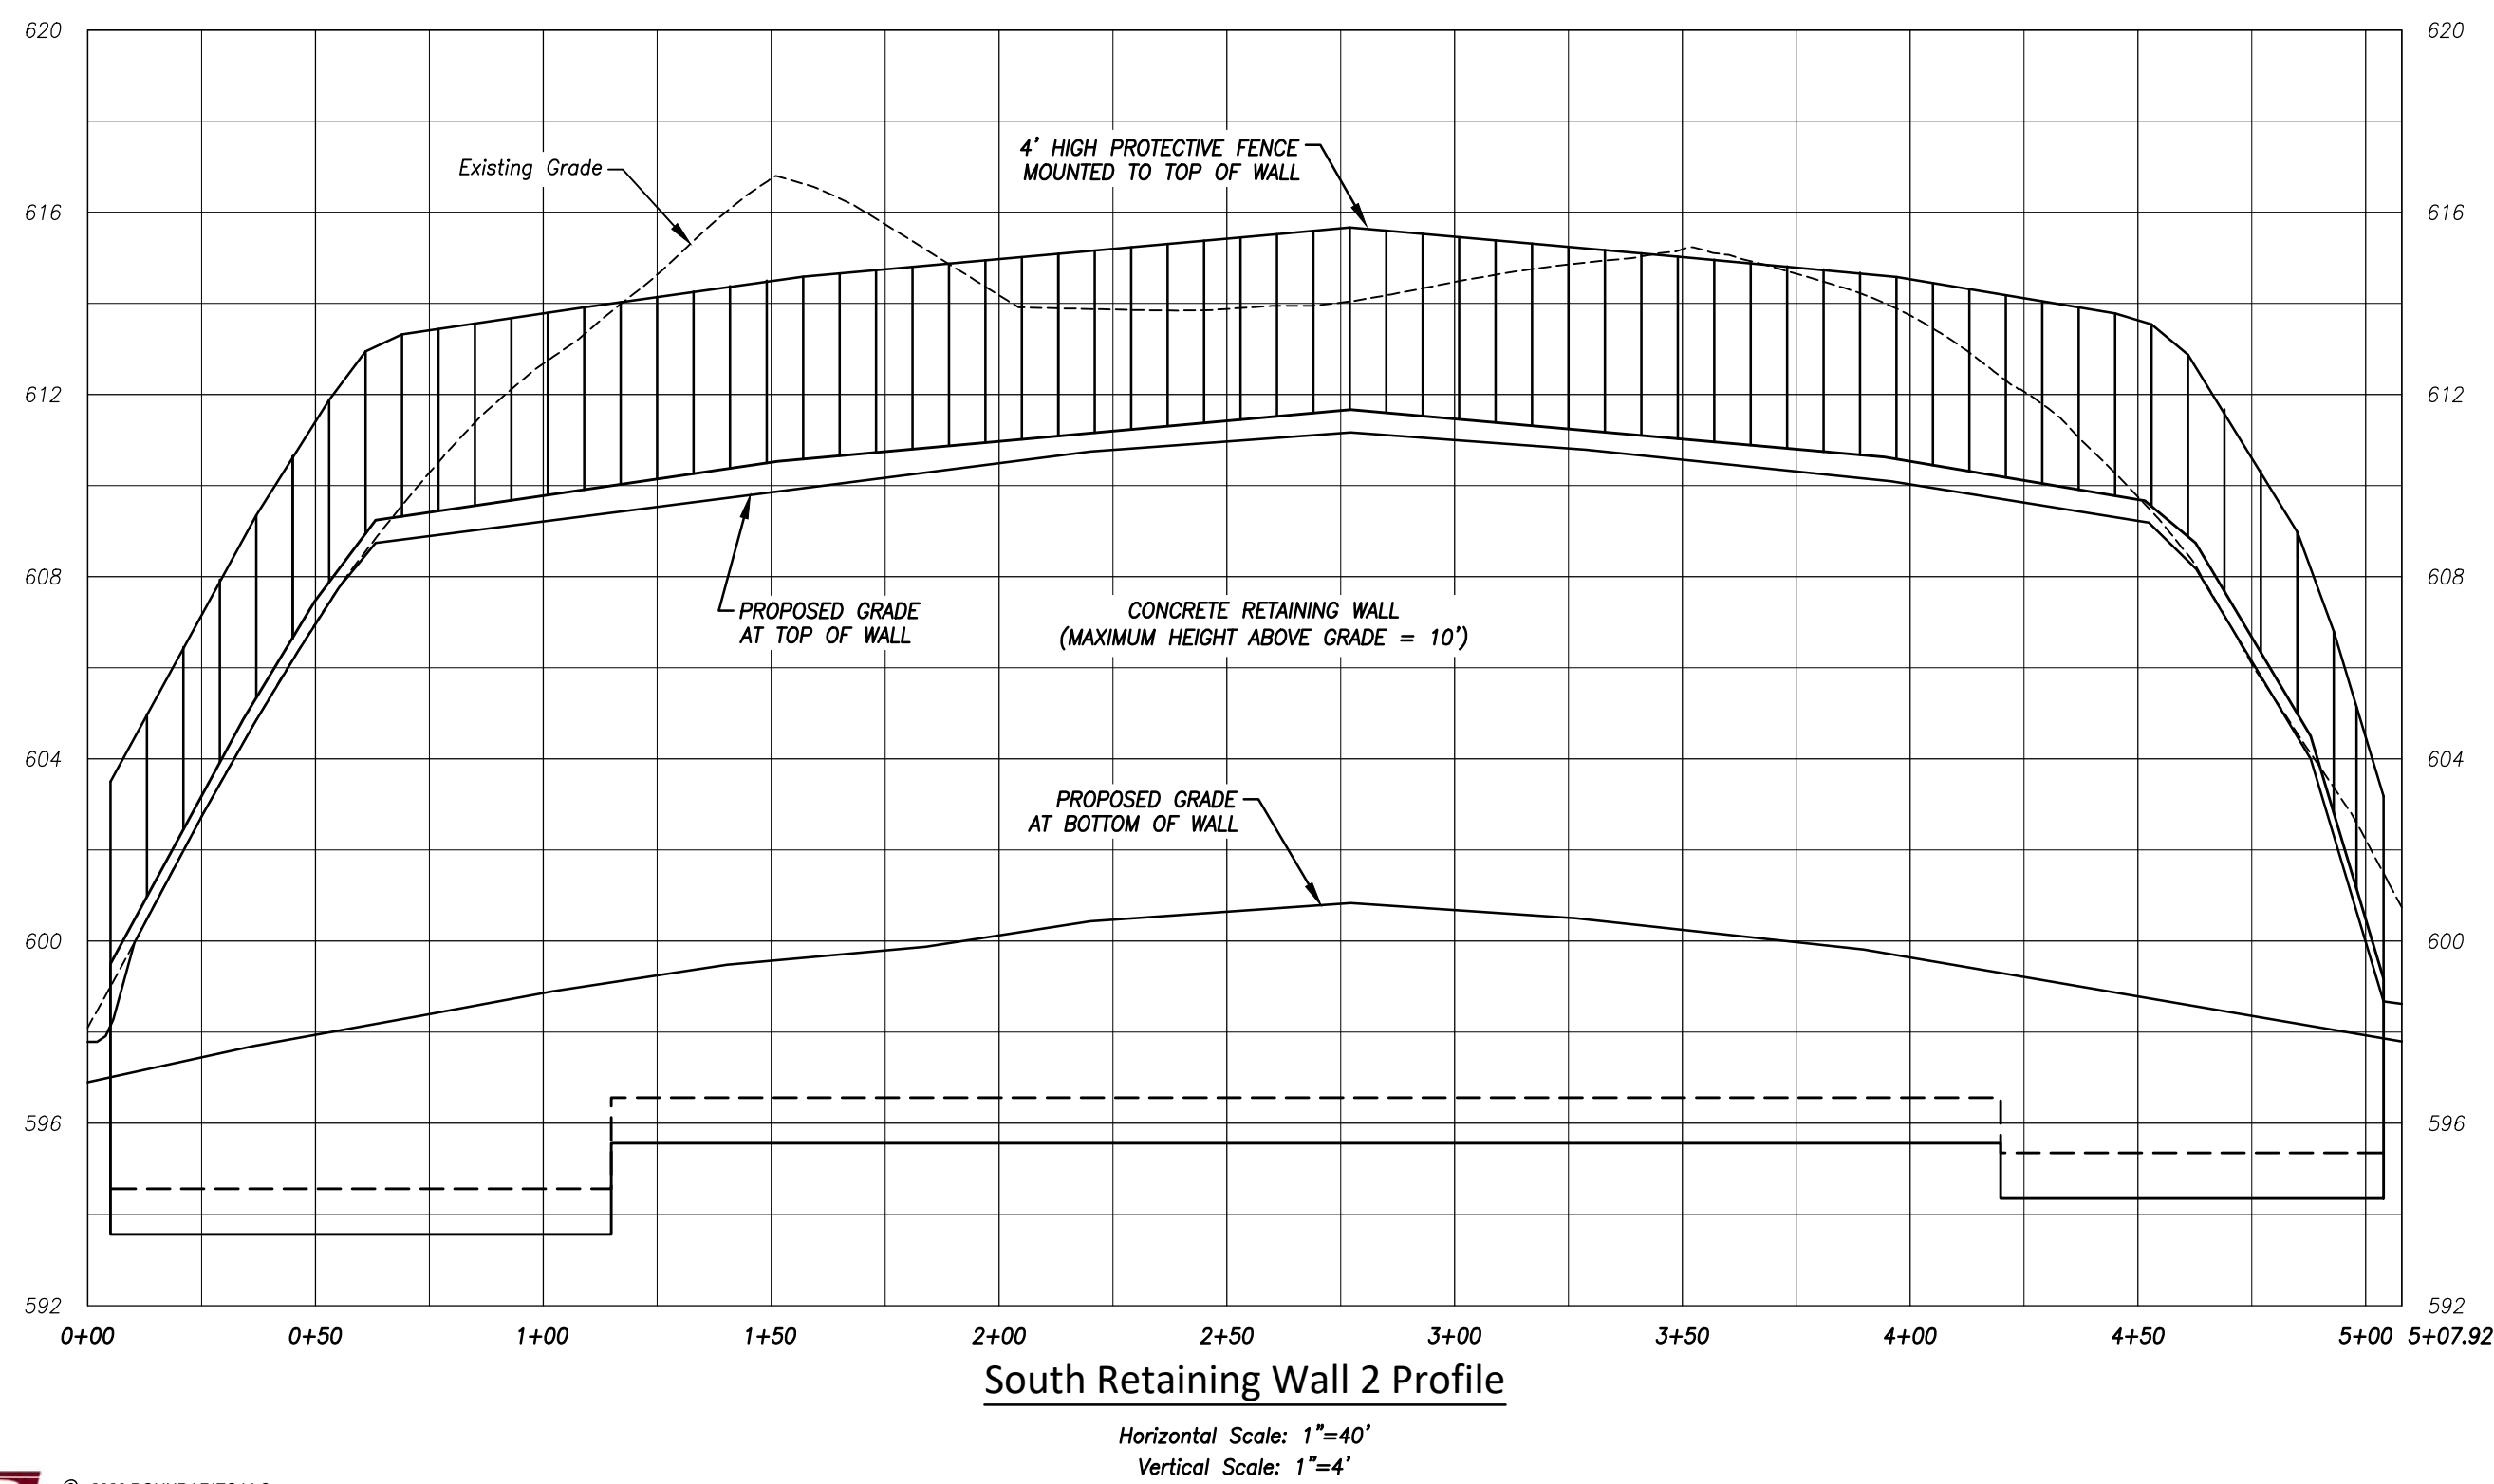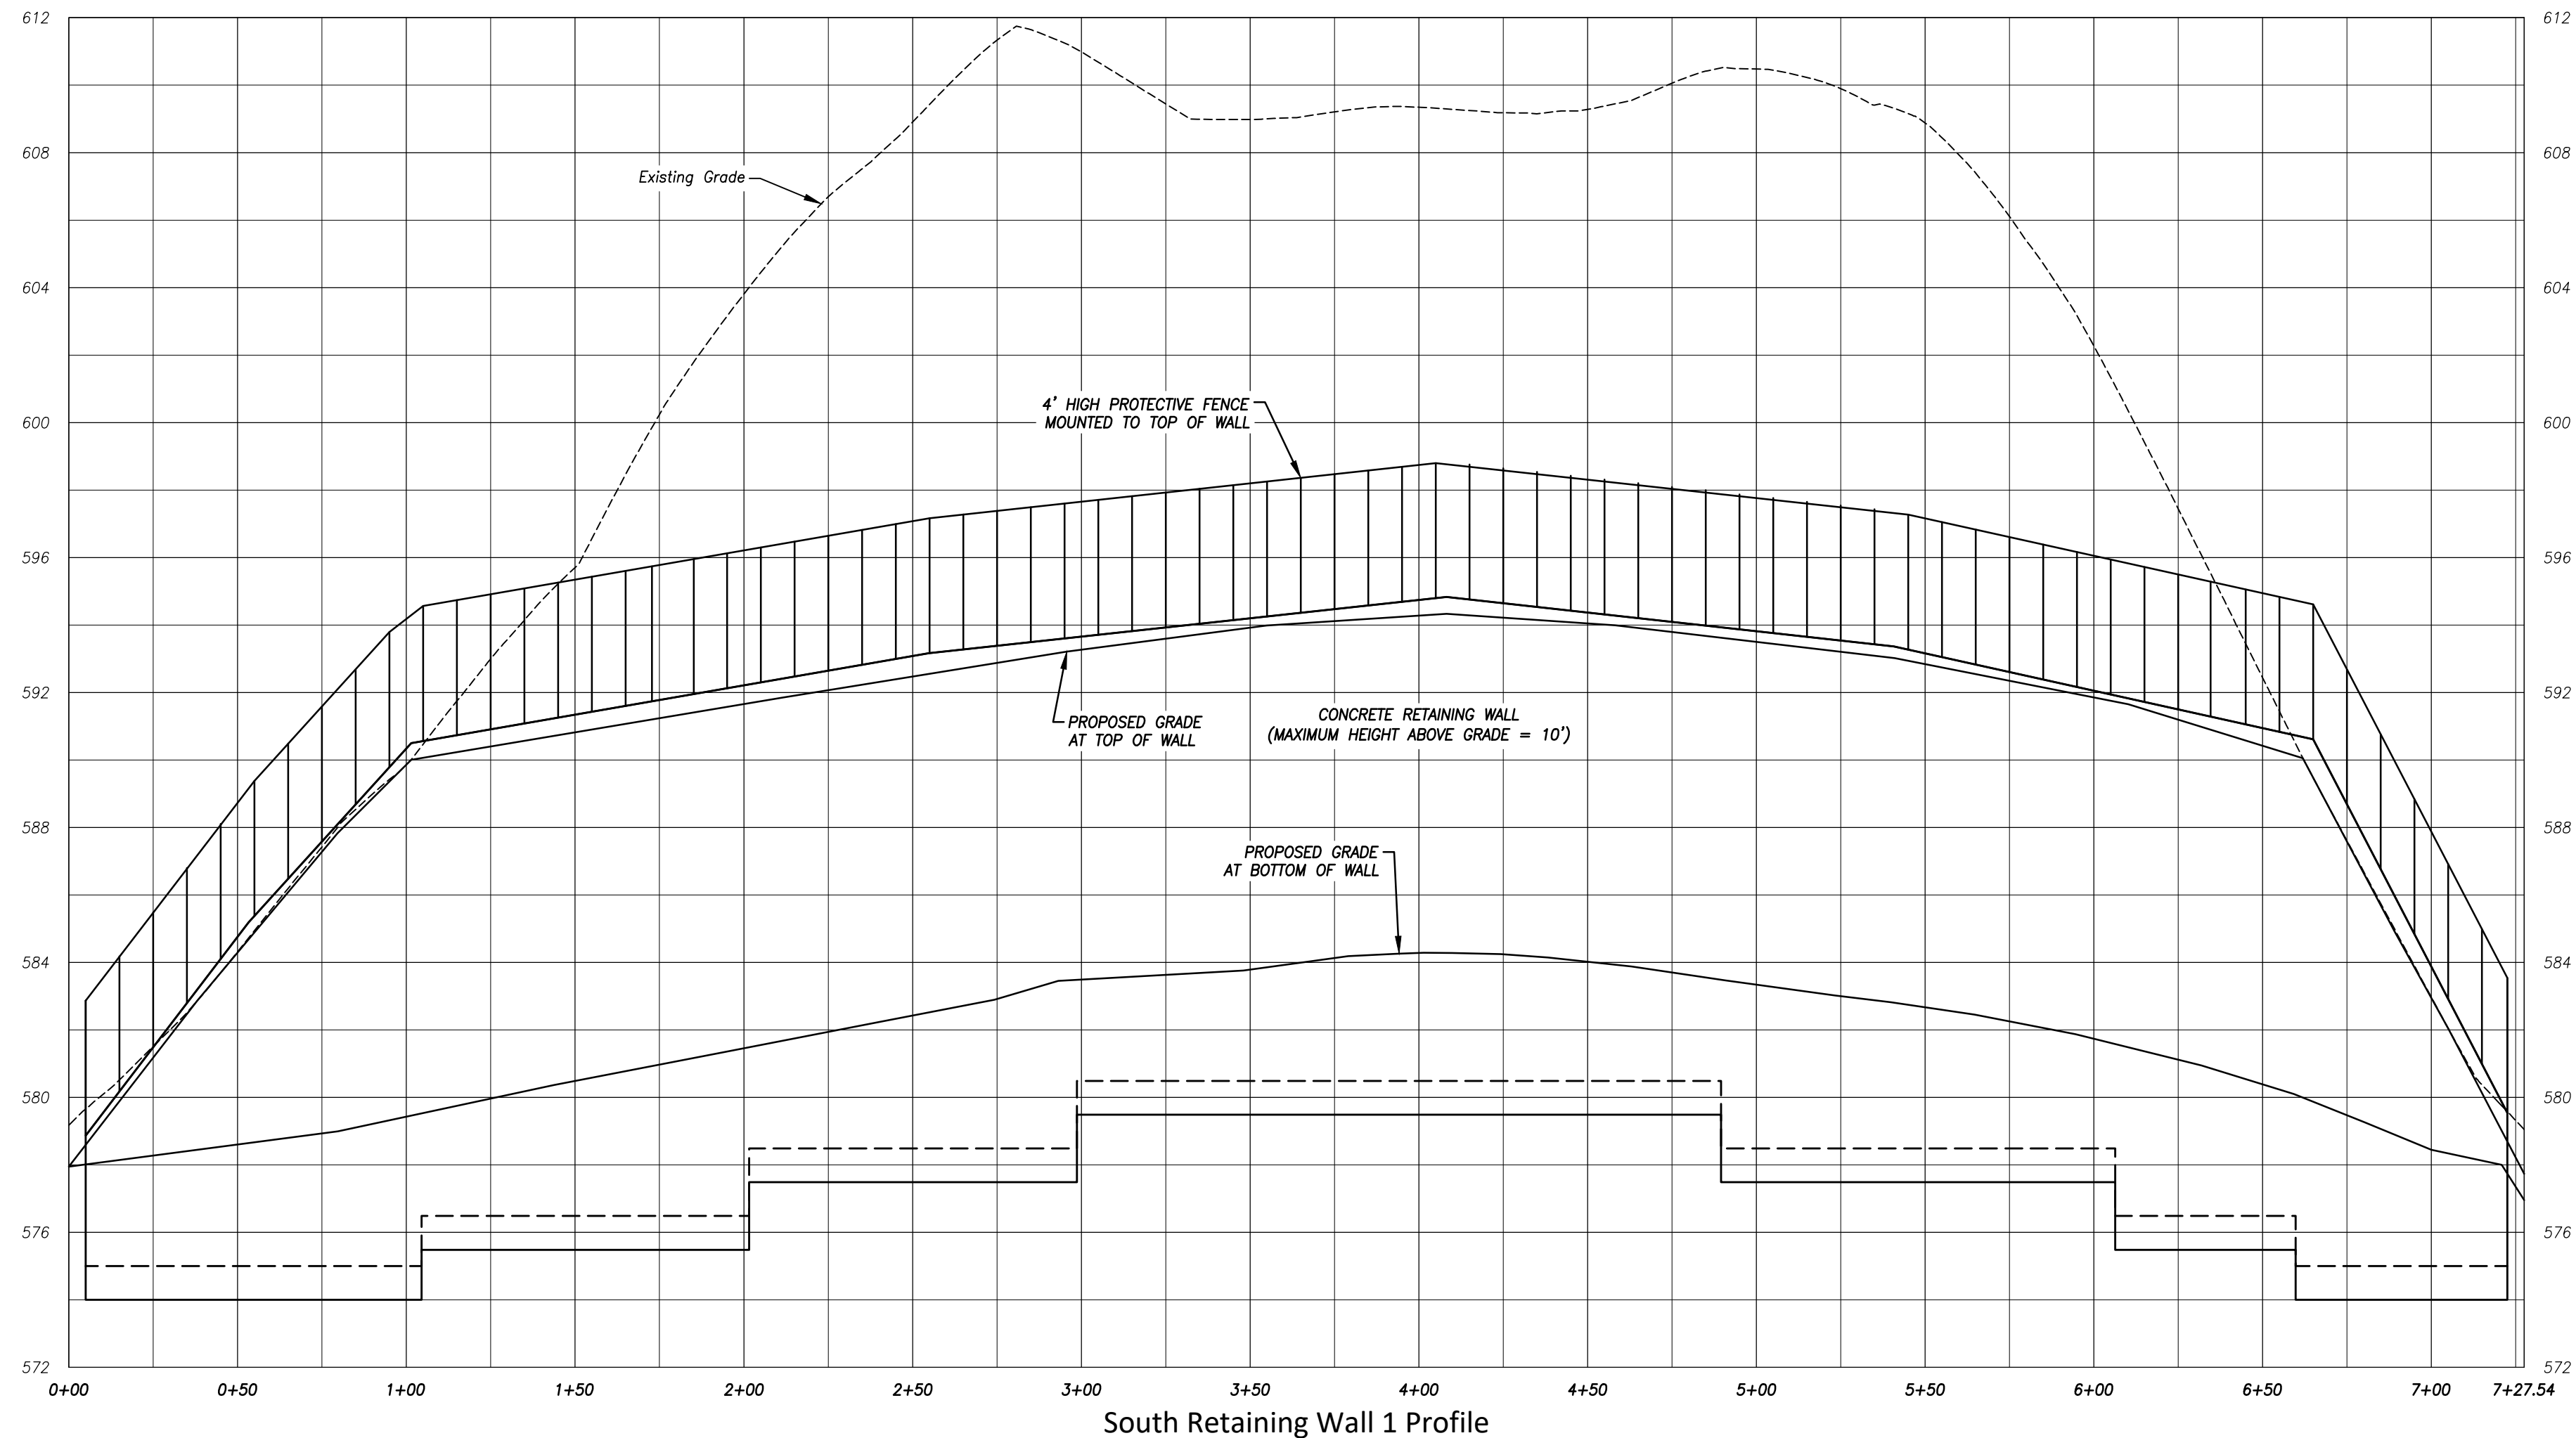

NOT FOR CONSTRUCTION
1/29/2021

PLAN NOTES

- SEE COVER SHEET FOR ENGINEER AND SURVEYOR SIGNATURES AND SEALS.
- SEE SHEET 2 FOR LEGEND & ABBREVIATIONS.




SCALE:	As Noted
DATE:	December 2020
JOB I.D. NO.:	20-2853
Revisions	
Rev. A -	IWWC Comments & Stormwater Quality - 1/18/21
Rev. B -	Per IWWC Conditions of Approval - 1/29/21

SHEET NO.

15

25



SCALE: 1" = 30'

DATE: December 2020

JOB I.D. NO.: 20-2853

Revisions


Rev. A - IWWC Comments & Stormwater Quality - 1/18/21

Rev. B - Per IWWC Conditions of Approval - 1/29/21

SHEET NO.


16

25

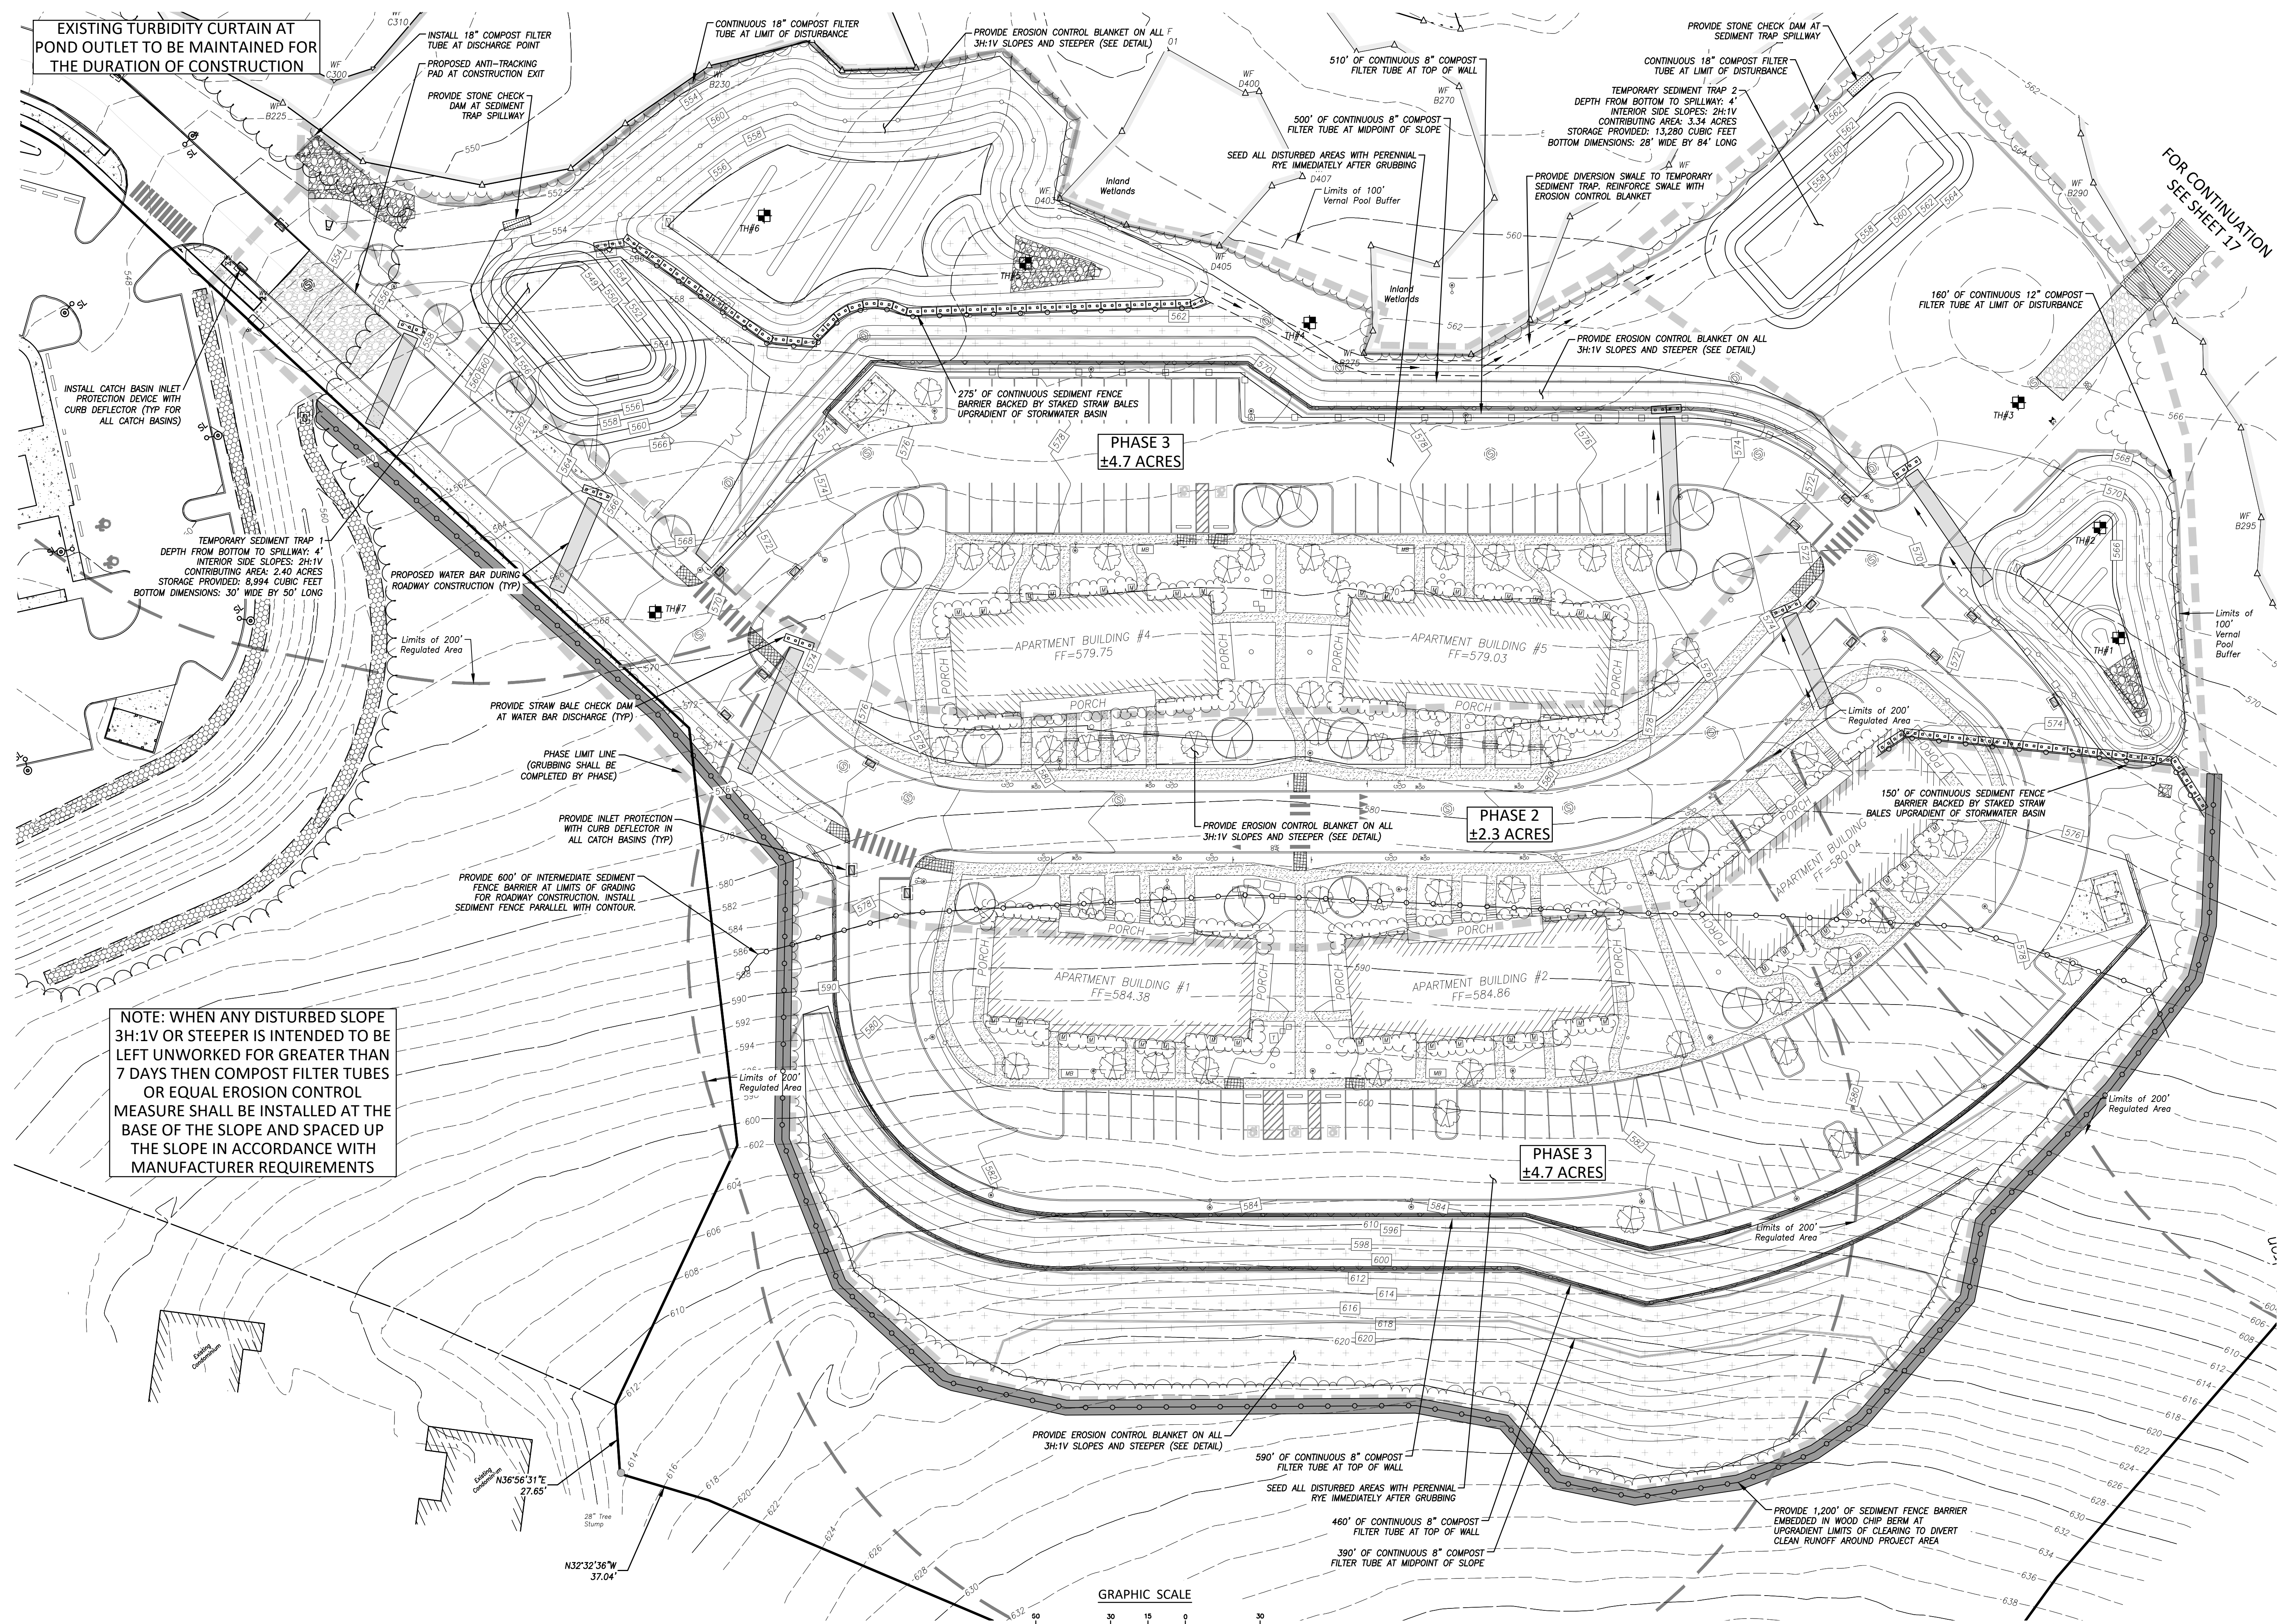

EXISTING TURBIDITY CURTAIN AT POND OUTLET TO BE MAINTAINED FOR THE DURATION OF CONSTRUCTION

NOTE: WHEN ANY DISTURBED SLOPE 3H:1V OR STEEPER IS INTENDED TO BE LEFT UNWORKED FOR GREATER THAN 7 DAYS THEN COMPOST FILTER TUBES OR EQUAL EROSION CONTROL MEASURE SHALL BE INSTALLED AT THE BASE OF THE SLOPE AND SPACED UP THE SLOPE IN ACCORDANCE WITH MANUFACTURER REQUIREMENTS



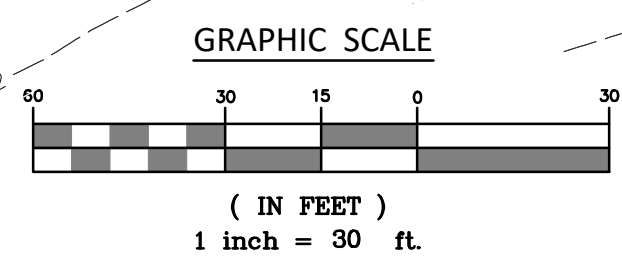


NOT FOR CONSTRUCTION
 1/29/2021

PLAN NOTES
 1. SEE COVER SHEET FOR ENGINEER AND SURVEYOR SIGNATURES AND SEALS.
 2. SEE SHEET 2 FOR LEGEND & ABBREVIATIONS.

P:\CIVIL 3D PROJECTS\2020\20-2853 EDGEWATER-APARTMENTS\DWG\DESIGN\3 APARTMENT SITE PLAN.DWG


FOR CONTINUATION
SEE SHEET 16

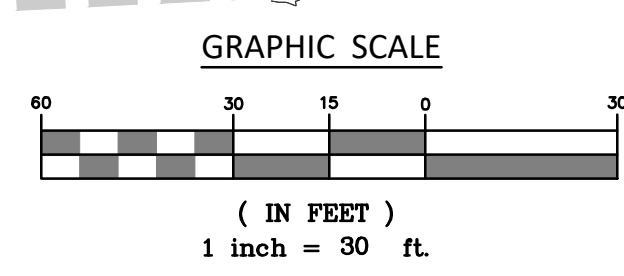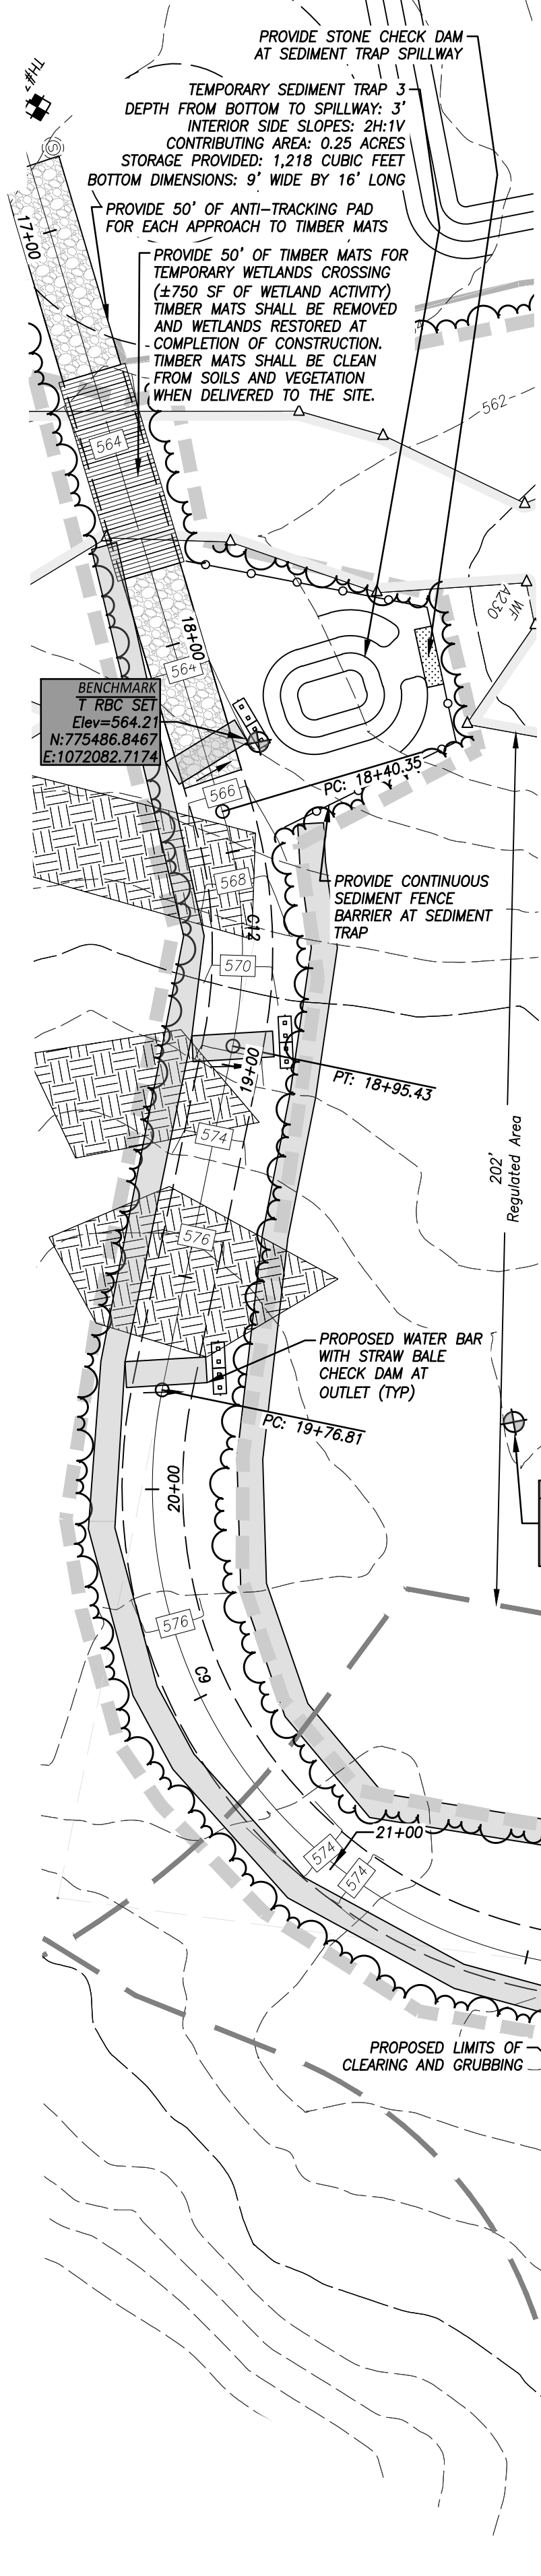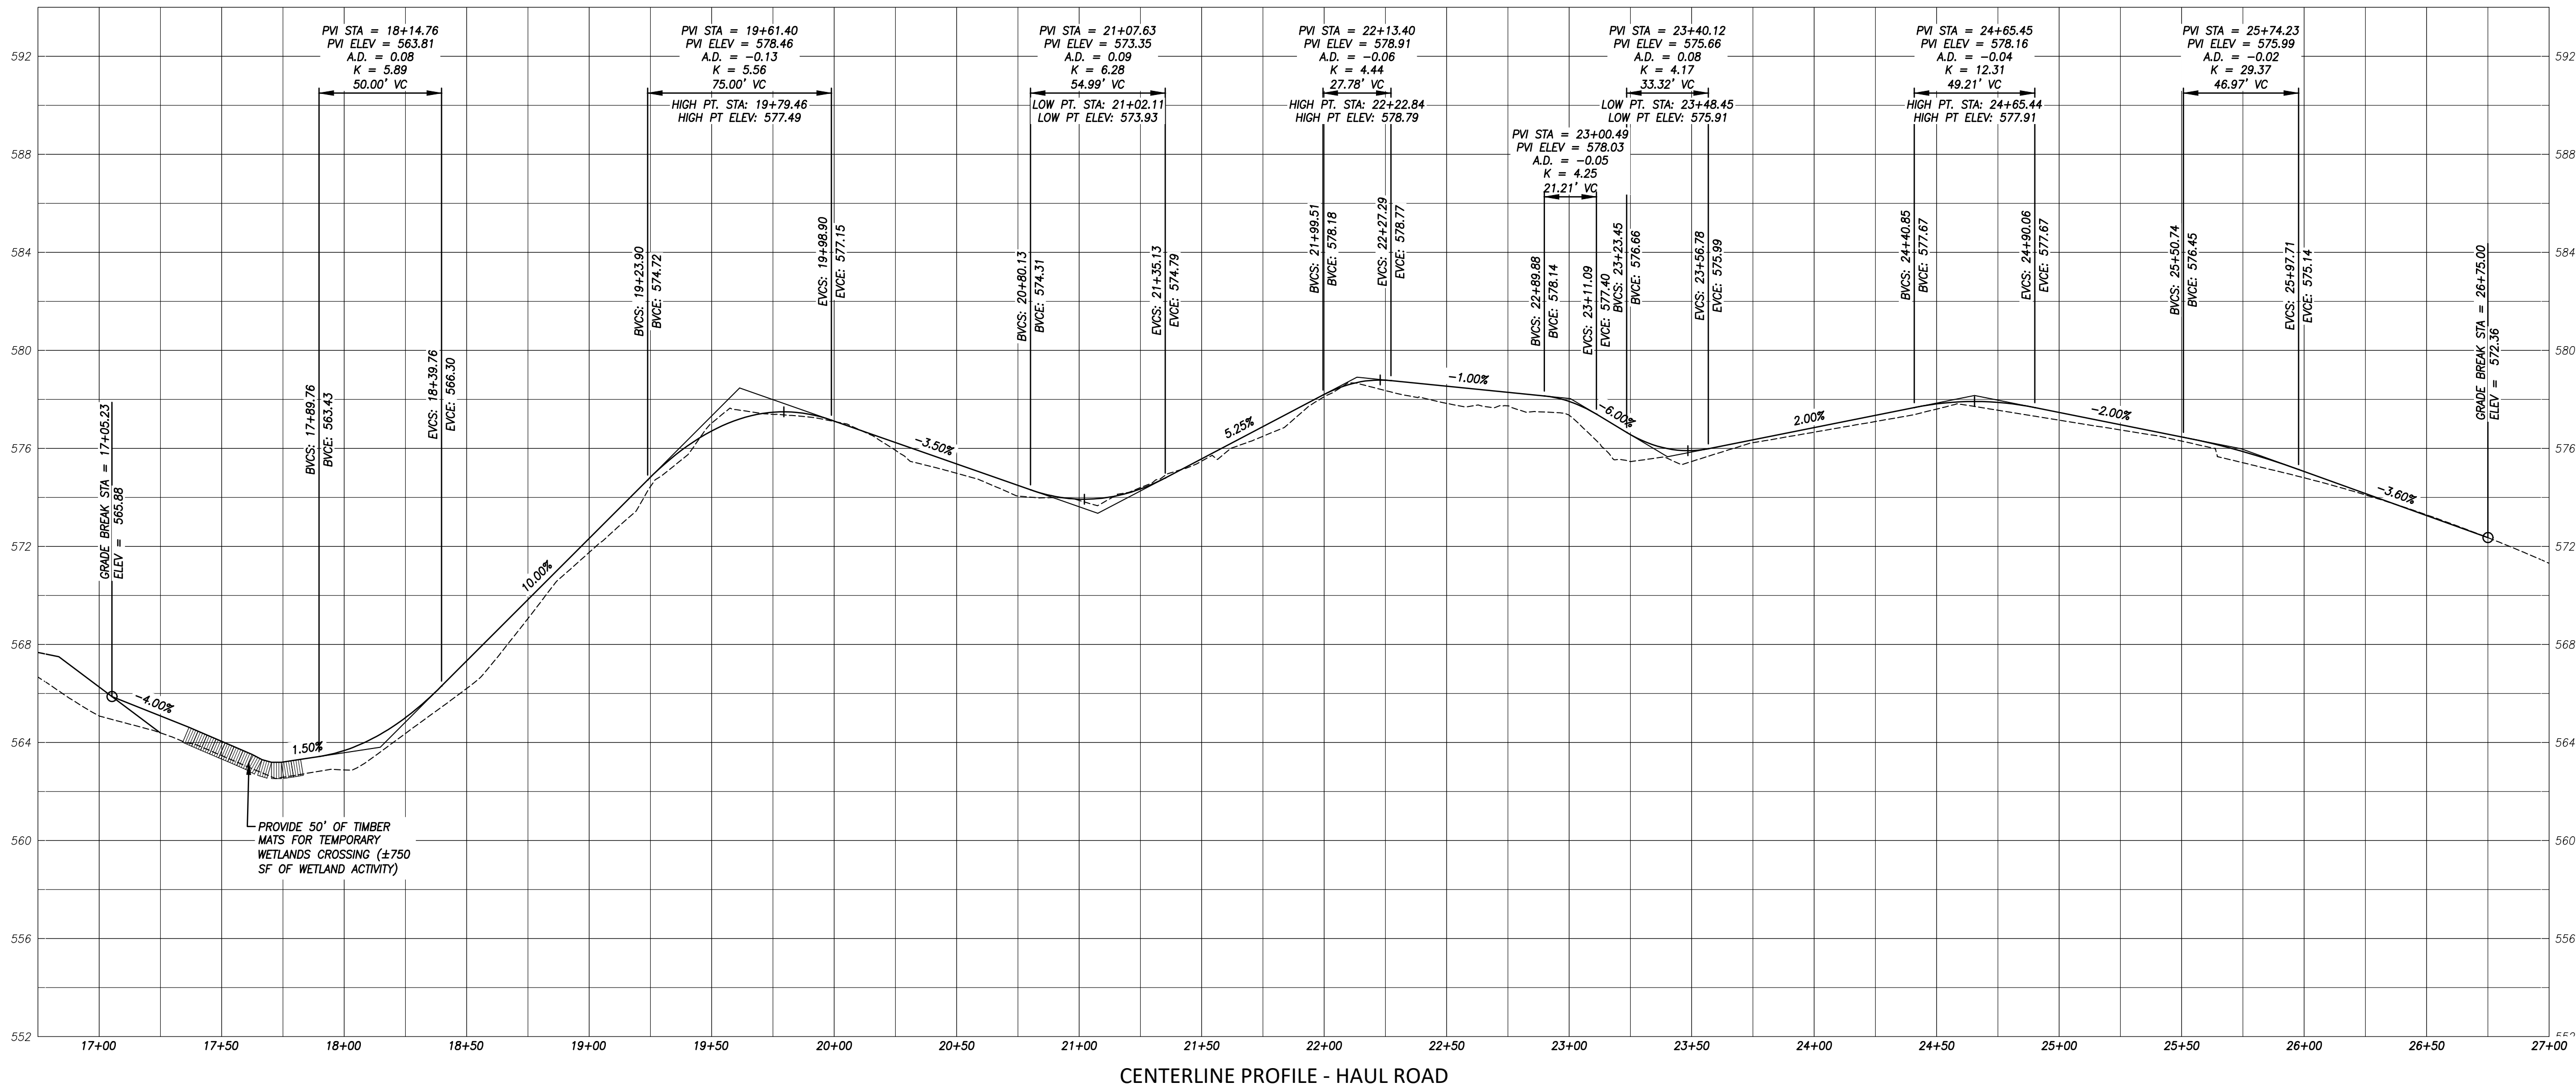

Curve Table: Alignments					
Curve #	Radius	Length	Chord Direction	Start Point	End Point
C9	112.00	183.95	N64° 50' 27"E	N:775438.04 E:1072226.62	N:775507.75 E:1072376.03
C10	1100.00	322.43	N08° 31' 18"E	N:775628.75 E:1072389.14	N:775946.48 E:1072460.42
C11	2000.00	30.34	N17° 21' 13"E	N:775551.73 E:1072398.19	N:775580.69 E:1072398.19
C12	112.00	55.08	S82° 11' 45"E	N:775475.79 E:1072097.09	N:775468.39 E:1072151.11

PLAN NOTES
1. SEE COVER SHEET FOR ENGINEER AND SURVEYOR SIGNATURES AND SEALS.
2. SEE SHEET 2 FOR LEGEND & ABBREVIATIONS.

NOT FOR CONSTRUCTION
1/29/2021



SCALE: As Noted
DATE: December 2020
JOB I.D. NO: 20-2853
Revisions
Rev. A - IWWC Comments & Stormwater Quality - 1/18/21
Rev. B - Per IWWC Conditions of Approval - 1/29/21

SHEET NO.
17
25

NARRATIVE:

THIS PROPOSAL CONSISTS OF THE DEVELOPMENT OF FIVE (5) EIGHT-UNIT APARTMENT BUILDINGS ON #9.1 ACRES IN THE EDGEWATER HILL MIXED USE DEVELOPMENT DISTRICT. THE PROJECT INCLUDES THE CONSTRUCTION OF #800 LINEAR FEET OF NEW ACCESS ROADWAY, ASSOCIATED SIDEWALKS, CIRCULATION DRIVES AND PARKING AREAS AND THE EXTENSION OF SEWER, WATER, GAS, ELECTRICITY AND COMMUNICATIONS UTILITIES TO SERVE THE PROPOSED BUILDINGS.

STORMWATER RUNOFF FROM THE PROPOSED IMPERVIOUS AREAS WILL BE COLLECTED IN DEEP SUMP CATCH BASINS WITH HOODED OUTLETS AT THE DOWNSTREAM STRUCTURE PRIOR TO DISCHARGING TO TWO STORMWATER BASINS FOR DETENTION OF PEAK STORMWATER RUNOFF RATES. THE LOW LEVEL OUTLETS OF THE STORMWATER BASINS ARE ELEVATED ABOVE THE BASIN BOTTOMS TO RETAIN THE WATER QUALITY VOLUME ON-SITE FOLLOWING STORM EVENTS. DUE TO THE PRESENCE OF A RESTRICTIVE LAYER AND PERCHED GROUNDWATER TABLES THE BOTTOM OF THE BASINS ARE SLOPED AND WILL BE PROVIDED WITH UNDERDRAINS SIZED TO ALLOW THE BASINS TO DRAIN WITHIN 72 HOURS FOLLOWING STORM EVENTS. GROUNDWATER RECHARGE WILL BE PROVIDED BY DRY WELLS WITH HIGH LEVEL OVERFLOWS THAT WILL CAPTURE THE RUNOFF FROM THE PROPOSED BUILDING ROOFS AND GRASSED AREAS.

ACCORDING TO THE UNITED STATES DEPARTMENT OF AGRICULTURE (USDA), NATURAL RESOURCES CONSERVATION SERVICE (NRCS) WEB SOIL SURVEY FOR THE STATE OF CONNECTICUT, THE SOILS LOCATED IN THE DEVELOPMENT AREA ARE AS FOLLOWS:

- 3 RIDEBURRY, LEICESTER & WHITMAN SOILS, 0-8% SLOPES, EXTREMELY STONY (HSG D) (CT WETLAND SOIL)
- 46C WOODBRIDGE FINE SANDY LOAM, 8-15% SLOPES, VERY STONY (HSG C/D)
- 86D PAXTON AND MONTAUK FINE SANDY LOAMS, 15-35% SLOPES, EXTREMELY STONY (HSG C)

INLAND WETLANDS LOCATED UPON THE SUBJECT PROPERTY ARE AS SHOWN ON THE APPROVED EDGEWATER HILL MASTER PLAN, AND PERMITS TO CONDUCT REGULATED ACTIVITIES FOR THE PROPOSED WORK ARE REQUIRED FROM THE MUNICIPAL WETLANDS AND PERCHED GROUNDWATER TABLES THE BOTTOM OF THE BASINS ARE SLOPED AND WILL BE PROVIDED WITH UNDERDRAINS SIZED TO ALLOW THE BASINS TO DRAIN WITHIN 72 HOURS FOLLOWING STORM EVENTS. GROUNDWATER RECHARGE WILL BE PROVIDED BY DRY WELLS WITH HIGH LEVEL OVERFLOWS THAT WILL CAPTURE THE RUNOFF FROM THE PROPOSED BUILDING ROOFS AND GRASSED AREAS.

CONTINUOUS SEDIMENT BARRIERS WILL BE INSTALLED AT LOCATIONS SHOWN PRIOR TO ANY EARTHWORK OPERATIONS. THESE MEASURES WILL BE MAINTAINED UNTIL ALL DISTURBED AREAS HAVE BEEN PERMANENTLY STABILIZED. GRUBBING OF STUMPS SHALL BE COMPLETED IN PHASES AS SHOWN ON THE EROSION AND SEDIMENTATION CONTROL PLAN TO LIMIT THE AMOUNT OF DISTURBED SOILS AT ANY TIME.

REFERENCE IS MADE TO:

- 1. CONNECTICUT GUIDELINES FOR SOIL EROSION AND SEDIMENT CONTROL, MAY 2002.
- 2. SOIL SURVEY OF MIDDLESEX COUNTY CONNECTICUT, U.S.D.A. NATURAL RESOURCES CONSERVATION SERVICE.

DEVELOPMENT SCHEDULE:

PRIOR TO THE START OF CONSTRUCTION, THE CONTRACTOR IS TO SCHEDULE A MANDATORY PRECONSTRUCTION MEETING ON SITE TO DISCUSS ISSUES AS THEY RELATE TO THE PROPOSED PROJECT. THESE ISSUES WILL INCLUDE BUT NOT BE LIMITED TO:

- 1. RESOURCE PROTECTION.
- 2. CONSTRUCTION VEHICLE ACCESS, PARKING AND FUELING.
- 3. CONSTRUCTION METHODS AND SCHEDULING.
- 4. EXISTING SITE UTILITIES AND MARK-OUT COORDINATION.
- 5. MATERIAL DELIVERY AND STOCKPILING.
- 6. UTILITY AS-BUILT DRAWINGS.
- 7. STORMWATER POLLUTION CONTROL PLAN AND SITE INSPECTION PROCEDURES.

SUGGESTED SEQUENCE OF CONSTRUCTION:

PHASE 1 – INSTALLATION OF EROSION CONTROLS

- 1. OBTAIN APPROPRIATE PERMITS, NOTIFY TOWN OFFICIALS OF CONSTRUCTION COMMENCEMENT, AND SUBMIT CONSTRUCTION TIMETABLE.
- 2. FLAG THE LIMITS OF CONSTRUCTION AND CLEARING LIMITS.
- 3. INSTALL THE CONSTRUCTION ENTRANCE/ANTI-TRACKING PAD.
- 4. ON-SITE CONSTRUCTION SEQUENCE SHALL START WITH CLEARING WITHIN THE PROPOSED CLEARING LIMITS AND REMOVE CUT WOOD, CHIP BRUSH AND SLASH, STOCKPILE CHIPS FOR FUTURE USE OR REMOVE OFF SITE, DO NOT GRUB STUMPS.
- 5. INSTALL GEOTEXTILE SEEDING FENCE, WOOD CHIP BERMS, AND/OR COMPOST FILTER TUBES AS SHOWN ON PLAN.
- 6. FOLLOWING INSTALLATION OF THE EROSION CONTROLS, THE CONTRACTOR SHALL CONTACT THE ENGINEER AND TOWN STAFF FOR INSPECTION AND APPROVAL OF INSTALLED MEASURES. NO WORK SHALL COMMENCE UNTIL ALL EROSION CONTROL MEASURES HAVE BEEN INSTALLED AND APPROVED.

PHASE 2 – SITE PREPARATION

- 1. GRUBBING SHALL BE COMPLETED IN PHASES AS SHOWN ON THE EROSION AND SEDIMENTATION CONTROL PLAN TO LIMIT THE AMOUNT OF DISTURBED SOIL AT ANY TIME.
- 2. STRIP AND STOCKPILE TOPSOIL FROM PROPOSED GRADING AREAS BY PHASE AFTER EROSION AND SEDIMENT CONTROL MEASURES HAVE BEEN INSTALLED. THE TOPSOIL SHALL BE SEEDED IMMEDIATELY AFTER STOCKPILING IN ORDER TO STABILIZE THE SOILS AND LIMIT SEDIMENT RUNOFF. STOCKPILED TOPSOIL SHALL BE SEEDED AND MULCHED WHEN IT IS TO BE STORED FOR MORE THAN 21 DAYS FROM TIME OF STOCKPILING.
- 3. MAKE ALL CUTS AND FILLS REQUIRED BY PHASE. ESTABLISH THE SUBGRADE FOR THE TOPSOIL AREAS, PARKING AND ROADWAY AS REQUIRED AND BENCH THE BUILDING TO A SUBGRADE. ALLOW A REASONABLE AMOUNT OF AREA AROUND THE FOOTPRINT OF THE BUILDING FOR THE CONSTRUCTION ACTIVITIES.
- 4. COMPACT SUBGRADE TO 95% MAXIMUM DENSITY PRIOR TO PLACING FILL OR SUBBASE FOR PAVED AREAS.

PHASE 3 – SITE IMPROVEMENTS AND BUILDING CONSTRUCTION

- 1. CONSTRUCT TEMPORARY HAUL ROAD, ASSOCIATED TEMPORARY SEDIMENT TRAP, AND ROUGH GRADE EXTENSION OF EDGEWATER CIRCLE.
- 2. PRIOR TO INSTALLING SURFACE WATER CONTROLS SUCH AS TEMPORARY DIVERSIONS AND WATER BARS, INSPECT EXISTING CONDITIONS TO ENSURE DISCHARGE LOCATIONS ARE STABLE. IF NOT STABLE, REVIEW DISCHARGE CONDITIONS WITH THE DESIGN ENGINEER AND IMPLEMENT ADDITIONAL STABILIZATION MEASURES PRIOR TO INSTALLING WATER SURFACE CONTROLS.
- 3. CONSTRUCT TEMPORARY SEDIMENT TRAPS 1 AND 2.
- 4. CONSTRUCT PERMANENT STORMWATER BASINS EARLY IN THE SEQUENCE OF CONSTRUCTION AND INSTALL UPGRADENT EROSION CONTROL MEASURES TO PROTECT STORMWATER BASINS FROM RUNOFF. LOAM, SEED AND MULCH STORMWATER BASINS WITH SPECIFIED SEED MIXES.
- 5. INSTALL ALL SANITARY SEWERS, DRAINAGE SYSTEMS AND UTILITIES TO WITHIN 5 FEET OF THE BUILDING OR AS OTHERWISE MODIFIED BY THE DESIGN ENGINEER TO ADJUST FOR UNFORSEEN SITE CONDITIONS.
- 6. PERFORM MASS EARTHWORK AS REQUIRED TO ESTABLISH SUB-BASES FOR BUILDINGS 1 AND 2.
- 7. PREPARE SUB-BASE, SLOPES, PARKING AREAS, SHOULDER AREAS, ACCESS ROADS AND ANY OTHER AREA OF DISTURBANCE FOR FINAL GRADING.
- 8. INSTALL SUBBASE AND BASE COURSES OF GRAVEL IN PARKING AREAS.
- 9. PLACE TOPSOIL WHERE REQUIRED TO COMPLETE THE PERIMETER LANDSCAPE PLANTINGS.
- 10. FINE GRADE, RAKE, SEED AND MULCH TO WITHIN 2 FEET OF THE CURBING.
- 11. UPON SUBSTANTIAL COMPLETION OF BUILDINGS 1 AND 2, COMPLETE THE BALANCE OF SITE WORK AND STABILIZATION OF ALL OTHER DISTURBED AREAS. INSTALL FIRST COURSE OF PAVING.
- 12. AFTER STABILIZATION OF ROADWAY AND AREAS SURROUNDING BUILDINGS 1 AND 2 CONTINUE EARTHWORK FOR BUILDINGS 3, 4 AND 5. EXCESS SOILS SHALL BE STOCKPILED IN THE DESIGNATED STAGING AREA, SURROUNDED WITH SILT FENCE, SEEDED WITH FINE GRASS, AND MULCHED WITH STRAW.

PHASE 4 – FINAL SEEDING AND CLEANUP

- 1. EXCAVATE COLLECTED SEDIMENT FROM SEDIMENT TRAPS AND BACKFILL TO DESIGN GRADES.
- 2. WHEN ALL OTHER WORK HAS BEEN COMPLETED, REPAIR AND SWEEP ALL PAVED AREAS FOR THE FINAL COURSE OF PAVING. INSPECT THE DRAINAGE SYSTEM AND CLEAN AS NEEDED.
- 3. INSTALL FINAL COURSE OF PAVEMENT AFTER STORMWATER BASIN VEGETATION HAS BEEN ESTABLISHED.
- 4. ALL DISTURBED AREAS SHALL BE PREPARED WITH TOPSOIL AND SEEDED AND MULCHED ACCORDING TO THIS PLAN.
- 5. AFTER ALL FINAL GRADED DISTURBED AREAS HAVE BEEN STABILIZED, REMOVE ALL EROSION AND SEDIMENT STRUCTURES. CLEAN ALL STORMWATER STRUCTURES OF SEDIMENT AND DEBRIS.

ANTICIPATED CONSTRUCTION SCHEDULE

NO.	PHASE DESCRIPTION	ESTIMATED DURATION
1	INSTALLATION OF EROSION CONTROLS	2 WEEKS
2	SITE PREPARATION	3 TO 4 MONTHS
3	SITE IMPROVEMENTS AND BUILDING CONSTRUCTION	15 TO 18 MONTHS
4	FINAL PAVING, FINAL SEEDING AND CLEANUP	1 TO 2 MONTHS

EROSION CONTROL OPERATION & MAINTENANCE:

THE SITE CONTRACTOR SHALL BE RESPONSIBLE FOR THE INSTALLATION AND MAINTENANCE OF EROSION AND SEDIMENT CONTROL MEASURES THROUGHOUT THE PROJECT. NO CONSTRUCTION SHALL PROCEED UNTIL PROPER SEDIMENTATION AND EROSION CONTROL METHODS HAVE BEEN INSTALLED AS THE SEQUENCE OF CONSTRUCTION NECESSITATES.

MAINTENANCE OF EROSION AND SEDIMENT CONTROLS SHALL BE COMPLETED IN ACCORDANCE WITH THE CONNECTICUT GUIDELINES FOR SOIL EROSION AND SEDIMENT CONTROL (2002). THE CONTRACTOR SHALL MAINTAIN A COPY OF THE GUIDELINES ON-SITE AND REFER TO THE APPROPRIATE MAINTENANCE PROCEDURES THAT SHALL BE UTILIZED DURING THE CONSTRUCTION (<https://portal.ct.gov/DEEP/Water/Soil-Erosion-and-Sediment-Control-Guidelines/>) *Guidelines for Soil-Erosion-and-Sediment-Control*. A SUMMARY OF THE MAINTENANCE REQUIREMENTS FOR THE PROJECT IS PROVIDED BELOW.

DURING CONSTRUCTION, ALL EROSION AND SEDIMENT CONTROL MEASURES SHALL BE MAINTAINED IN PROPER WORKING ORDER. DISTURBED AREAS SHALL BE KEPT TO A MINIMUM AND SHALL ONLY TAKE PLACE WHERE IMMEDIATELY REQUIRED TO FURTHER CONSTRUCTION. IT IS DESIRABLE FROM AN EROSION PREVENTION PERSPECTIVE TO MINIMIZE DISTURBED AREAS. FINAL GRADING AND SEEDING SHALL TAKE PLACE AS SOON AS PRACTICAL.

A RAIN GAUGE SHALL BE PLACED AT THE PROJECT IN A WORKABLE LOCATION AND MONITORED DURING RAINFALL PERIODS UNTIL ALL DISTURBED AREAS ARE STABILIZED.

EVERY PRECAUTION SHALL BE USED DURING CONSTRUCTION TO PREVENT AND MINIMIZE THE DEGRADATION OF THE EXISTING WATER QUALITY FROM STORMWATER RUNOFF DURING CONSTRUCTION. ALL ACTIVITIES SHALL BE IN CONFORMANCE TO AND CONSISTENT WITH ALL APPLICABLE WATER QUALITY STANDARDS AND MANAGEMENT PRACTICES AS SET FORTH BY LOCAL, STATE AND FEDERAL AGENCIES.

THE SITE CONTRACTOR SHALL APPOINT AN ONSITE AGENT WHO SHALL BE PERSONALLY RESPONSIBLE FOR IMPLEMENTING THIS EROSION AND SEDIMENT CONTROL PLAN AND ENFORCING THE PRESCRIBED SAFEGUARDS DURING THE EXCAVATION AND OPERATIVE PERIOD.

THIS RESPONSIBILITY INCLUDES THE INSTALLATION AND MAINTENANCE OF CONTROL MEASURES THROUGHOUT THE PROJECT, INFORMING ALL PARTIES ENGAGED ON SITE OF THE REQUIREMENTS AND OBJECTIVES OF THE PLAN, AND NOTIFYING THE PROPER AGENCY AND OFFICIALS OF ANY TRANSFER OF THIS RESPONSIBILITY.

ALL EROSION AND SEDIMENT CONTROL MEASURES SHALL BE REPAIRED, CLEANED AND/OR REPLACED AS NECESSARY THROUGHOUT THE PROJECT IN ORDER TO MAINTAIN COMPLETE AND INTEGRAL EROSION AND SEDIMENT CONTROL PROTECTION. ONCE IN PLACE, ALL EROSION AND SEDIMENT CONTROL MEASURES ARE TO REMAIN IN PLACE IN PROPER CONDITION AND BE CONTINUOUSLY MAINTAINED UNTIL FINAL SITE RESTORATION HAS BEEN COMPLETED. FOLLOWING SUCH PERMANENT STABILIZATION, THE EROSION AND SEDIMENT CONTROL MEASURES SHALL BE DISMANTLED, REMOVED, AND DISPOSED OF IN AN APPROPRIATE MANNER. ADDITIONAL MEASURES BEYOND THOSE SHOWN ON THIS PLAN SET OR PRESENT SHALL BE PUT IN PLACE WHEN NECESSARY TO ADDRESS FIELD CONDITIONS AND/OR AS ORDERED BY THE ENGINEER OR TOWN STAFF. WHERE SITES HAVE BEEN TEMPORARILY OR FINALLY STABILIZED, SUCH INSPECTION SHALL BE CONDUCTED AT LEAST ONCE EVERY MONTH FOR THREE CONSECUTIVE MONTHS.

QUALIFIED PERSONNEL PROVIDED BY THE SITE CONTRACTOR SHALL INSPECT PERIMETER EROSION CONTROL MEASURES, ALL DISTURBED AREAS AND THE LOCATIONS WHERE VEHICLES ENTER AND LEAVE THE SITE. THESE AREAS SHALL BE INSPECTED AT LEAST ONCE EVERY SEVEN CALENDAR DAYS AND WITHIN TWENTY-FOUR HOURS AT THE END OF A STORM THAT IS 0.5 INCHES OR GREATER. ADDITIONAL MEASURES BEYOND THOSE INDICATED AND/OR SHOWN ON THIS PLAN SET OR PRESENT SHALL BE PUT IN PLACE WHEN NECESSARY TO ADDRESS FIELD CONDITIONS AND/OR AS ORDERED BY THE ENGINEER OR TOWN STAFF. WHERE SITES HAVE BEEN TEMPORARILY OR FINALLY STABILIZED, SUCH INSPECTION SHALL BE CONDUCTED AT LEAST ONCE EVERY MONTH FOR THREE CONSECUTIVE MONTHS.

NO SOIL, FILL OR OTHER MATERIALS SHALL BE DEPOSITED IN SURROUNDING INLAND WETLANDS.

ALL TEMPORARY STORAGE AND/OR STOCKPILE AREAS SHALL BE PROPERLY STABILIZED TO PREVENT EROSION AND SUITABLY CONTAINED TO PREVENT TURBID RUNOFF.

DUMPING OF OIL OR OTHER DELETERIOUS MATERIALS ON THE GROUND IS FORBIDDEN. THE APPLICANT SHALL PROVIDE A MEANS OF CATCHING, RETAINING AND PROPERLY DISPOSING OF DRAINED OIL, REMOVED OIL FILTERS, OR OTHER DELETERIOUS MATERIAL FROM EQUIPMENT USED ON SITE. MAJOR VEHICLE MAINTENANCE SHALL BE COMPLETED OFF SITE. ALL OIL SPILLS SHALL BE IMMEDIATELY REPORTED TO THE DEPARTMENT OF ENERGY AND ENVIRONMENTAL PROTECTION/HAZARDOUS MATERIALS OFFICE. FAILURE TO DO SO MAY RESULT IN THE IMPOSITION OF FINES UNDER THE APPLICABLE CONNECTICUT GENERAL STATUTES.

DURING CONSTRUCTION, THE SITE CONTRACTOR SHALL BE RESPONSIBLE FOR SITE INSPECTION AND MAINTENANCE TO INSURE PROPER PERFORMANCE OF EROSION CONTROL MEASURES. INSPECTION AND MAINTENANCE SHALL INCLUDE, AT A MINIMUM, THE FOLLOWING:

- INSPECT ALL SEDIMENT FENCE, WOOD CHIP BERMS AND OTHER EROSION CONTROL MEASURES. REPAIR OR REPLACE ANY DAMAGED PORTION IN ORDER TO INSURE ITS PROPER AND EFFECTIVE OPERATION. REMOVE ACCUMULATED SEDIMENT IF REQUIRED (GREATER THAN 4" DEPTH).
- INSPECT ALL STOCKPILES. REPAIR OR REPLACE ANY DAMAGED PORTION OF EROSION CONTROL MEASURES SURROUNDING THESE AREAS IN ORDER TO PREVENT SEDIMENTATION DOWNGRADEMENT. RESEED AND RE-MULCH AS REQUIRED TO STABILIZE STOCKPILES.
- INSPECT GRASS RESTORED AREAS. REVEGETATE ANY ERODED OR DISTURBED AREAS TO PROVIDE PERMANENT STABILIZATION. REMOVE AND DISPOSE OF ANY AREAS THAT DO NOT HAVE A SUITABLE STAND OF GRASS OR ANY SCOURED AREAS TO PROVIDE PERMANENT STABILIZATION.
- INSPECT ANTI-TRACKING PAD. REMOVE AND DISPOSE OF PAD AND REPLACE IF PAD IS NO LONGER FUNCTIONING EFFICIENTLY OR ACCUMULATED SEDIMENT IS TO A DEPTH OF 2" BELOW THE STONE SURFACE.
- INSPECT ALL STONE CHECK DAMS, TEMPORARY DIVERSIONS, AND WATER BARS. REMOVE ACCUMULATED SEDIMENT IF REQUIRED (BLOCKING MORE THAN 3" DEPTH OF FLOW).
- INSPECT ALL TEMPORARY AND PERMANENT STORMWATER BASINS. REMOVE ACCUMULATED SEDIMENT IF REQUIRED (GREATER THAN 6" DEPTH). REVEGETATE IF NECESSARY TO PROVIDE STABILIZATION.
- INSPECT DOWNGRADEMENT AREAS OF ALL STORMWATER DISCHARGES AND DEVELOPMENT AREAS. STABILIZE ANY ERODED AREAS IF FOUND.

EROSION AND SEDIMENT CONTROL BEST MANAGEMENT PRACTICES (BMP'S)

MINIMIZE DISTURBED AREA AND PROTECT NATURAL FEATURES AND SOIL

TOPSOIL:

TOPSOIL WILL BE REMOVED AND STOCKPILED ON SITE AND UTILIZED FOR FINAL GRADING. ADDITIONAL TOPSOIL IF REQUIRED, WILL BE EXPEDITED FROM OFF-SITE TO THE PROJECT. TOPSOIL SHALL BE STORED IN AREAS OF THE PROPOSED CONSTRUCTION THAT ARE NOT INTENDED FOR REUSE WILL BE IMMEDIATELY REMOVED FROM THE SITE. WHEN SOIL IS STOCKPILED, THE SLOPE OF THE STOCKPILE WILL NOT EXCEED 2 HORIZONTAL TO 1 VERTICAL. GRUBBING OF STUMPS SHALL BE COMPLETED BY PHASE TO MINIMIZE AMOUNT OF DISTURBED SOILS.

INSTALL SCHEDULED AS NOTED, EXCAVATED TOPSOIL WILL BE STOCKPILED ON SITE. SEDIMENT FENCE WILL BE PLACED AROUND ANY STOCKPILES THAT ARE NOT IMMEDIATELY REMOVED FROM THE SITE TO PROTECT THE EXISTING DRAINAGE DITCHES AND OFF SITE AREAS.

MAINTENANCE AND INSPECTION: THE CUT AND FILL AREAS WILL BE INSPECTED WEEKLY FOR EROSION. THESE AREAS WILL BE STABILIZED IMMEDIATELY WITH EROSION CONTROLS OR GRADED TO AVOID POSSIBLE DISTURBANCE TO THE EXISTING DRAINAGE DITCHES OR OFF SITE AREAS. SEE ALSO MAINTENANCE AND INSPECTION PROCEDURES FOR SILT FENCE.

CONTROL STORMWATER FLOWING ONTO AND THROUGH THE PROJECT

AREA FOR SILT TO ACCUMULATE:

BMP INSTALLATION SCHEDULE: BEFORE ANY GRADING OPERATIONS BEGIN, A WOOD CHIP BERM OR SEDIMENT FENCE WILL BE INSTALLED ADJACENT TO THE AREAS UNDER CONSTRUCTION JUST OUTSIDE THE LIMITS OF DISTURBANCE. OTHER ADJACENT OFF SITE AREAS WILL ALWAYS BE PROTECTED BY A SEDIMENT FENCE OR ANOTHER BMP UNTIL FINAL STABILIZATION IS ACHIEVED.

SEDIMENT FENCE IS ALSO PROPOSED UPGRADENT OF DISTURBED AREAS TO MINIMIZE CLEAN RUNOFF ENTERING THE PROJECT AREA.

MAINTENANCE AND INSPECTION: THE GRADED AREAS AND SEDIMENT FENCE WILL BE INSPECTED WEEKLY TO ENSURE THAT THERE ARE NO STRUCTURAL FAILURES AND IMMEDIATELY AFTER RAIN EVENTS.

CONSTRUCTION SPECIFICATIONS

WOOD CHIP BERM: THE MATERIAL FOR WOOD CHIP BERMS WILL BE ACQUIRED IN CONJUNCTION WITH THE REMOVAL AND CHIPPING OF TREES LOCATED WITHIN THE PROJECT AREA.

INSTALLATION: ERECT WOOD CHIP BERM IN A CONTINUOUS FASHION AT THE SPECIFIED HEIGHT AND WIDTH.

MAINTENANCE: 1. SEDIMENT SHOULD BE REMOVED ONCE IT HAS ACCUMULATED TO A DEPTH OF 4". 2. BERM SHOULD BE REPAIRED IF IT HAS BEEN BROKEN. 3. BERM CAN BE LEFT IN PLACE PERMANENTLY AND LEFT TO DETERIORATE. 4. ALL SEDIMENT ACCUMULATED AT THE BERM SHOULD BE REMOVED AND PROPERLY DISPOSED OF IF THE BERM IS TO BE REMOVED.

SEDIMENT FENCE: 1. THE MATERIAL FOR SEDIMENT FENCES SHOULD BE A PERVIOUS SHEET OF SYNTHETIC FABRIC SUCH AS POLYPROPYLENE, NYLON, POLYESTER, OR POLYETHYLENE YARN. 2. THE STAKES USED TO ANCHOR THE FILTER FABRIC SHOULD BE WOOD OR METAL. WOODEN STAKES SHOULD BE AT LEAST 3 FEET LONG AND HAVE A MINIMUM DIAMETER OF 2 INCHES IF A HARDWOOD LIKE OAK IS USED. STAKES FROM SOFT WOODS LIKE PINE SHOULD BE AT LEAST 4 INCHES IN DIAMETER.

INSTALLATION: 1. CUT SECTIONS FROM A ROLL OF FABRIC TO ELIMINATE GAPS IN THE FABRIC. IF A CONTINUOUS ROLL OF FABRIC IS NOT AVAILABLE, OVERLAP THE FABRIC FROM BOTH DIRECTIONS ONLY AT STAKES OR POSTS. OVERLAP AT LEAST 8 INCHES. EXCAVATE A TRENCH TO BURY THE BOTTOM OF THE FABRIC FENCE AT LEAST 6 INCHES BELOW THE GROUND SURFACE. THIS WILL BE USED TO PREVENT GAPS FROM FORMING NEAR THE GROUND SURFACE. GAPS WOULD MAKE THE FENCING USELESS AS A SEDIMENT BARRIER. 4. THE HEIGHT OF THE FENCE POSTS SHOULD BE 16 TO 34 INCHES ABOVE THE ORIGINAL GROUND SURFACE. SPACE THE POSTS NO MORE THAN 10 FEET APART. 5. THE FENCE SHOULD BE DESIGNED TO WITHSTAND THE RUNOFF FROM A 10-YEAR PEAK STORM EVENT. ONCE INSTALLED, IT SHOULD REMAIN IN PLACE UNTIL ALL AREAS UPSLOPE HAVE BEEN PERMANENTLY STABILIZED BY VEGETATION OR OTHER MEANS.

MAINTENANCE: 1. SEDIMENT SHOULD BE REMOVED ONCE IT HAS ACCUMULATED TO 4" DEPTH. 2. FILTER FABRIC SHOULD BE REPLACED WHENEVER IT HAS DETERIORATED TO SUCH AN EXTENT THAT THE EFFECTIVENESS OF THE FABRIC IS REDUCED (APPROXIMATELY SIX MONTHS). 3. SEDIMENT FENCE SHOULD REMAIN IN PLACE UNTIL DISTURBED AREAS HAVE BEEN PERMANENTLY STABILIZED. 4. ALL SEDIMENT ACCUMULATED AT THE FENCE SHOULD BE REMOVED AND PROPERLY DISPOSED OF BEFORE THE FENCE IS REMOVED.

INSPECTION: 1. THE MATERIAL FOR SEDIMENT FENCES SHOULD BE A PERVIOUS SHEET OF SYNTHETIC FABRIC SUCH AS POLYPROPYLENE, NYLON, POLYESTER, OR POLYETHYLENE YARN. 2. THE STAKES USED TO ANCHOR THE FILTER FABRIC SHOULD BE WOOD OR METAL. WOODEN STAKES SHOULD BE AT LEAST 3 FEET LONG AND HAVE A MINIMUM DIAMETER OF 2 INCHES IF A HARDWOOD LIKE OAK IS USED. STAKES FROM SOFT WOODS LIKE PINE SHOULD BE AT LEAST 4 INCHES IN DIAMETER.

- 1. INSPECT SEDIMENT FENCE BEFORE ANTICIPATED STORM EVENTS (OR SERIES OF STORM EVENTS SUCH AS INTERMITTENT SHOWERS OVER ONE OR MORE DAYS) AND WITHIN 24 HOURS AFTER THE END OF A STORM EVENT OF 0.5 INCHES OR GREATER, AND AT LEAST ONCE EVERY SEVEN CALENDAR DAYS, AT LEAST 72 HOURS APART.
- 2. WHERE SITES HAVE BEEN FINALLY OR TEMPORARILY STABILIZED, SUCH INSPECTIONS MAY BE CONDUCTED ONCE PER MONTH.

STRAW BALE BARRIER

- INSTALLATION:
- 1. EXCAVATE TRENCH 4" AND PLACE MATERIAL UPSLOPE OF TRENCH.
 - 2. PLACE BALES IN A SINGLE ROW IN THE TRENCH, LENGTHWISE, WITH ENDS OF ADJACENT BALES TIGHTLY ABUTTING ONE ANOTHER AND THE ENDINGS ORIENTED AROUND THE SIDES RATHER THAN ALONG THE TOPS AND BOTTOMS OF THE BALES (TO AVOID PREATURE ROTTING OF THE BINDINGS).
 - 3. ANCHOR EACH BALE WITH AT LEAST 2 STAKES, DRIVING THE FIRST STAKE IN EACH BALE TOWARD THE PREVIOUSLY LAID BALE TO FORCE THE BALES TOGETHER. STAKES MUST BE DRIVEN A MINIMUM OF 18 INCHES INTO THE GROUND. FILL ANY GAPS BETWEEN THE BALES WITH STRAW TO PREVENT WATER FROM ESCAPING BETWEEN THE BALES.
 - 4. BACKFILL THE BALES WITH THE EXCAVATED TRENCH MATERIAL TO A MINIMUM DEPTH OF 4 INCHES ON THE UPHILL SIDE OF THE BALES. TAMP BY HAND OR MACHINE AND COMPACT THE SOIL. LOOSE STRAW SCATTERED OVER THE DISTURBED AREA IMMEDIATELY UPHILL FROM THE STRAW BALE BARRIER TENDS TO INCREASE BARRIER EFFICIENCY.

MAINTENANCE: 1. INSPECT THE STRAW BALE BARRIER AT LEAST ONCE A WEEK AND WITHIN 24 HOURS OF THE END OF A STORM WITH A RAINFALL AMOUNT OF 0.5 INCH OR GREATER TO DETERMINE MAINTENANCE NEEDS. FOR DEWATERING OPERATIONS, INSPECT FREQUENTLY BEFORE, DURING, AND AFTER PUMPING OPERATIONS. REMOVE THE SEDIMENT DEPOSITS WHEN SEDIMENT DEPOSITS REACH APPROXIMATELY ONE HALF THE HEIGHT OF THE BARRIER.

- 2. REPLACE OR REPAIR THE BARRIER WITHIN 24 HOURS OF OBSERVED FAILURE. FAILURE OF THE BARRIER HAS OCCURRED WHEN SEDIMENT FALLS TO BE RETAINED BY THE BARRIERS.
- (a) THE BARRIER HAS BEEN OVERTOPPED, UNDERCUT OR BYPASSED BY RUNOFF WATER.
- (b) THE BARRIER HAS BEEN MOVED OUT OF POSITION, OR
- (c) THE BALES HAVE DETERIORATED OR BEEN DAMAGED.
- 3. WHEN REPEITIVE FAILURES OCCUR AT THE SAME LOCATION, REVIEW CONDITIONS AND LIMITATIONS FOR USE AND DETERMINE IF ADDITIONAL CONTROLS ARE NEEDED TO REDUCE FAILURE RATE OR REPLACE STRAW BALE BARRIER.
- 4. MAINTAIN THE STRAW BALE BARRIER UNTIL THE CONTRIBUTING AREA IS STABILIZED. AFTER THE UPSLOPE AREAS HAVE BEEN PERMANENTLY STABILIZED, PULL THE STAKES OUT OF THE STRAW BALES. REMOVE SEDIMENT.

DUST CONTROL:

DUST FROM THE SITE WILL BE CONTROLLED BY USING A MOBILE PRESSURE-TYPE DISTRIBUTOR TRUCK THAT WILL APPLY POTABLE WATER AT RATE OF 300 GALLONS PER ACRE AND MINIMIZED AS NEEDED TO AVOID PONDING. INSTALLATION SCHEDULE: DUST CONTROL WILL BE IMPLEMENTED AS NEEDED ONCE SITE GRADING HAS BEEN INITIATED, AND DURING WINDY CONDITIONS EXCEEDING 20MPH, WHEN SITE GRADING IS OCCURRING. SPRAYING OF POTABLE WATER WILL BE PERFORMED ONCE PER DAY DURING THE MONTHS OF MARCH THROUGH MAY AND NO MORE THAN THREE TIMES PER DAY FROM JUNE TO SEPTEMBER OR WHENEVER DRYNESS OF SOIL WARRANTS IT.

MAINTENANCE SCHEDULE: AT LEAST ONE MOBILE UNIT WILL BE AVAILABLE AT ALL TIMES DURING CONSTRUCTION TO APPLY POTABLE WATER. EACH MOBILE UNIT SHALL BE EQUIPPED WITH A POSITIVE SHUTOFF VALVE TO PREVENT OVER WATERING OF DISTURBED AREAS.

RETAIN SEDIMENT ON-SITE AND CONTROL DEWATERING PRACTICES

SIZE AND CONSTRUCT THE BASIN IN ACCORDANCE WITH THE REQUIREMENTS OF THE "CONNECTICUT GUIDELINES FOR SOIL EROSION AND SEDIMENT CONTROL, MAY 2002".

SITE PREPARATION:

CLEAR, GRUB AND STRIP TOPSOIL TO REMOVE TREES, VEGETATION, ROOTS, OR OTHER UNSUITABLE MATERIAL FROM AREAS UNDER THE EMBANKMENT OR ANY STRUCTURAL WORKS RELATED TO THE BASIN.

CLEAR AND GRUB THE AREA OF MOST FREQUENT INUNDATION (MEASURED FROM THE TOP OF THE OUTLET CONTROL STRUCTURE) OF ALL BRUSH AND TREES TO FACILITATE CLEAN OUT AND RESTORATION.

INSTALL SEDIMENT CONTROL OR CONTRIBUTING AREAS. INSTALL SEDIMENT CONTROLS TO TRAP SEDIMENT BEFORE IT ENTERS AND LEAVES THE DETENTION BASIN CONSTRUCTION SITE. STABILIZE THE BASIN IN ACCORDANCE WITH THE ENGINEERED DESIGN. STABILIZE THE SPOIL AND BORROW AREAS, AND OTHER DISTURBED AREAS IN ACCORDANCE WITH THE ENGINEERED DESIGN. STABILIZATION OF AREAS SHALL BE ACCORDING TO THE FOLLOWING:

INSTALL SAFETY FEATURES AND DEVICES TO PROTECT HUMANS AND ANIMALS FROM SUCH ACCIDENTS AS FALLING OR DROWNING; TEMPORARY FENCING CAN BE USED UNTIL BARRIER PLANTINGS ARE ESTABLISHED. USE PROTECTIVE MEASURES SUCH AS GUARDRAILS AND FENCES ON SPILLWAYS AND IMPOUNDMENTS AS NEEDED.

MAINTENANCE: 1. INSPECT THE TEMPORARY SEDIMENT BASIN AT LEAST ONCE A WEEK AND WITHIN 24 HOURS OF THE END OF A STORM WITH A RAINFALL AMOUNT OF 0.5 INCHES OR GREATER TO DETERMINE CONDITIONS IN THE BASIN. CLEAN THE BASIN OF COLLECTED SEDIMENTS WHEN SEDIMENT ACCUMULATION EXCEEDS 6 INCHES. SEDIMENT LEVELS SHALL BE MARKED WITHIN THE SEDIMENT STORAGE AREA BY STAKES OR OTHER MEANS SHOWING THE THRESHOLD ELEVATION FOR SEDIMENT CLEANOUT. PRIOR TO THE REMOVAL OF SEDIMENTS, DEWATER THE BASIN THROUGH PUMPING OR OTHER MEANS TO EXPOSE PREVIOUSLY SUBMERGED SEDIMENTS. DO NOT ALLOW ACCUMULATED SEDIMENT TO FLUSH INTO THE DRAINAGEWAY. STOCKPILE THE SEDIMENT IN SUCH A MANNER THAT IT WILL NOT ERODE FROM THE SITE OR INTO A WETLAND, WATERCOURSE OR OTHER SENSITIVE AREA.

TEMPORARY SEDIMENT BASIN BOTTOM SHALL BE 2 FEET ABOVE THE PROPOSED BOTTOM OF THE PERMANENT STORMWATER BASIN. THE STORMWATER BASIN SHALL BE EXCAVATED TO DESIGN GRADES ONLY AFTER ALL UPGRADENT AREAS HAVE BEEN STABILIZED AND BEFORE FINAL PAVING.

DEWATERING:

BMP DESCRIPTION/INSTALLATION: IN THE EVENT GROUNDWATER IS ENCOUNTERED DURING CONSTRUCTION, DEWATERING MAY BE REQUIRED THROUGH THE USE OF SUMP PUMPS. INSTALLATION OF SUMPS SHALL FOLLOW THE REQUIREMENTS OF THE SUMP PIT. THE PURPOSE OF THIS PRACTICE IS TO REMOVE EXCESSIVE WATER FROM EXCAVATIONS IN A MANNER THAT IMPROVES THE QUALITY OF THE WATER BEING PUMPED. PUMPED WATER SHALL BE DISCHARGED TO AN APPROVED FILTERING SYSTEM.

CONSTRUCTION SPECIFICATIONS

- SUMP PIT
- 1. A PERFORATED VERTICAL STANDPIPE SHALL BE PLACED IN THE CENTER OF THE PIT TO COLLECT FILTERED WATER. THE STANDPIPE SHALL BE SLOTTED OR PERFORATED CORRUGATED METAL OR PVC PIPE AND ITS DIAMETER AND NUMBER OF PERFORATIONS SHALL BE COMPATIBLE WITH THE PUMP SIZE BEING USED.
 - 2. WATER SHALL THEN BE PUMPED FROM THE CENTER OF THE PIPE TO A SUITABLE DISCHARGE AREA (SEDIMENT FILTER BAG OR DEWATERING SETTLING BASIN).
 - 3. THE PIT SHALL BE FILLED WITH CRUSHED STONE OR GRAVEL NO SMALLER THAN CT DOT #67 SIZE NOR LARGER THAN CT DOT #3 SIZE. CRUSHED STONE SHALL EXTEND A MINIMUM OF 12" BELOW THE BOTTOM OF THE STANDPIPE.
 - 4. DISCHARGE OF WATER PUMPED FROM THE STANDPIPE SHALL BE TO A SUITABLE PRACTICE SUCH AS A SEDIMENT FILTER BAG OR AN APPROVED DEWATERING SETTLING BASIN.
 - 5. FILTER FABRIC SHALL BE WRAPPED AROUND THE STANDPIPE TO ENSURE CLEAN WATER DISCHARGE. IT IS RECOMMENDED THAT 1/4 TO 1/2 INCH HARDWARE CLOTH WIRE MESH BE WRAPPED AROUND AND SECURED TO THE STANDPIPE PRIOR TO ATTACHING THE FILTER FABRIC. THIS WILL INCREASE THE RATE OF WATER SEEPAGE INTO THE STANDPIPE.

SOIL STABILIZATION:

TEMPORARY STABILIZATION: BMP DESCRIPTION: HYDROMULCHING WILL BE USED ON SLOPES WHERE CONSTRUCTION WILL CEASE FOR MORE THAN 14 DAYS AND OVER THE WINTER MONTHS TO STABILIZE ERODIBLE MATERIALS. STRAW MULCH AND WOOD FIBER WILL BE MIXED WITH A TACKIFIER AND APPLIED UNIFORMLY BY MACHINE WITH AN APPLICATION RATE OF 2 TONS (100-200 BALES) PER ACRE. THE CONTRACTOR WILL USE CRIMPING EQUIPMENT TO BIND THE MULCH TO THE SOIL IF THE TACKIFIER IS NOT EFFECTIVE. NETTING WILL BE USED ON SMALL AREAS WITH STEEP SLOPES. IN AREAS WHERE HYDROMULCHING IS IMPOSSIBLE, STRAW MULCH WILL BE APPLIED BY HAND AT THE SAME APPLICATION RATE. TEMPORARY SEEDING WILL BE USED ON ANY AREA WHERE CONSTRUCTION ACTIVITY IS SUSPENDED FOR MORE THAN TWENTY-ONE DAYS TO STABILIZE ERODIBLE MATERIALS. SEE BELOW FOR GUIDANCE ON SEEDING MIXTURES, RATES, AND ACCEPTABLE PLANTING DATES FOR TEMPORARY SEEDING.

INSTALLATION SCHEDULE: PORTIONS OF THE SITE WHERE CONSTRUCTION ACTIVITIES WILL TEMPORARILY CEASE FOR MORE THAN 14 DAYS WILL BE STABILIZED WITH MULCH. WHERE CONSTRUCTION ACTIVITIES WILL TEMPORARILY CEASE FOR MORE THAN 21 DAYS IT WILL BE TEMPORARILY SEEDED. WINTER STABILIZATION WILL BE PROVIDED BETWEEN DECEMBER 25 AND MARCH 30.

MAINTENANCE AND INSPECTION: MULCHED AREAS WILL BE INSPECTED WEEKLY TO ENSURE THAT ADEQUATE COVERAGE IS PROVIDED. REPAIRS WILL BE CONDUCTED AS NEEDED.

SEED MIXTURE FOR TEMPORARY SEEDING

LBS./ACRE	LBS./1000 S.F.
PERENNIAL RYEGRASS	40 1.0

SEE FIGURE TS-2 IN THE 2002 GUIDELINES FOR ADDITIONAL TEMPORARY SEED MIXES.

FINAL STABILIZATION:

PERMANENT SEEDING SHOULD BE APPLIED IMMEDIATELY AFTER THE FINAL DESIGN GRADES ARE ACHIEVED AT THE SITE BUT NO LATER THAN 14 DAYS AFTER CONSTRUCTION ACTIVITIES HAVE PERMANENTLY CEASED. AFTER THE ENTIRE SITE IS STABILIZED, ANY SEDIMENT THAT HAS ACCUMULATED SHALL BE REMOVED AND HAULLED OFF SITE. CONSTRUCTION DEBRIS, TRASH, AND TEMPORARY BMP'S SHALL ALSO BE REMOVED AND ANY AREAS DISTURBED DURING REMOVAL SHALL BE SEEDED IMMEDIATELY.

SEEDBED PREPARATION:

- 1. TOPSOIL WILL BE SPREAD OVER FINAL GRADED AREAS AT A MINIMUM DEPTH OF FOUR INCHES. TOPSOIL SHALL EXCLUSIVELY MEAN A FINELY SIEVED SOIL TEXTURE CLASSIFIED BY THE UNITED STATES DEPARTMENT OF AGRICULTURE CLASSIFICATION SYSTEM BASED UPON THE PROPORTION OF SAND, SILT, AND CLAY SIZE PARTICLES AFTER PASSING A 2 MILLIMETER (MM) SIEVE AND SUBJECTED TO A PARTICLE SIZE ANALYSIS:
 - 1.1. LOAMY SAND, INCLUDING COARSE, LOAMY FINE, AND LOAMY VERY FINE SAND, SANDY LOAM, INCLUDING COARSE, FINE AND VERY FINE SANDY LOAM, LOAM, OR SILTY LOAM WITH NOT MORE THAN 60% SILT;
 - 1.2. CONTAINING NOT LESS THAN 6% AND NOT MORE THAN 20% ORGANIC MATTER AS DETERMINED BY LOSS-ON-IGNITION OF OVEN DRIED SAMPLES DRIED AT 105 DEGREES CENTIGRADE;
 - 1.3. POSSESSING A PH RANGE OF 6.0-7.5, EXCEPT IF THE VEGETATIVE PRACTICE BEING USED SPECIFICALLY REQUIRES A

- LOWER PH, THEN PH MAY BE ADJUSTED ACCORDINGLY;
- 1.4. HAVING SOLUBLE SALTS NOT EXCEEDING 500 PPM;
- 1.5. AND THAT IS LOOSE AND FRABLE AND FREE FROM REFUSE, STUMPS, ROOTS, BRUSH, WEEDS, FROZEN PARTICLES, ROCKS, AND STONES OVER 1.25 INCH

**SPILL PREVENTION AND CONTROL
BEST MANAGEMENT PRACTICES (BMP'S) DESCRIPTION:**

1. MATERIAL HANDLING AND WASTE MANAGEMENT:

HAZARDOUS WASTE MATERIALS:

ALL WASTE MATERIALS WILL BE COLLECTED AND DISPOSED OF INTO METAL WASTE DUMPSTERS IN DESIGNATED AREAS. DUMPSTERS WILL HAVE A SECURE TIGHT LID, BE PLACED AWAY FROM STORM WATER DRAINS AND STRUCTURES, AND WILL MEET ALL FEDERAL, STATE, AND LOCAL REGULATIONS. ONLY TRASH AND CONSTRUCTION DEBRIS IN THE DUMPSTERS. CONSTRUCTION MATERIALS SHALL NOT BE BURIED ON SITE.

HAZARDOUS WASTE MATERIALS:

BMP DESCRIPTION: ALL HAZARDOUS WASTE MATERIALS INCLUDING OIL FILTERS, PETROLEUM PRODUCTS, PAINT, AND EQUIPMENT MAINTENANCE FLUIDS SHALL BE STORED IN STRUCTURALLY SOUND AND SEALED SHIPPING CONTAINERS IN A DESIGNATED AREA. HAZARDOUS WASTE MATERIALS SHALL BE STORED IN APPROPRIATE AND CLEARLY MARKED CONTAINERS AND SEGREGATED FROM OTHER NON-WASTE MATERIALS. SECONDARY CONTAINMENT SHALL BE PROVIDED FOR ALL WASTE MATERIALS IN A DESIGNATED AREA AND SHALL CONSIST OF COMMERCIALY AVAILABLE SPILL PALLETS OR EQUAL. ADDITIONALLY, ALL HAZARDOUS WASTE MATERIALS SHALL BE DISPOSED OF IN ACCORDANCE WITH FEDERAL, STATE, AND LOCAL REGULATIONS.

HAZARDOUS WASTE MATERIALS: HAZARDOUS WASTE MATERIALS SHALL NOT BE DISPOSED OF INTO THE ON-SITE DUMPSTERS.

HAZARDOUS WASTE MATERIALS:

BMP DESCRIPTION: THE HAZARDOUS WASTE MATERIALS AREA SHALL BE INSPECTED WEEKLY AND AFTER STORM EVENTS. THE STORAGE AREA SHALL BE KEPT CLEAN, WELL ORGANIZED AND EQUIPPED WITH AMPLIFIED CLEANUP SUPPLIES AS APPROPRIATE FOR THE MATERIALS BEING STORED. SAFETY DATA SHEETS, MATERIAL INVENTORY, AND EMERGENCY CONTACT NUMBERS SHALL BE MAINTAINED IN THE PROJECT OFFICE.

SANITARY WASTE:

BMP DESCRIPTION: PORTABLE TOILETS, LOCATED IN THE STAGING AREA, SHALL BE PROVIDED AT THE SITE THROUGHOUT THE CONSTRUCTION PHASE. THE TOILETS SHALL BE LOCATED AWAY FROM CONCENTRATED DRAINAGE FLOW PATHS AND SHALL HAVE COLLECTION PANS UNDERNEATH AS SECONDARY CONTAINMENT.

HAZARDOUS WASTE MATERIALS: SANITARY WASTE SHALL BE COLLECTED A MINIMUM OF ONCE A WEEK AND SHALL BE INSPECTED WEEKLY FOR EVIDENCE OF LEAKING HOLDING TANKS.

RECYCLING:

BMP DESCRIPTION: WOOD PALLETS, CARDBOARD BOXES, AND OTHER RECYCLABLE CONSTRUCTION SCRAPS SHALL BE DISPOSED OF IN A DESIGNATED DUMPSTER FOR RECYCLING. THE DUMPSTER SHALL HAVE A SECURE WATER TIGHT LID, BE PLACED AWAY FROM STORMWATER CONVEYANCES AND DRAINS AND MEET ALL LOCAL AND STATE SOLID-WASTE MANAGEMENT REGULATIONS. ONLY SOLID RECYCLABLE CONSTRUCTION SCRAPS FROM THE SITE SHALL BE DEPOSITED IN THE DESIGNATED DUMPSTER.

HAZARDOUS WASTE MATERIALS: THE RECYCLING DUMPSTER SHALL BE INSPECTED WEEKLY. THE RECYCLING DUMPSTER SHALL BE EMPTIED WHEN FULL AND TAKEN TO AN APPROVED RECYCLING CENTER BY THE CONTRACTOR. IF RECYCLABLE CONSTRUCTION WASTES ARE EXCEEDING THE DUMPSTER'S CAPACITY, THE DUMPSTERS SHALL BE EMPTIED MORE FREQUENTLY.

2. DESIGNATE WASHOUT AREAS:

CONCRETE WASHOUT

BMP DESCRIPTION: A DESIGNATED TEMPORARY, ABOVE-GRADE CONCRETE WASHOUT AREA SHALL BE CONSTRUCTED FOR CONCRETE WASHOUT. THE WASHOUT AREA SHALL BE LINED WITH PLASTIC SHEETING AT LEAST 10 MILS THICK AND BE FREE OF HOLES OR TEARS. CONCRETE POURS WILL NOT BE CONDUCTED DURING OR BEFORE AN ANTICIPATED STORM EVENT. CONCRETE MIXER TRUCKS AND CHUTES SHALL BE WASHED IN THE DESIGNATED WASHOUT AREA OR CONCRETE WASTES SHALL BE PROPERLY DISPOSED OF OFF-SITE. WHEN THE TEMPORARY WASHOUT AREA IS NO LONGER NEEDED FOR THE CONSTRUCTION PROJECT, THE HARDENED CONCRETE AND MATERIALS USED TO CONSTRUCT THE AREA WILL BE REMOVED AND DISPOSED OF IN ACCORDANCE WITH ALL APPLICABLE LOCAL, STATE AND FEDERAL REGULATIONS, AND THE AREA SHALL BE STABILIZED.

HAZARDOUS WASTE MATERIALS: THE WASHOUT AREA SHALL BE CONSTRUCTED BEFORE CONCRETE POURS OCCUR AT THE SITE.

3. VEHICLE FUELING AND MAINTENANCE PRACTICES:

BMP DESCRIPTION: SEVERAL TYPES OF VEHICLES AND EQUIPMENT WILL BE USED ON-SITE THROUGHOUT THE PROJECT, INCLUDING GRADERS, EXCAVATORS, LOADERS, ROADWAYS, TRAILERS, AND BACKHOES. ALL MINOR EQUIPMENT MAINTENANCE AND FUELING SHALL BE PERFORMED IN THE STAGING AREA. THIS PROPOSED ACTIVITY SHALL BE SITED SO THAT DRAINAGE FACILITIES OR WATER COURSES LOCATED IN THE AREA ARE NOT AT RISK FROM POTENTIAL INFILTRATION, ABSORBENT, SPILL-CLEANUP MATERIALS AND SPILL KITS SHALL BE AVAILABLE AT THE COMBINED STAGING AND MATERIALS STORAGE AREA. FUEL SHALL BE DELIVERED TO THE SITE ON AN AS NEEDED BASIS BY A FUEL DELIVERY SERVICE. EQUIPMENT AND MINOR MAINTENANCE OF EQUIPMENT WILL ONLY OCCUR IN DESIGNATED FUELING AREAS ON AN IMPERVIOUS SURFACE. VEHICLE AND EQUIPMENT WASHING IS PROHIBITED ON SITE.

HAZARDOUS WASTE MATERIALS: BMP'S IMPLEMENTED FOR FUELING ACTIVITIES SHALL BEGIN AT THE START OF THE PROJECT.

INVASIVE SPECIES MITIGATION PLAN:

1. INTRODUCTION OF INVASIVE PLANT SPECIES MAY BE A CONCERN DURING CONSTRUCTION AND FOLLOWING RESTORATION OF THE TEMPORARY WETLAND CROSSING AND THE STORMWATER BASINS. DURING CONSTRUCTION, THE FOLLOWING MEASURES SHALL BE IMPLEMENTED TO REDUCE THE LIKELIHOOD INVASIVE SPECIES INTRODUCTION:

a. TIMBER MATS USED FOR THE TEMPORARY WETLAND CROSSING SHALL BE CLEANED OF ALL SOIL AND VEGETATION PRIOR TO DELIVERY TO THE SITE.

b. CONSTRUCTION MATERIALS SUCH AS SEED MIXES, TOPSOIL, SAND, GRAVEL, CRUSHED STONE, AND ROCK BROUGHT TO THE PROJECT AREA FROM ANY OUTSIDE SOURCE SHALL BE FREE OF INVASIVE PLANT MATERIALS.

c. ALL MULCH AND BALES USED ON SITE SHALL BE WEED-FREE STRAW. HAY SHALL NOT BE PERMITTED ON SITE.

2. MONITORING SHALL BE CONDUCTED AT THE TEMPORARY CROSSING, RESTORED AREAS AT THE CROSSING, AND THE STORMWATER BASIN TWICE PER YEAR DURING CONSTRUCTION (SPRING AND FALL) AND FOR A PERIOD OF ONE (1) YEAR FOLLOWING THE COMPLETION OF CONSTRUCTION. MONITORING FOR INVASIVE PLANT SPECIES SHALL BE COMPLETED BY A QUALIFIED WETLANDS SCIENTIST. NON-NATIVE SPECIES IDENTIFIED DURING THE INITIAL WETLANDS INVESTIGATION FOR THIS PROJECT INCLUDE:

a. SMARTWEED (POLYGONUM PENNSYLVANICUM)
b. JAPANESE STILTGRASS (MICROSTEGIUM VINNUEM)
c. JAPANESE BARBERRY (BERBERIS THUNBERGII)


3. MECHANICAL METHODS ARE RECOMMENDED FOR REMOVAL OF INVASIVE SPECIES SPECIMENS TO AVOID IMPACTS TO NEARBY NATIVE SPECIES FROM SPRAYED HERBICIDES. INVASIVE SPECIES CONTROL SHALL GENERALLY BE COMPLETED IN ACCORDANCE WITH THE FOLLOWING PROCEDURES:

a. SMARTWEED CAN BE PULLED FROM THE SOIL, PREFERABLY BEFORE IT FLOWERS AND SETS SEEDS. THE WEED WILL SLIDE OUT MOST EASILY IF PULLED WHEN THE SOIL IS WET. GRASS THE WEED AS CLOSE TO THE SOIL LINE AS POSSIBLE. IF THE WEEDS BREAK OFF AT THE CROWN, SLIP A DANDELION WEEDEER UNDER THE WEED, PRY AND TWIST WHILE PULLING.


b. STILTGRASS CAN BE PULLED FROM THE SOIL, PREFERABLY BEFORE IT FLOWERS AND SETS SEEDS. STILTGRASS CAN ALSO BE CUT WITH A WEED WHACKER. CUTTING SHALL OCCUR LATE IN THE SEASON TO AVOID REGROWTH. CUTTING SHOULD OCCUR BEFORE FLOWERING AND SEEDING TO PREVENT SEED PRODUCTION. CUTTING TOO EARLY IN THE SUMMER WILL STIMULATE REGROWTH AND FLOWERING EARLIER THAN NORMAL. A SECOND CUTTING WOULD BE NEEDED TO PREVENT SEED PRODUCTION.

c. BARBERRY CAN BE REMOVED BY PULLING OR DIGGING IN EARLY SPRING. SMALL PLANTS CAN BE PULLED BY HAND. CUTTING AND TREATMENT OF THE STUMP WITH AN HERBICIDE MAY BE NECESSARY FOR LARGER SPECIMENS.


d. DEPENDING ON THE SIZE AND QUANTITY, REMOVED SPECIMENS SHALL BE BAGGED IN BLACK PLASTIC AND LEFT IN THE SUN TO "COOK" OR THOROUGHLY DRIED ON AN IMPERVIOUS SURFACE FOR SEVERAL WEEKS PRIOR TO DISPOSAL AT AN APPROVED LOCATION. CARE SHOULD BE TAKEN TO AVOID SEED DISPERSAL DURING THESE PROCESSES.

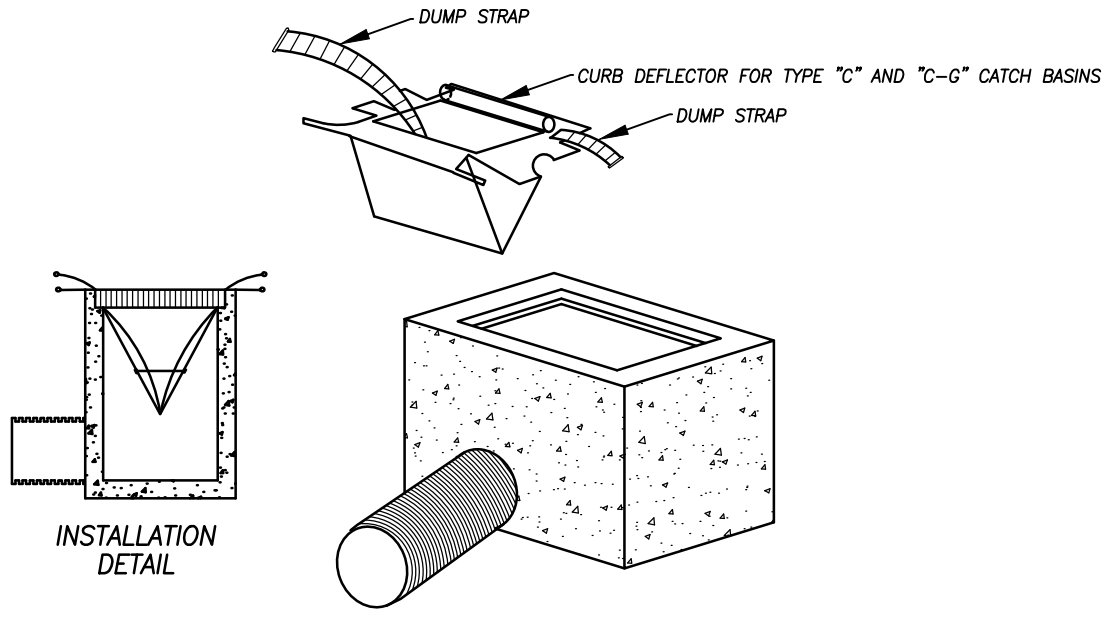


INLET SEDIMENT CONTROL DEVICE
NOT TO SCALE

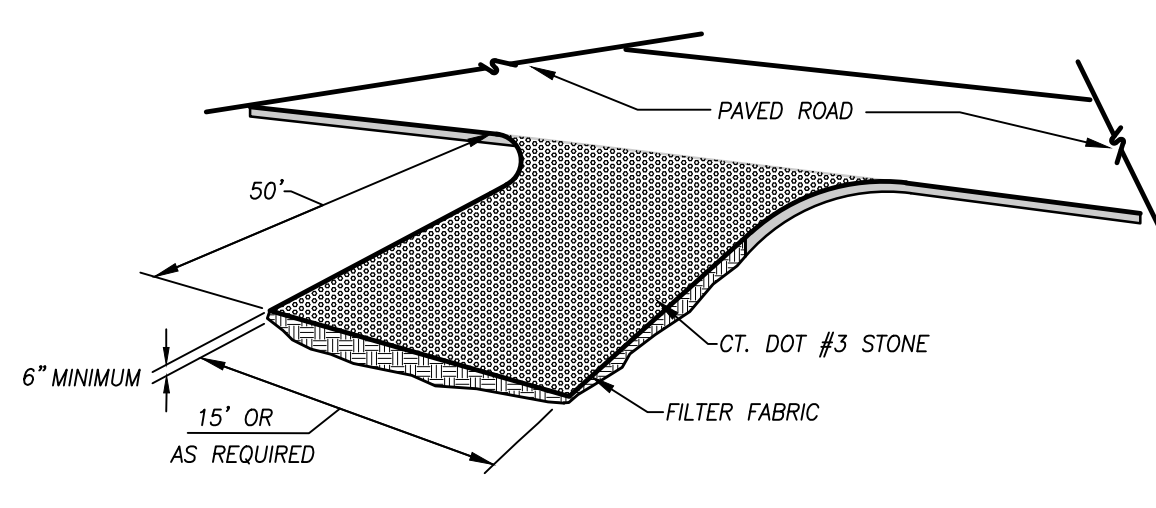


STRAW BALE CHECK DAM
NOT TO SCALE

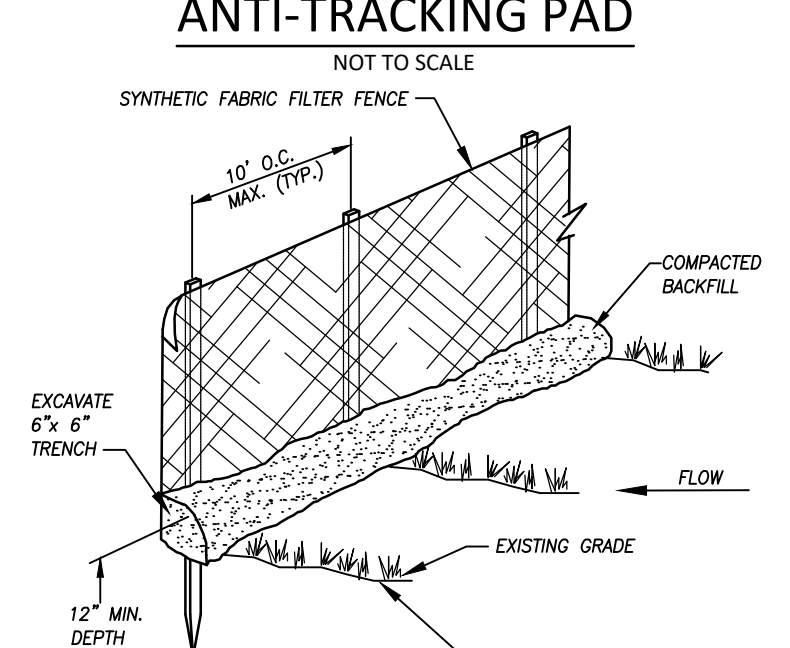


ANTI-TRACKING PAD
NOT TO SCALE

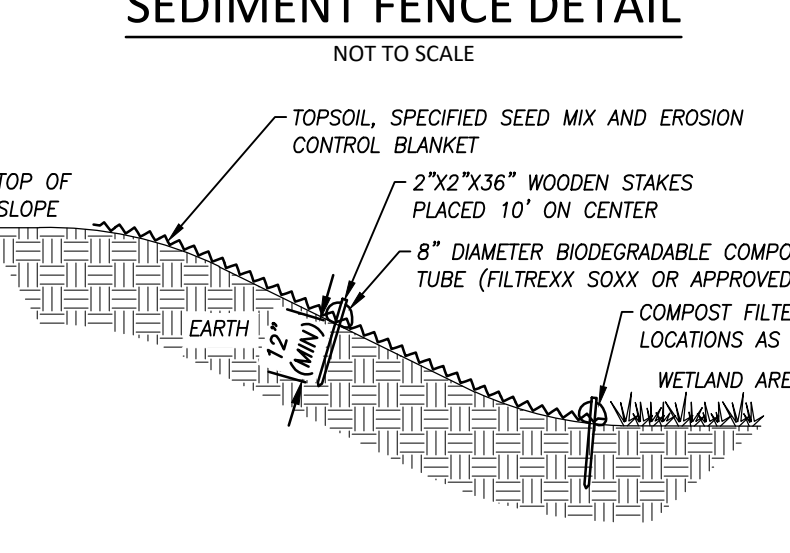

SEDIMENT FENCE DETAIL
NOT TO SCALE

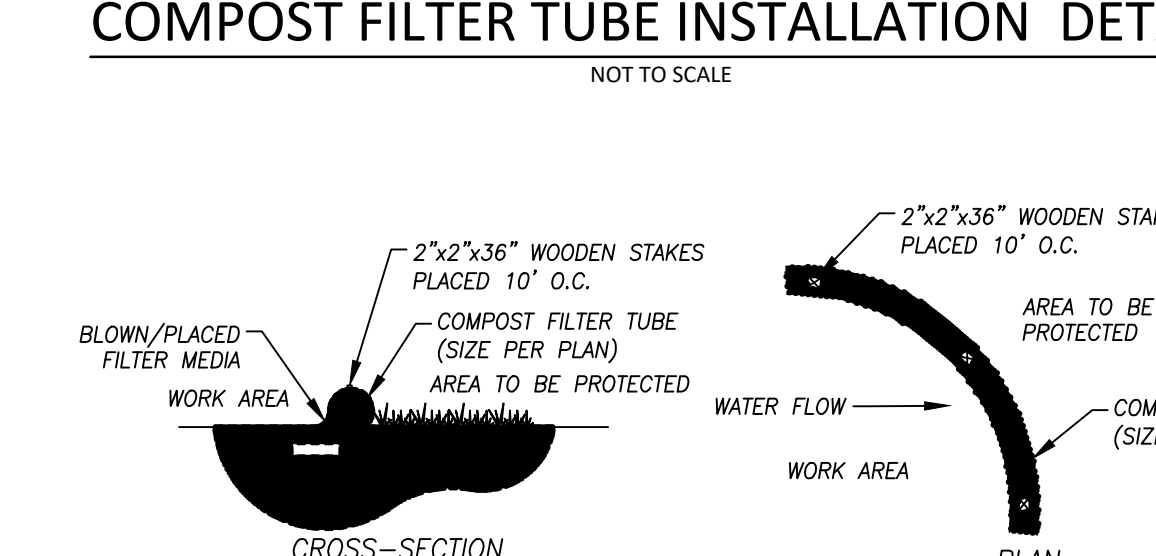


COMPOST FILTER TUBE INSTALLATION DETAIL
NOT TO SCALE

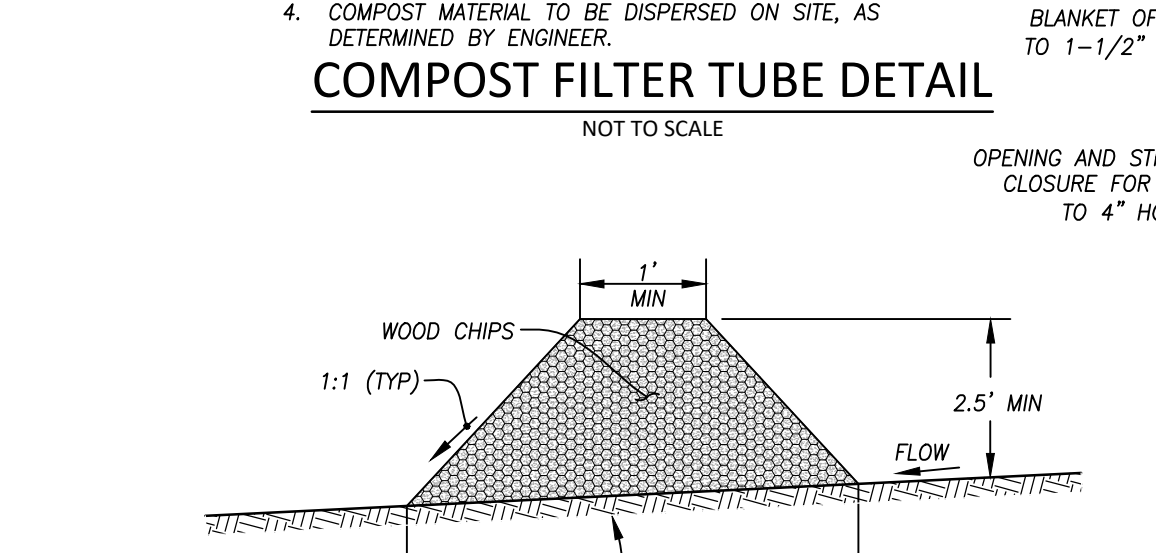


COMPOST FILTER TUBE DETAIL
NOT TO SCALE




WOOD CHIP BERM DETAIL
NOT TO SCALE

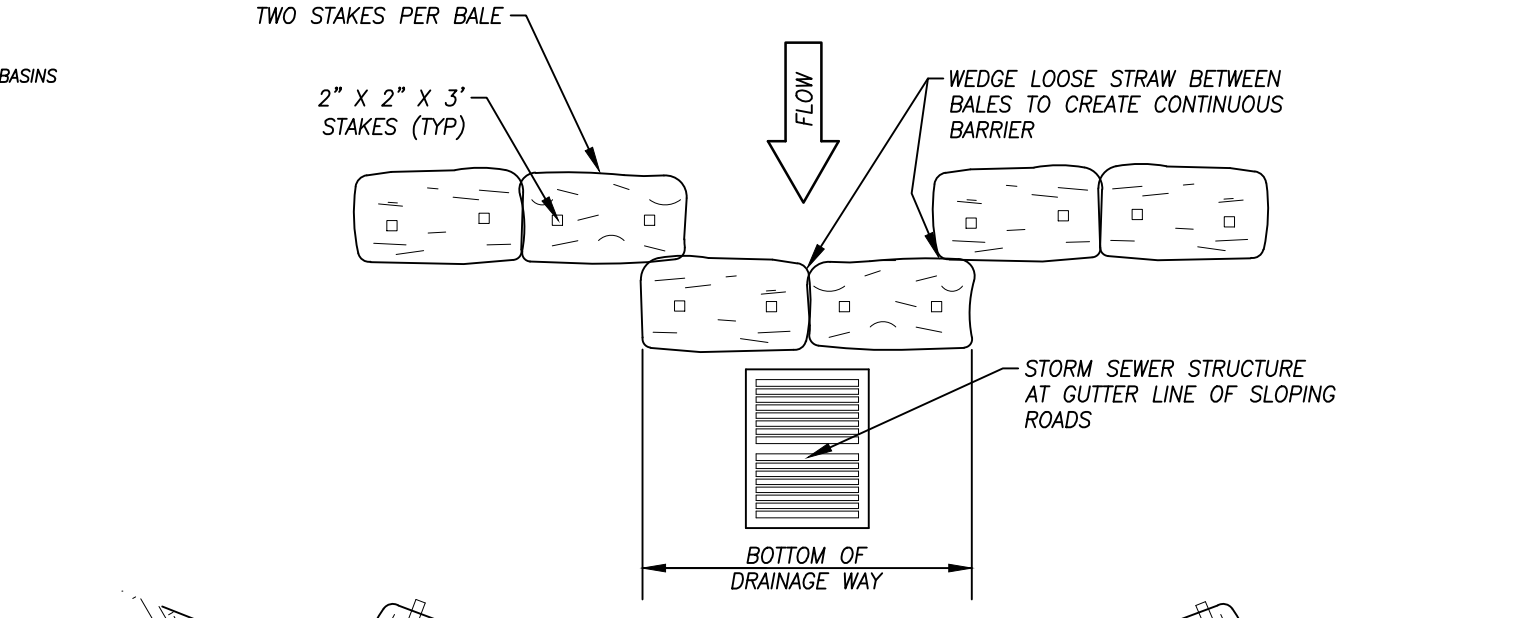


STRAW BALE CHECK DAM
NOT TO SCALE

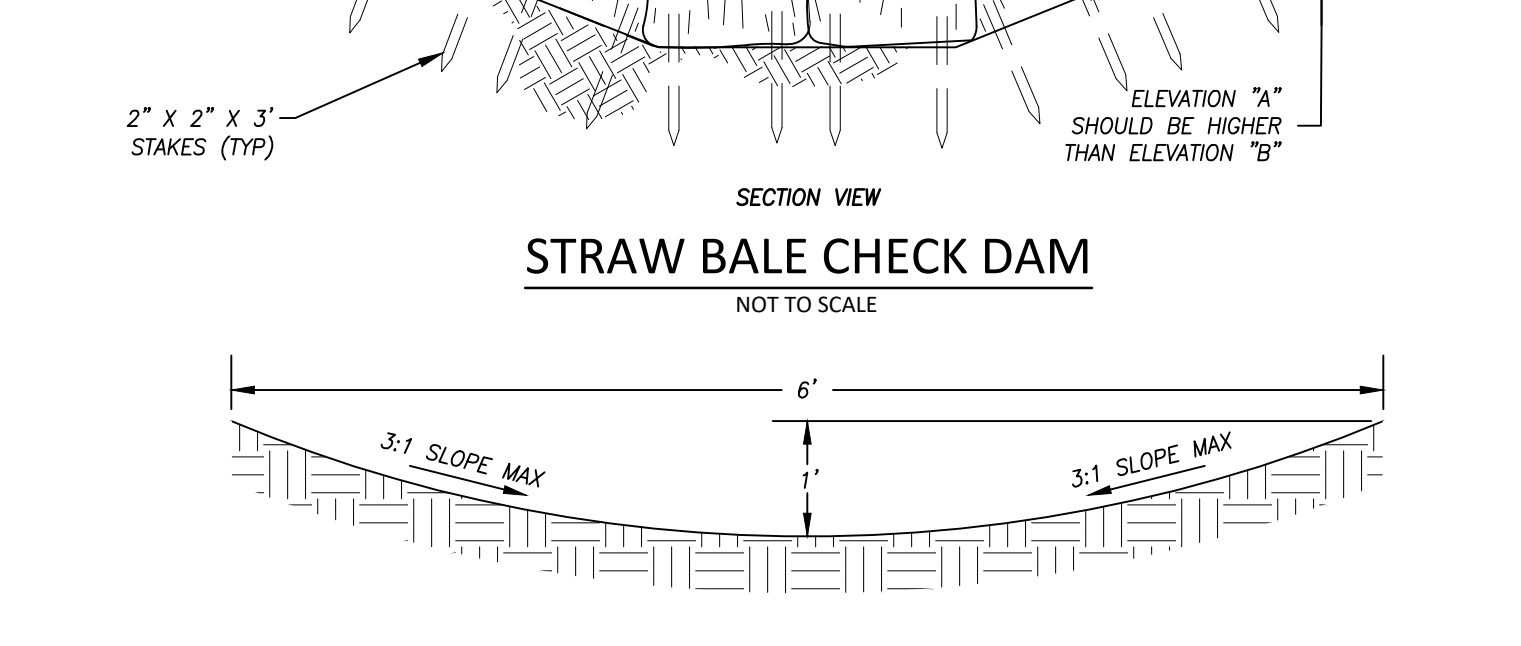


DIVERSION SWALE DETAIL
NOT TO SCALE

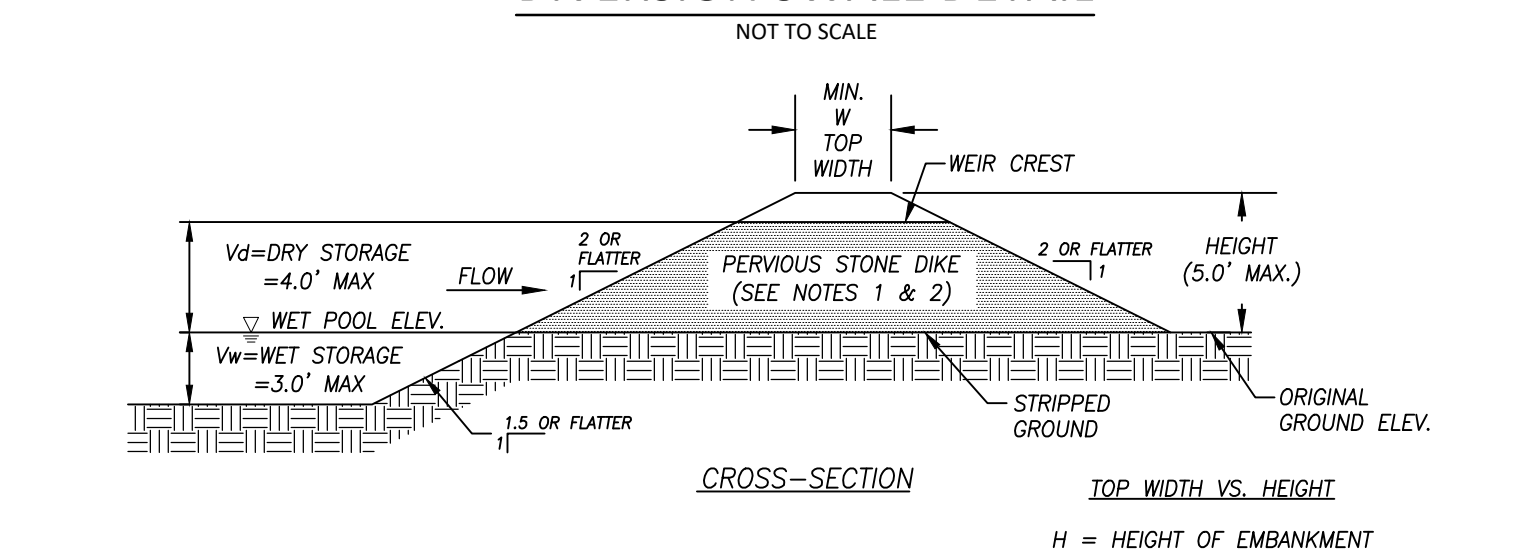


TYPICAL PUMP SETTLING BASIN DETAIL
NOT TO SCALE

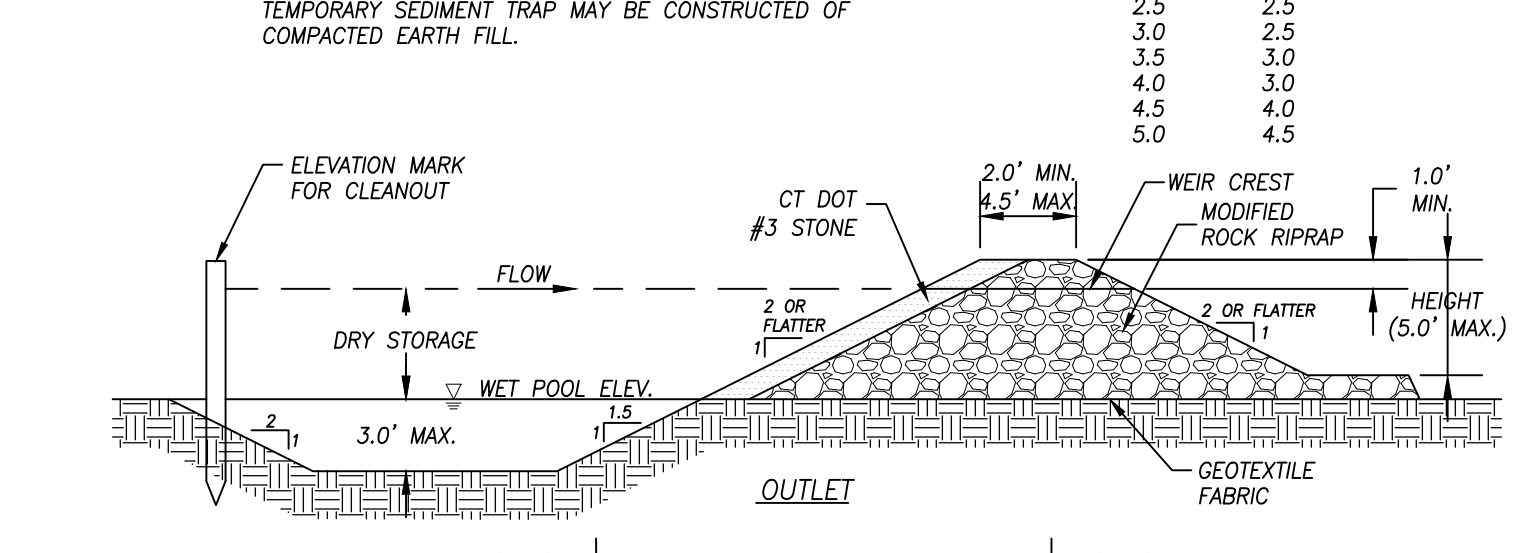


TYPICAL PUMP INTAKE DETAIL
NOT TO SCALE

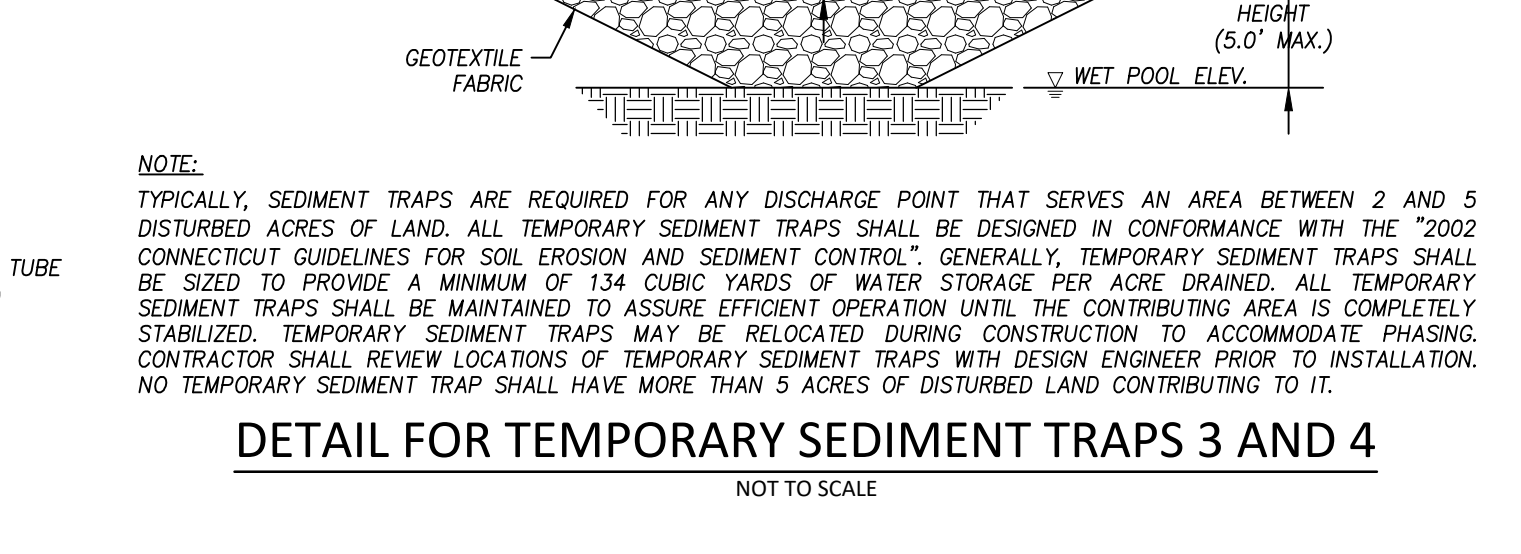


DETAIL FOR TEMPORARY SEDIMENT TRAPS 3 AND 4
NOT TO SCALE

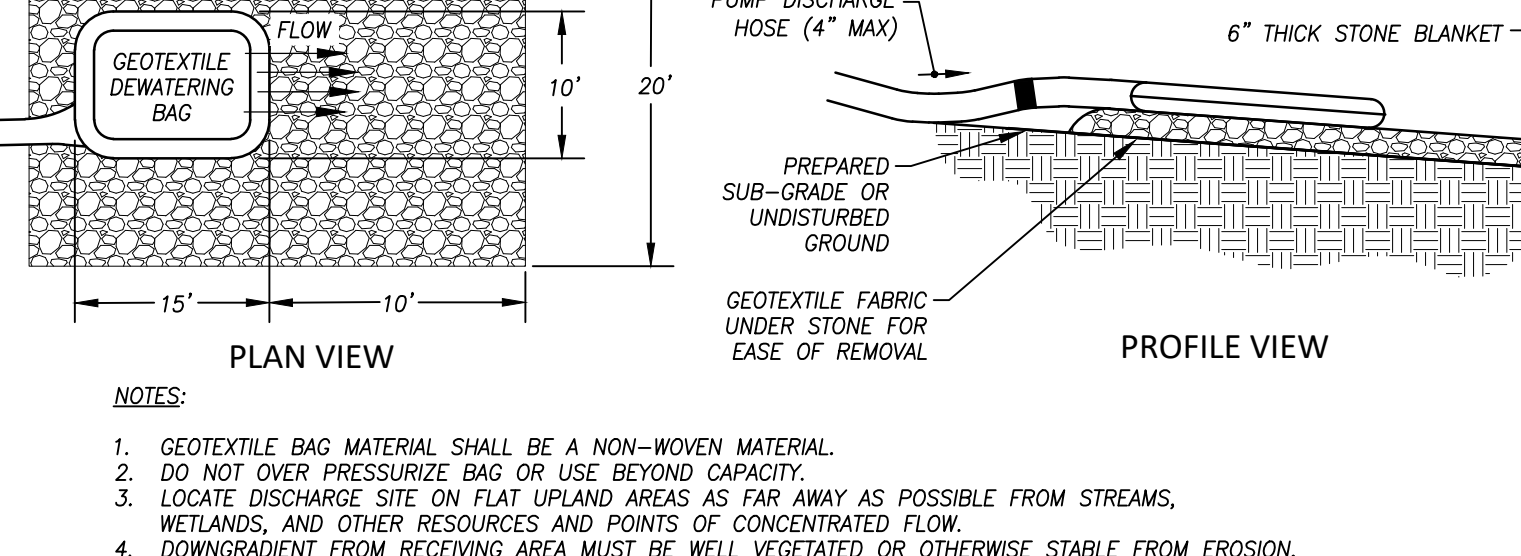


GEOTEXTILE DEWATERING BAG
NOT TO SCALE

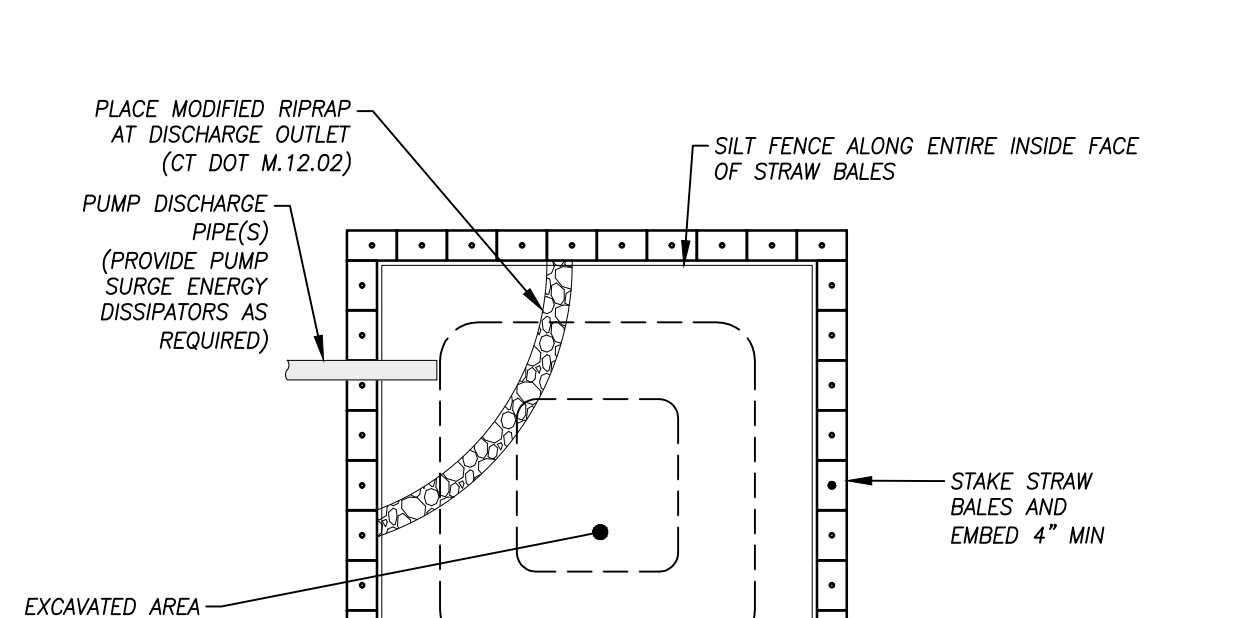


TYPICAL PUMP SETTLING BASIN DETAIL
NOT TO SCALE

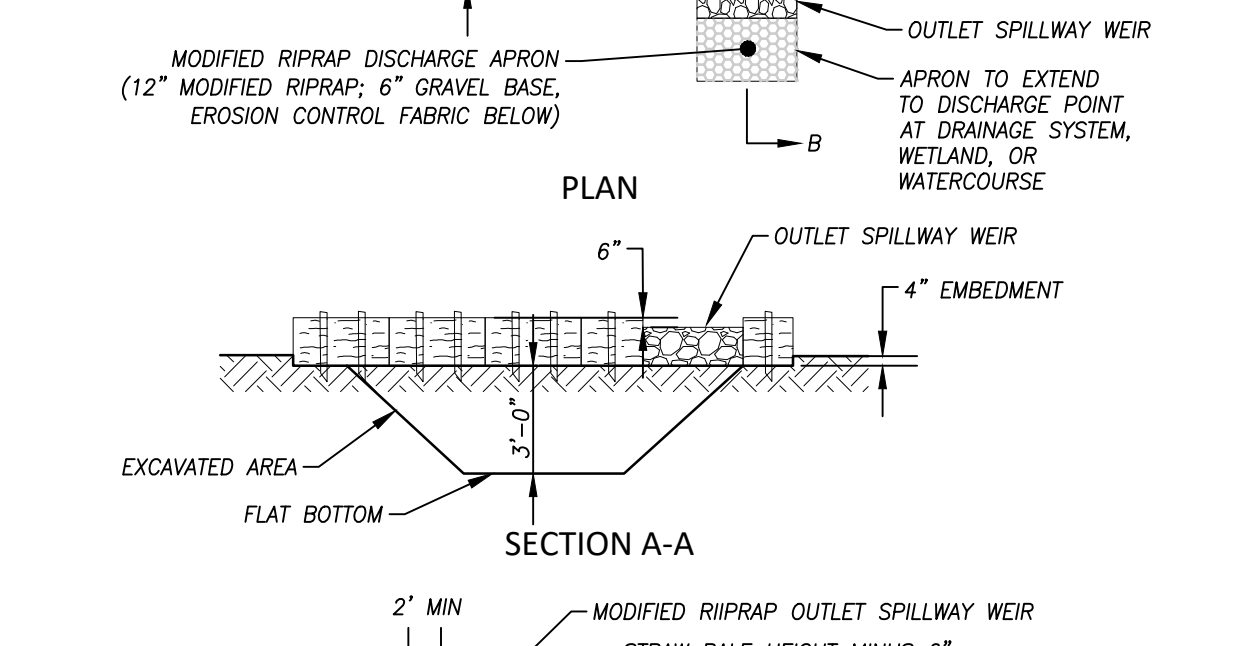


TYPICAL PUMP INTAKE DETAIL
NOT TO SCALE

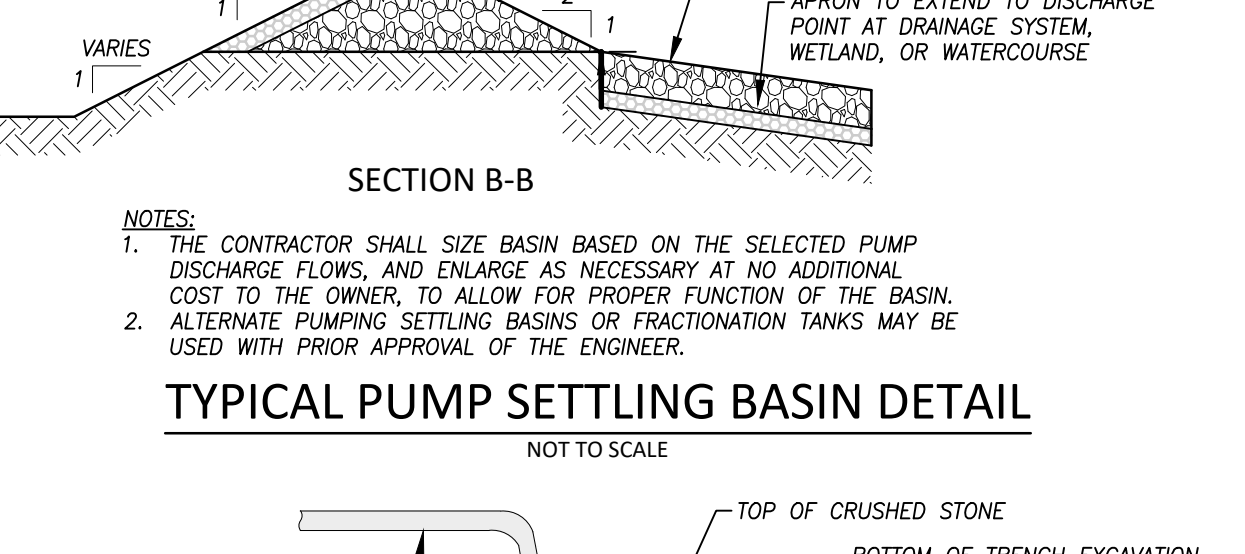


WATER BAR DETAIL
NOT TO SCALE

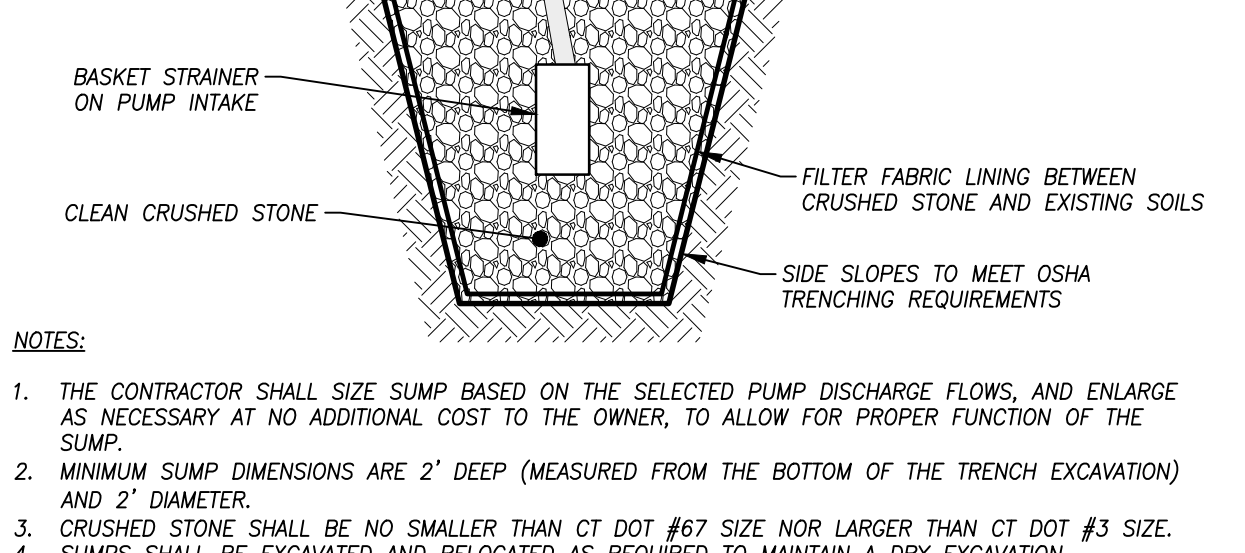

WATER BAR DETAIL
NOT TO SCALE

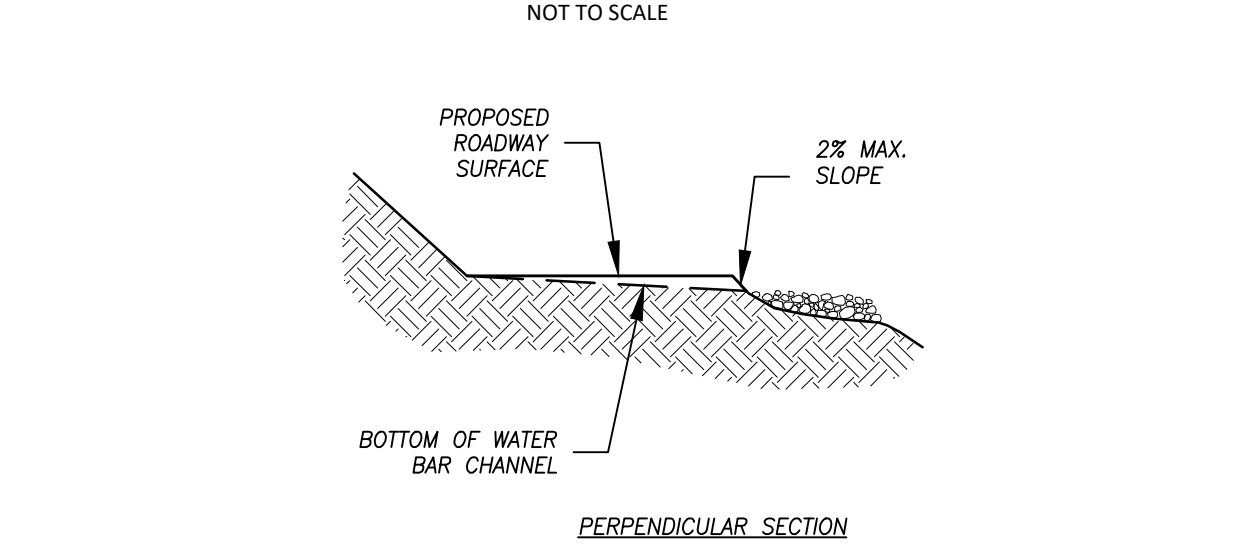

WATER BAR DETAIL
NOT TO SCALE

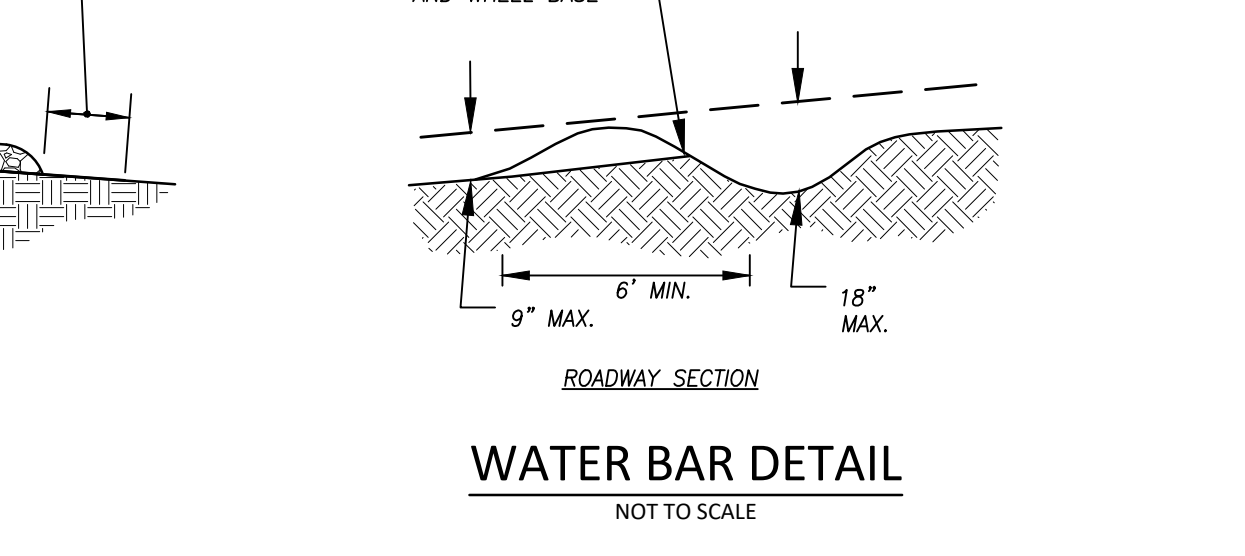

WATER BAR DETAIL
NOT TO SCALE

PLAN NOTES
1. SEE COVER SHEET FOR ENGINEER AND SURVEYOR SIGNATURES AND SEALS.
2. SEE SHEET 2 FOR LEGEND & ABBREVIATIONS.

GENERAL NOTES

- THE PROJECT SITE IS PART OF A MIXED USE DEVELOPMENT WITHIN THE MUDD ZONE. THE PROPOSED DEVELOPMENT INCLUDES THE EXTENSION OF EDGEWATER CIRCLE. THE PROJECT IS PART OF THE MIXED USE PHASED CONSTRUCTION OF THE EDGEWATER HILL MASTER PLAN DEVELOPMENT DATED 2012.
- SUBJECT IS ENTIRELY WITHIN FLOOD ZONE X (AREAS OF MINIMAL FLOOD HAZARD) IN ACCORDANCE WITH FEMA FIRM PANEL NUMBER 080703C. EFFECTIVE DATE 8/29/2008.
- THE PROPOSED DEVELOPMENT WILL BE SERVED BY PUBLIC WATER, GAS AND SANITARY SEWER.
- ALL PROPOSED UTILITY INFRASTRUCTURE SHALL BE INSTALLED UNDERGROUND UNLESS SPECIFICALLY NOTED HEREIN IN ACCORDANCE WITH UTILITY COMPANY REQUIREMENTS.
- ALL EXISTING UTILITY INFORMATION SHOWN HEREIN IS APPROXIMATE ONLY AND SHALL BE VERIFIED BY THE CONTRACTOR PRIOR TO COMMENCEMENT OF THE SITE WORK. THE ENGINEER MAKES NO STATEMENT, WARRANTY, OR GUARANTEE TO THE LOCATION, SIZE, TYPE, QUANTITY OR CONDITION OF THE UTILITIES SHOWN HEREIN.
- IT IS THE RESPONSIBILITY OF THE CONTRACTOR TO CONTACT THE "CALL BEFORE YOU DIG" ORGANIZATION AT 1-800-922-4455 A MINIMUM OF THREE (3) BUSINESS DAYS PRIOR TO COMMENCEMENT OF ANY SITE WORK OR SITE DISTURBANCE ON OR ADJACENT TO THE PROJECT SITE.
- ALL MATERIALS, INSTALLATIONS, CONSTRUCTION AND WORKMANSHIP SHALL BE IN ACCORDANCE WITH THE EAST HAMPTON SITE PLAN STANDARDS, THE TOWN OF EAST HAMPTON STREET STANDARDS, EAST HAMPTON WPCA SPECIFICATIONS AND THE CONNECTICUT DEPARTMENT OF TRANSPORTATION STANDARD SPECIFICATIONS FOR ROADS, BRIDGES, FACILITIES AND INCIDENTAL CONSTRUCTION FORM B17 AS AMENDED.
- ALL TRAFFIC SIGNAGE, MARKINGS, LOCATIONS AND INSTALLATIONS SHALL CONFORM TO THE MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES (MUTCD), LATEST EDITION.
- IT IS THE RESPONSIBILITY OF THE CONTRACTOR TO OBTAIN, REVIEW AND ADHERE TO ALL REQUIREMENTS AND ANY CONDITIONS OF APPROVAL ASSOCIATED WITH THE PROJECT FROM THE TOWN OF EAST HAMPTON, CONNECTICUT DEPARTMENT OF ENERGY AND ENVIRONMENTAL PROTECTION AND ALL CUSTODIAL UTILITY COMPANIES.
- IT IS THE RESPONSIBILITY OF THE CONTRACTOR TO OBTAIN ALL PERMITS, BONDING AND INSURANCE REQUIRED BY THE TOWN OF EAST HAMPTON AND ALL CUSTODIAL UTILITY COMPANIES.
- IT IS THE RESPONSIBILITY OF THE CONTRACTOR TO PROVIDE ALL NECESSARY TRAFFIC CONTROL BARRICADES, SIGNAGE, PERSONNEL AND OTHER EQUIPMENT/ITEMS REQUIRED TO MAINTAIN SAFE AND FULL PUBLIC AND EMERGENCY ACCESS DURING ALL PHASES OF THIS PROJECT.
- ALL HANDICAP ACCESS ROUTES SHALL BE CONSTRUCTED IN STRICT CONFORMANCE WITH THE AMERICAN DISABILITIES ACT (ADA) CODES, SPECIFICATIONS, RECOMMENDATIONS AND REQUIREMENTS.
- ALL SITEWORK AND EROSION CONTROL MEASURES SHALL BE IN ACCORDANCE WITH THE ALL LOCAL AND STATE PERMITS INCLUDING THE CTDEEP GENERAL PERMIT FOR THE DISCHARGE OF WASTEWATERS FROM CONSTRUCTION ACTIVITIES.
- ANY DISCREPANCIES BETWEEN DESIGN PLAN SHEETS, FIELD CONDITIONS, NOTES AND SPECIFICATIONS OR SITE CONDITIONS SHALL BE BROUGHT TO THE ATTENTION OF THE DESIGN ENGINEER PRIOR TO THE START OF CONSTRUCTION.

DEMOLITION & MOBILIZATION NOTES

- THE CONTRACTOR SHALL SECURE ALL NECESSARY BUILDING PERMITS INCLUDING BUT NOT LIMITED TO CLEARING, STEWAGE, TEMPORARY AND PERMANENT POWER, EXCAVATION, SOIL EROSION AND SEDIMENT CONTROL, AND ALL OTHER APPLICABLE PERMITS.
- ALL PAVEMENT REMOVAL SHALL BE SAWCUT SMOOTH WITH TRUE ALIGNMENT.
- THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE REMOVAL OF ALL SURPLUS MATERIAL OFF-SITE. ANY ITEMS/MATERIALS TO BE SAVED FOR FUTURE RE-USE SHALL BE APPROPRIATELY STOCKPILED ON SITE AT A PRE-APPROVED LOCATION AND PROTECTED WITH APPROPRIATE EROSION CONTROL MEASURES.
- IT IS THE RESPONSIBILITY OF THE CONTRACTOR FOR PROVIDING AND INSTALLING ADEQUATE BARRICADES, FENCING, SIGNAGE AND SITE SECURITY DURING WORKING HOURS. THE CONTRACTOR SHALL EMPLOY THE APPROPRIATE MEANS TO ENSURE THAT PUBLIC SAFETY AND PROJECT SECURITY IS APPROPRIATELY MAINTAINED THROUGHOUT THE PROJECT LIFE.
- THE CONTRACTOR SHALL BARRICADE AND APPROPRIATELY SIGN ALL EXCAVATED TRENCHES, TEST HOLES AND ALL OTHER EXCAVATIONS TO HORIZONTAL FALLS AND UNAUTHORIZED ENTRY DURING ALL ASPECTS OF THE WORK. THE CONTRACTOR SHALL BE RESPONSIBLE FOR PERFORMING ALL DEMOLITION, GRADING AND RELATED SITE WORK SUCH THAT NO UNREASONABLE DUST, DEBRIS OR DAMAGE OCCURS TO ADJACENT PROPERTIES OR THE GENERAL PUBLIC.

GRADING NOTES

- THE CONTRACTOR SHALL REMOVE ALL UNSUITABLE MATERIALS DURING CONSTRUCTION AND UTILITY INSTALLATIONS TO THE SATISFACTION OF THE ENGINEER AND/OR TOWN OFFICIALS.
- THE SITE SHALL BE GRADED USING STANDARD CONSTRUCTION PRACTICES. EROSION CONTROL BLANKETS, AS APPROVED BY THE ENGINEER, SHALL BE USED ON ALL SLOPES EQUAL TO OR STEEPER THAN 3 HORIZONTAL TO 1 VERTICAL OR AS PRESCRIBED BY THE ENGINEER. INSTALLATION SHALL BE IN STRICT CONFORMANCE WITH THE MANUFACTURER'S INSTRUCTIONS AND SPECIFICATIONS.
- AREAS TO BE USED FOR STORMWATER MANAGEMENT SHALL NOT BE EXCAVATED TO FULL DEPTH. A MINIMUM OF TWO (2) FEET OF NATURALLY OCCURRING SOIL SHALL REMAIN IN PLACE UNTIL SUCH TIME THAT FINAL GRADING IS APPROPRIATE.
- ALL DISTURBED AREAS ARE TO BE PERMANENTLY STABILIZED AS SOON AS FEASIBLE. WHERE PERMANENT STABILIZATION IS NOT FEASIBLE, TEMPORARY MEASURES FOR STABILIZATION AS APPROVED BY THE ENGINEER SHALL BE INCORPORATED.
- ALL PROPOSED GRADES DEPICTED HEREIN REPRESENT FINAL SURFACE ELEVATION OF PAVEMENT, CONCRETE, STONE OR TOPSOIL UNLESS OTHERWISE NOTED.
- ALL GRADED SURFACES SHALL BE GRADED SUCH THAT THE FINAL GRADE RESULTS IN POSITIVE DRAINAGE FROM ALL SURFACE POINTS.
- FILL EMBANKMENTS SHALL BE CONSTRUCTED IN ACCORDANCE WITH SECTIONS 2.02.03.5, 6, 7 AND 11 OF CT DOT FORM B17. EMBANKMENTS SHALL BE CONSTRUCTED IN LOOSE LIFTS NOT EXCEEDING 12-INCHES AND COMPACTED TO 95% MAXIMUM DRY DENSITY. FINAL SLOPES SHALL BE TRACKED WITH CLEATED TRACKED EQUIPMENT PRIOR TO THE INSTALLATION OF TOPSOIL.
- FILL WITHIN THE ZONE OF INFLUENCE OF THE FOUNDATIONS OF THE PROPOSED BUILDINGS SHALL MEET THE REQUIREMENTS OF THE GEOTECHNICAL/STRUCTURAL ENGINEER.

REMOVAL OF LEDGE ROCK

- CONTRACTOR SHALL OBTAIN BLASTING PERMIT FROM THE TOWN OF EAST HAMPTON PRIOR TO ANY BLASTING ACTIVITIES.
- ALL EXPLOSIVE DEMOLITION SHALL BE PERFORMED IN STRICT ACCORDANCE WITH ALL APPLICABLE LOCAL, STATE AND FEDERAL REGULATIONS AND ORDINANCES. NO EXPLOSIVE DEMOLITION SHALL TAKE PLACE BETWEEN THE HOURS OF 5:00 PM AND 7:00 AM ON ANY DAY, AND NO EXPLOSIVE DEMOLITION SHALL OCCUR ON SUNDAYS.
- THE CONTRACTOR SHALL BE RESPONSIBLE FOR PERFORMING A FULL AND COMPLETE PRE-BLAST SURVEY OF ANY AND ALL PROPERTIES THAT MAY BE AFFECTED BY EXPLOSIVE DEMOLITION ACTIVITIES. THE CONTRACTOR SHALL BE RESPONSIBLE FOR PROVIDING ADEQUATE PROTECTION OF ANY PART OF ANY PROPERTY THAT MAY BE AFFECTED BY EXPLOSIVE DEMOLITION ACTIVITIES, AND SHALL BE RESPONSIBLE FOR REPAIR AND/OR REPLACEMENT OF ANY DAMAGED PORTION OF SAID PROPERTIES.
- THE CONTRACTOR SHALL BE RESPONSIBLE FOR REPAIRING, RESTORING AND GENERAL MAINTENANCE OF ALL ADJACENT AND ARBITING PROPERTIES, STRUCTURES AND PORTIONS THEREOF THAT MAY BE DAMAGED OR OTHERWISE AFFECTED BY THE CONSTRUCTION/DEMOLITION ACTIVITIES ON THIS PROJECT. THE CONTRACTOR'S RESPONSIBILITY SHALL EXTEND TO AT LEAST THE POINT WHERE THE PROPERTY/STRUCTURE IS FULLY RESTORED, REPLACED OR ESTABLISHED AND/OR STABILIZED. ALL EFFORTS, MATERIALS AND INSTALLATION SHALL BE PAID FOR BY THE CONTRACTOR.

LANDSCAPE NOTES


- ALL DISTURBED AREAS NOT COVERED BY BUILDINGS, DRIVEWAYS, ROADWAYS, WALKWAYS, ETC. SHALL BE GRADED AND STABILIZED AS FOLLOWS:
 - PLACE A MINIMUM OF 4-INCHES OF TOPSOIL IN ALL DISTURBED AREAS. APPLY LIMESTONE AND FERTILIZER IN ACCORDANCE WITH SOIL TEST RESULTS AND RECOMMENDATIONS.
 - APPLY SPECIFIED SEED MIXTURE AT RECOMMENDED RATE. SEE EROSION AND SEDIMENTATION CONTROL NOTES.
 - APPLY STRAW MULCH ON ALL SEEDED AREAS.
- SEEDING SHALL TAKE PLACE BETWEEN APRIL 1 AND JUNE 15, OR AUGUST 15 AND OCTOBER 1. SEEDING DURING THESE TIME FRAMES INCLUDE APPLICATION OF STRAW MULCH AT A RATE OF 2 BALES PER 1000 SF. IF THE SEEDING IS APPLIED OUTSIDE OF THESE TIME FRAMES, THE AREAS SHALL BE STABILIZED WITH STRAW MULCH AT A RATE OF 90 LBS PER 1000 SF.
- GRADED AREAS 3H:1V AND STEEPER SHALL BE SEEDED WITH THE SPECIFIED SEED MIX OR EQUAL AND STABILIZED BY AN EROSION BLANKET.
- MULCHING SHALL BE APPLIED IN THE FOLLOWING MANNER: SPREAD MULCH BY HAND OR MULCH BLOWER. PUNCH MULCH INTO SOIL SURFACE WITH TRACK MACHINE APPROXIMATELY 2"-3" TO ANCHOR INTO SOIL.
- STREET TREES SHALL BE BALLED AND BURLAPPED WITH A MINIMUM 2" CALIBER AND MINIMUM 6-FOOT HEIGHT.
- ALL MATERIALS AND CONSTRUCTION METHODS ARE TO CONFORM TO THE REQUIREMENTS OF THE CT ASSOCIATION OF LANDSCAPE CONTRACTORS SPECIFICATIONS AND THE AMERICAN NURSERYMAN'S STANDARDS FOR NURSERY STOCK.
- ALL STAKING OR GUYING IS TO BE DONE IMMEDIATELY AFTER PLANTING, BUT IN NO CASE MORE THAN 24-HOURS AFTER PLANTING. AT COMPLETION OF MAINTENANCE PERIOD, REMOVE ALL STAKES, GUYS, FLAGS, TREE WRAP AND ANCHORS.
- WHEN ALL AREAS ARE STABILIZED, REMOVE ALL EROSION AND SEDIMENT CONTROL DEVICES AND DISPOSE OF ALL ACCUMULATED SEDIMENTS AT A PRE-APPROVED LOCATION.

STORMWATER BASIN NOTES


- THE STORMWATER MANAGEMENT BASINS SHALL BE STABILIZED PRIOR TO THE DISCHARGE OF STORMWATER INTO THE BASIN. THE BASIN IS TO BE CONSTRUCTED DURING THE DRY SEASON, IF PRACTICAL.
- ALL EROSION CONTROL MEASURES ARE TO BE THE FIRST ITEM OF CONSTRUCTION AND MAINTAINED UNTIL ALL DISTURBED AREAS ARE PERMANENTLY STABILIZED.
- THE EXISTING TOPSOIL IS TO BE REMOVED AND STOCKPILED FOR RE-USE IN FINAL STABILIZATION OF THE BASINS.
- UNTIL SUCH TIME AS THE FINAL GRADING FOR THE BASINS IS TO BE CONDUCTED, THE USE OF HEAVY MACHINERY AND ANY OTHER ACTIVITY THAT MAY COMPACT THE NATURALLY OCCURRING SOILS IS TO BE AVOIDED. SHOULD THE BASIN(S) BE UTILIZED FOR TEMPORARY SEDIMENT TRAPS DURING CONSTRUCTION, A MINIMUM OF TWO (2) VERTICAL FEET OF NATURALLY OCCURRING SOIL ABOVE FINAL GRADE OF THE BASIN SHALL BE MAINTAINED UNTIL SUCH TIME AS ALL UPGRADED AREAS ARE PERMANENTLY STABILIZED AND THE BASIN MAY BE CONSTRUCTED.
- IT IS THE RESPONSIBILITY OF THE CONTRACTOR TO PERFORM ALL REQUIRED MAINTENANCE UNTIL ALL CONSTRUCTION IS ACCEPTED BY THE OWNER.
- SILT FENCING, STRAW BALES OR OTHER EROSION BARRIER IS TO BE EMPLOYED IN A CONTINUOUS ROW WITHIN THE BASIN PERPENDICULAR TO THE BASIN INFLOW TO PREVENT ANY FLOW CHANNELIZATION PRIOR TO ADEQUATE VEGETATION BEING ESTABLISHED WITHIN THE BASIN.
- STORMWATER BASINS SHALL BE VEGETATED AND STABILIZED PRIOR TO FINAL PAVING AND REMOVAL OF CATCH BASIN INLET PROTECTION AND CURB DEFLECTORS.

GENERAL UTILITY NOTES


- THE CONTRACTOR SHALL IMPLEMENT ALL APPLICABLE TOWN OF EAST HAMPTON AND STATE OF CONNECTICUT STANDARDS AND REGULATIONS. ALL SANITARY SEWER UTILITIES SHALL BE INSTALLED IN ACCORDANCE WITH THE LATEST APPLICABLE TOWN OF EAST HAMPTON WATER POLLUTION CONTROL AUTHORITY (WPCA) RULES, REGULATIONS AND SPECIFICATIONS. FOUNDATION DRAINS, SUMP PUMPS AND/OR ROOF LEADERS SHALL NOT DISCHARGE INTO THE SANITARY SEWER SYSTEM.
- ALL DRAINAGE STRUCTURES SHALL BE PRECAST CONCRETE WITH CAST IRON FRAME AND GRATES CAPABLE OF HANDLING H-20 LOADING.
- ALL DRAINAGE PIPE SHALL BE SMOOTH INTERIOR HIGH DENSITY POLYETHYLENE PIPE (HDPE) OR APPROVED EQUAL UNLESS OTHERWISE NOTED. ALL PIPE SHALL BE INSTALLED PER MANUFACTURER'S SPECIFICATIONS. A MINIMUM OF TWO FEET OF COVER SHALL BE PROVIDED OVER THE PIPE PRIOR TO ANY VEHICULAR TRAFFIC. ROOF LEADERS AND FOOTING DRAINS SHALL BE 6" (MIN.) SCHEDULE 40 PVC ASTM D1785. ROOF LEADERS SHALL BE DIRECTED TO THE PROPOSED SUBSURFACE INFILTRATION SYSTEMS. FOOTING DRAINS SHALL DAYLIGHT WHERE EVER FEASIBLE. WHERE DAYLIGHT IS NOT FEASIBLE, FOOTING DRAINS SHALL BE CONNECTED INTO THE FORMAL ROADWAY DRAINAGE SYSTEM.
- ROOF INFILTRATION SYSTEMS SHALL BE COMPRISED OF 8" DIAMETER PRECAST CONCRETE DRYWELLS. EACH SYSTEM WILL INCLUDE 12" OF CRUSHED STONE ON ALL SIDES, EACH SYSTEM WILL INCLUDE AN OVERFLOW RELIEF PIPE ALLOWING VOLUMES GREATER THAN THE STORAGE VOLUME TO BE RELEASED WITHOUT BACKING UP THE ROOF GUTTER LEADERS.
- LOCATIONS OF ALL TRANSFORMERS, UTILITY VAULTS AND PULL BOXES SHALL BE DETERMINED BY THE UTILITY AUTHORITY. ANY POTENTIAL UTILITY CONFLICT OR CHANGE SHALL BE REVIEWED, EVALUATED AND APPROVED BY THE OWNER AND OWNER'S REPRESENTATIVE PRIOR TO CONSTRUCTION.
- ALL FINAL UTILITY DEMANDS, SIZES AND OPTIMAL BUILDING ENTRY LOCATIONS, SITE LIGHTING, WIRING, UNDER SLAB UTILITY CONNECTIONS AND ALL OTHER UTILITY RELATED INFORMATION SHALL BE DETERMINED BY THE CUSTODIAL UTILITY COMPANIES.
- ALL WATER MAINS SHALL CONFORM TO THE REQUIREMENTS AND SPECIFICATIONS OF THE CONNECTICUT WATER COMPANY.
- ALL SANITARY SEWER RELATED WORK SHALL BE IN ACCORDANCE WITH THE REQUIREMENTS AND SPECIFICATIONS OF THE WATER POLLUTION CONTROL AUTHORITY. ALL STRUCTURES SHALL BE PRECAST CONCRETE WITH CAST IRON FRAMES AND GRATES CAPABLE OF HANDLING H-20 LOADINGS. ALL MAIN PIPE RUNS SHALL BE 8" DIAMETER SCHEDULE 40 PVC PIPE. ALL BUILDING SERVICES SHALL BE 6" DIAMETER SCHEDULE 40 PVC CONSTRUCTED AT A SLOPE NO LESS THAN 1/4" PER FOOT.
- ALL ELECTRIC, TELEPHONE, COMMUNICATIONS AND RELATED UTILITIES SHALL BE UNDERGROUND IN ACCORDANCE WITH ALL RULES AND REGULATIONS OF THE CUSTODIAL UTILITY COMPANY.
- ALL SANITARY SEWER RELATED WORK SHALL CONFORM TO THE EAST HAMPTON WPCA SPECIFICATIONS AND INSPECTION REQUIREMENTS FOR CONNECTION TO "PUBLIC SEWERS" INCLUDING BUT NOT LIMITED TO CONSTRUCTION DETAILS, CCTV SURVEY OF ALL NEW MAINS AND AS-BUILT SURVEY PLANS.

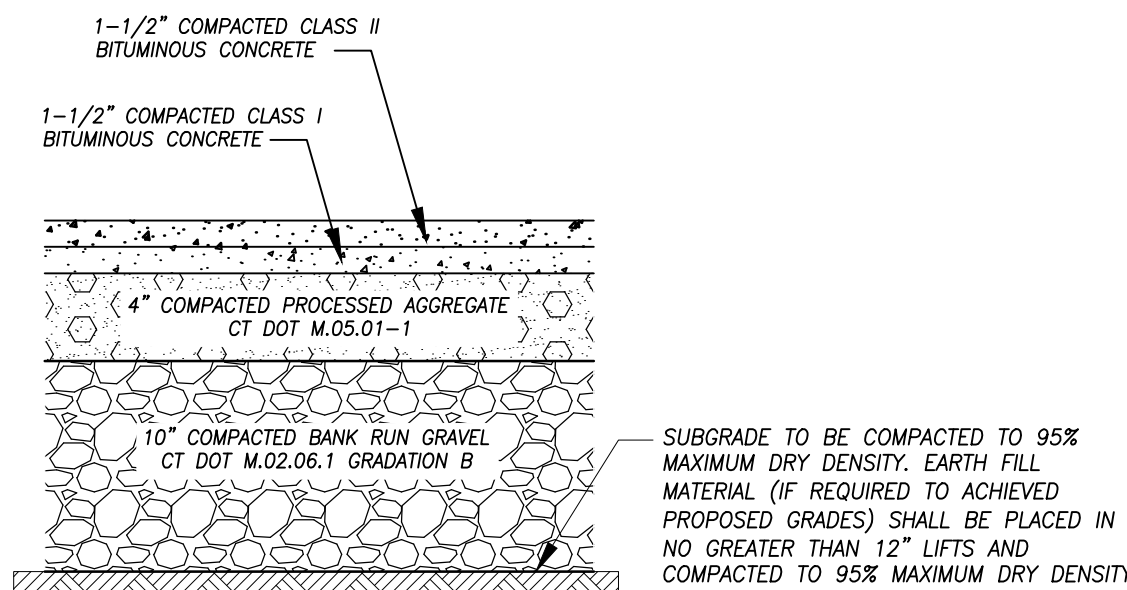


BITUMINOUS CONCRETE PAVEMENT DETAIL
NOT TO SCALE

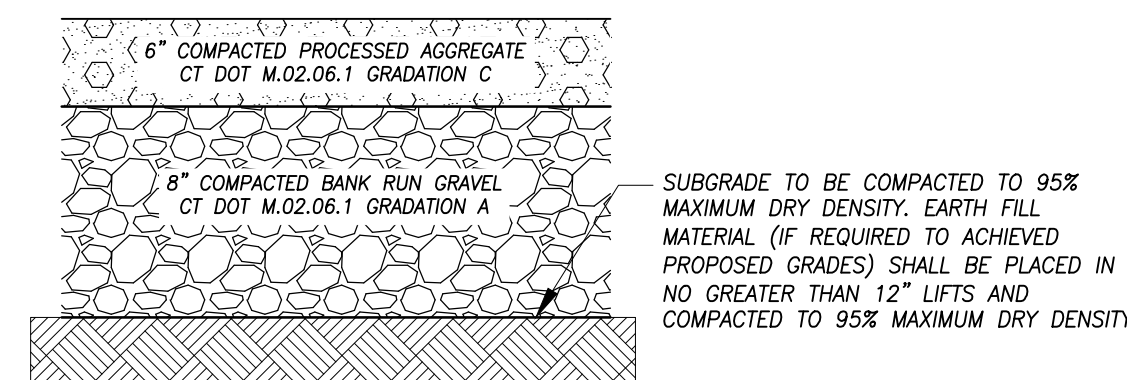


TRAFFIC BOUND GRAVEL SURFACE DETAIL
NOT TO SCALE

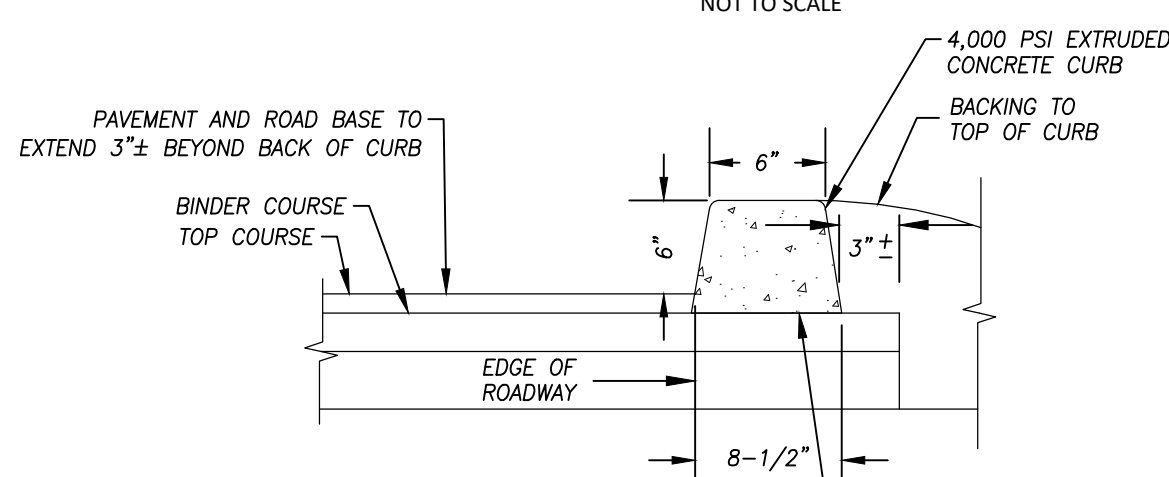


EXTRUDED CONCRETE CURB DETAIL
NOT TO SCALE

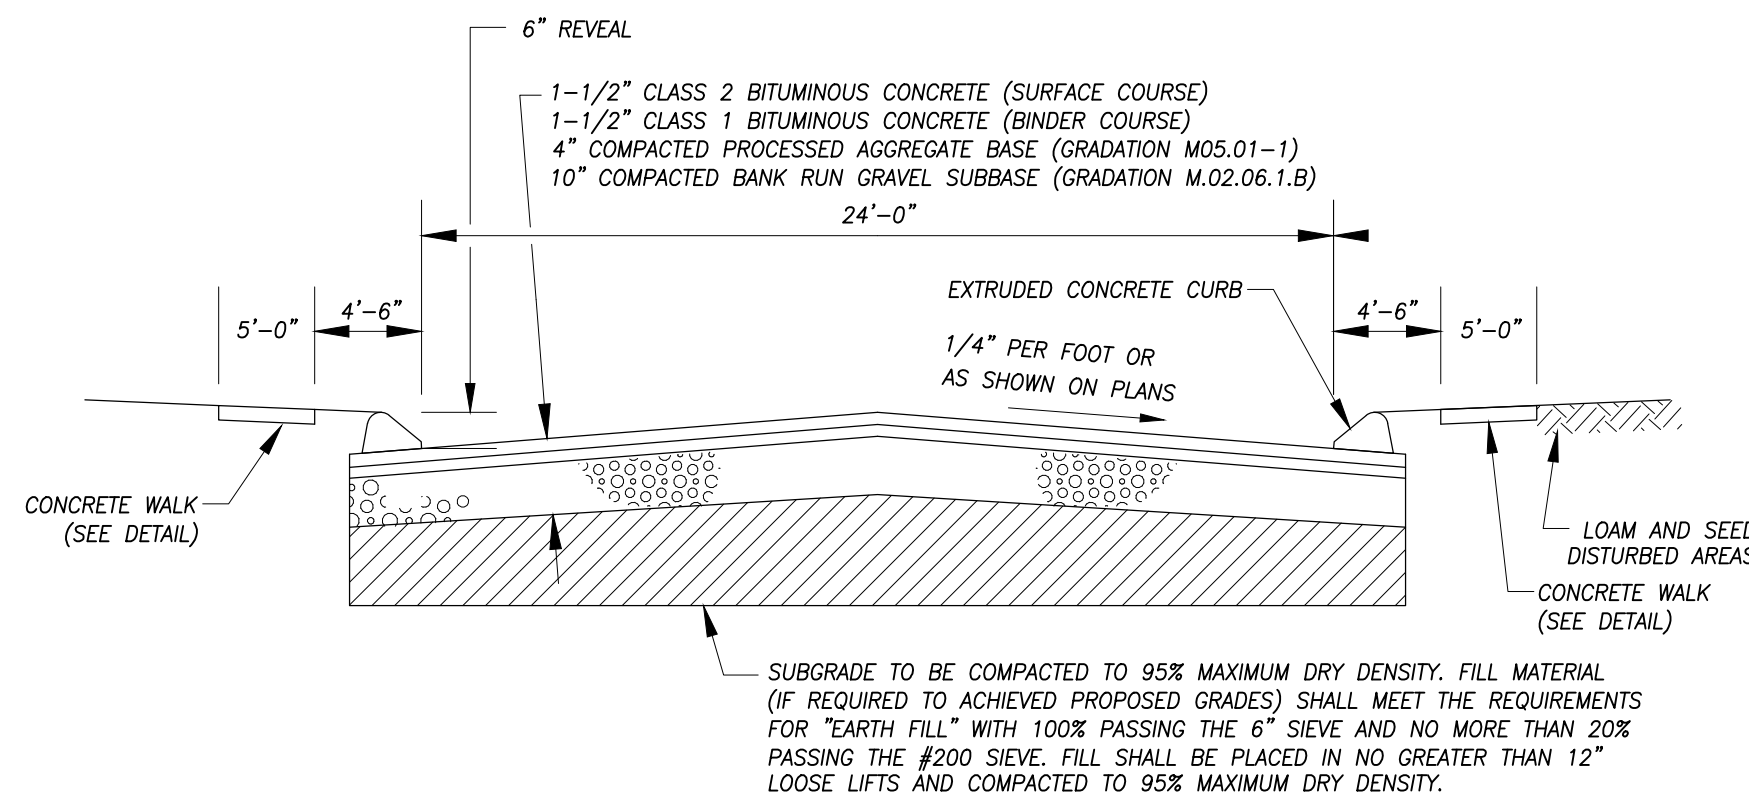


TYPICAL CROSS SECTION FOR ROADWAY PAVEMENT
NOT TO SCALE

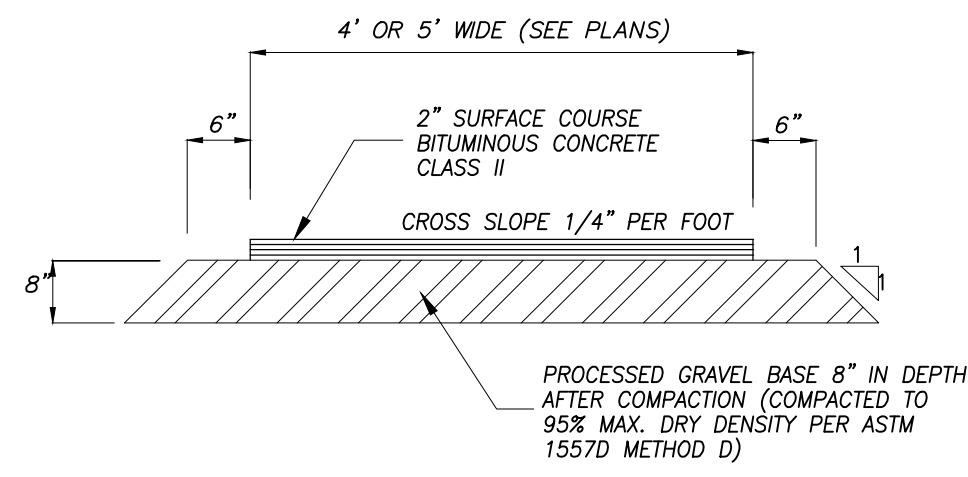


BITUMINOUS CONCRETE SIDEWALK
NOT TO SCALE

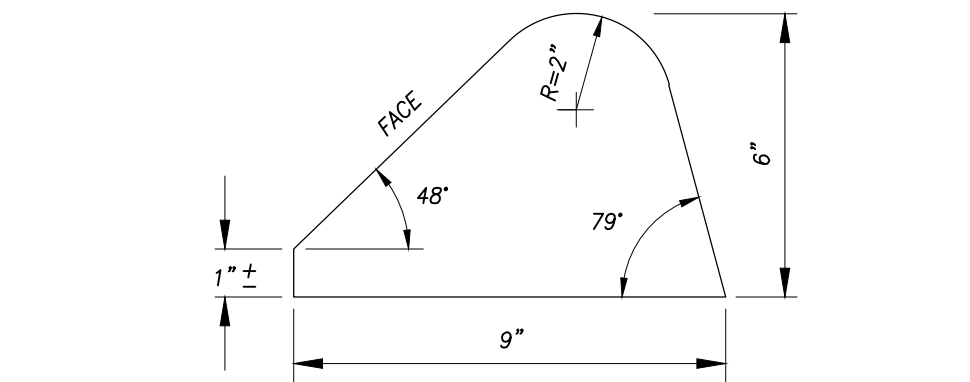


BITUMINOUS CONCRETE LIP CURB DETAIL
NOT TO SCALE

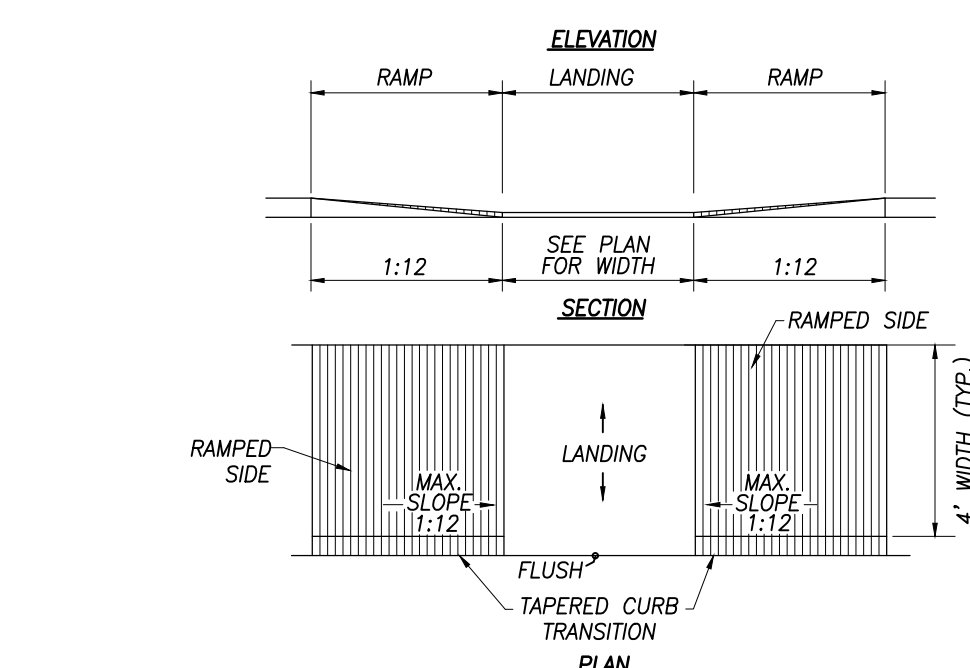


SIDEWALK CURB RAMP AT ACCESSIBLE PARKING DETAIL
NOT TO SCALE

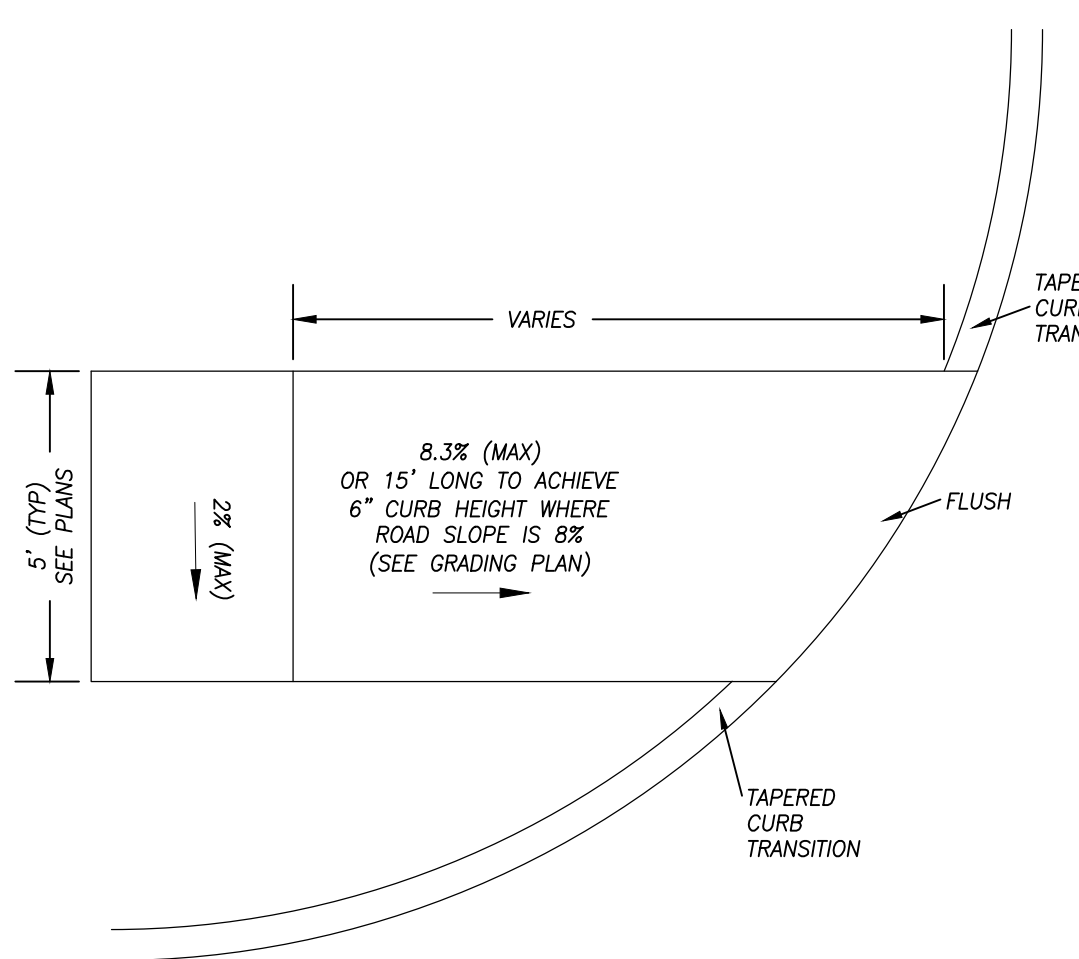


SIDEWALK CURB RAMP DETAIL
NOT TO SCALE

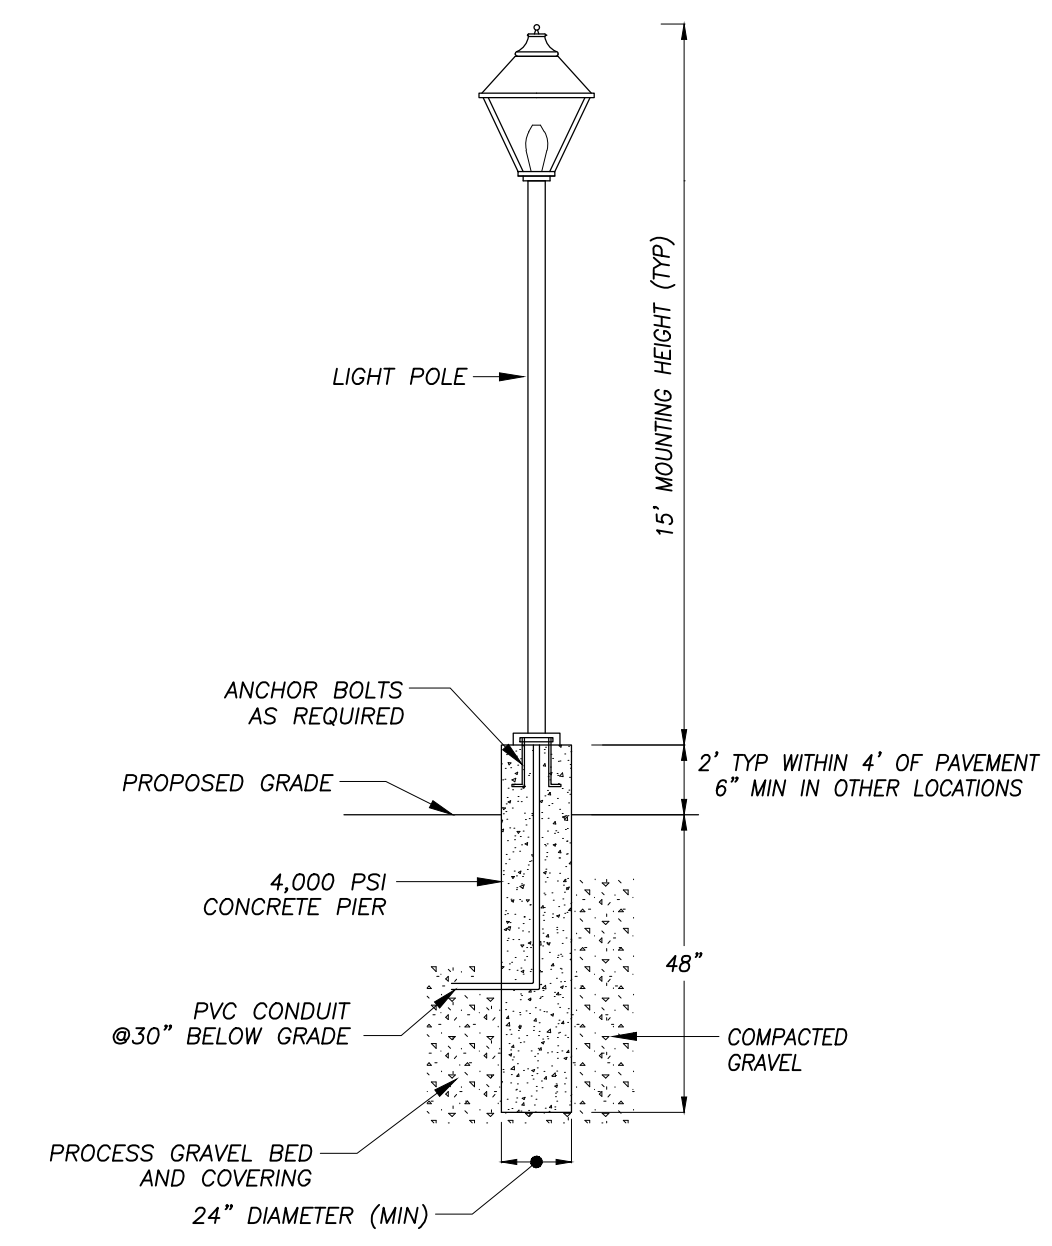

LIGHT POLE DETAIL
NOT TO SCALE

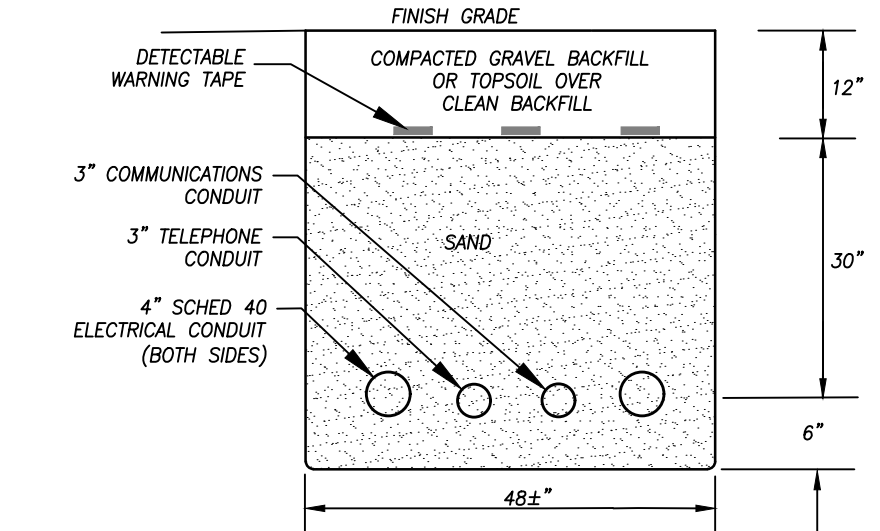

ELECTRIC & TELECOMM TRENCH DETAIL
NOT TO SCALE

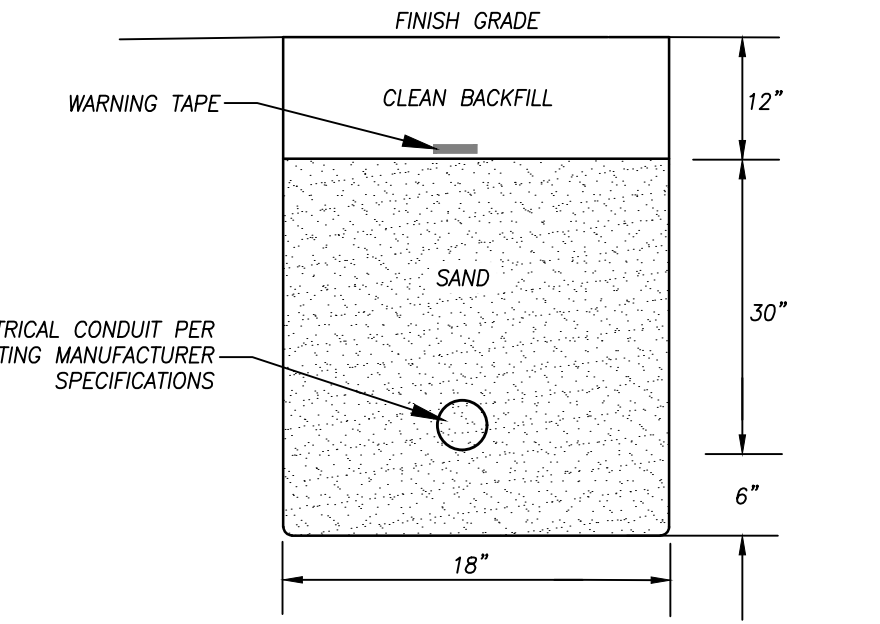


SITE LIGHTING CONDUIT TRENCH DETAIL
NOT TO SCALE

SCALE:	As Noted
DATE:	December 2020
JOB I.D. NO.:	20-2853
Revisions	
Rev. A -	IWWC Comments & Stormwater Quality - 1/18/21
Rev. B -	Per IWWC Conditions of Approval - 1/29/21

NOT FOR CONSTRUCTION
1/29/2021


PLAN NOTES

- SEE COVER SHEET FOR ENGINEER AND SURVEYOR SIGNATURES AND SEALS.
- SEE SHEET 2 FOR LEGEND & ABBREVIATIONS.

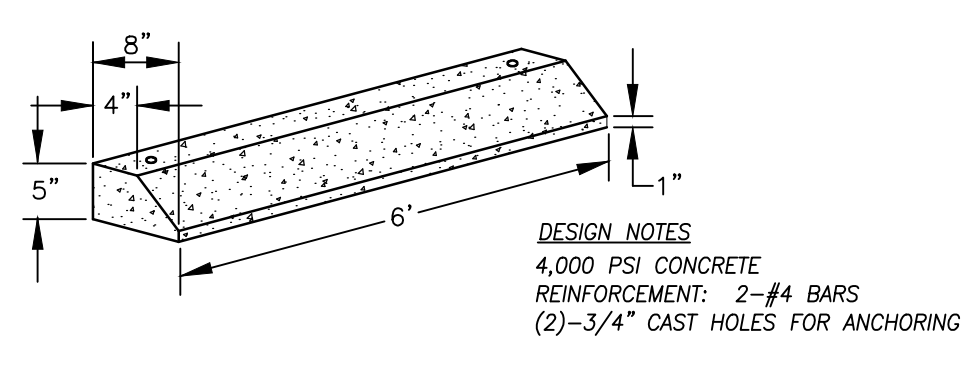


CONCRETE WHEELSTOP DETAIL
 NOT TO SCALE

DESIGN NOTES
 4,000 PSI CONCRETE
 REINFORCEMENT: 2-#4 BARS
 (2)-3/4" CAST HOLES FOR ANCHORING

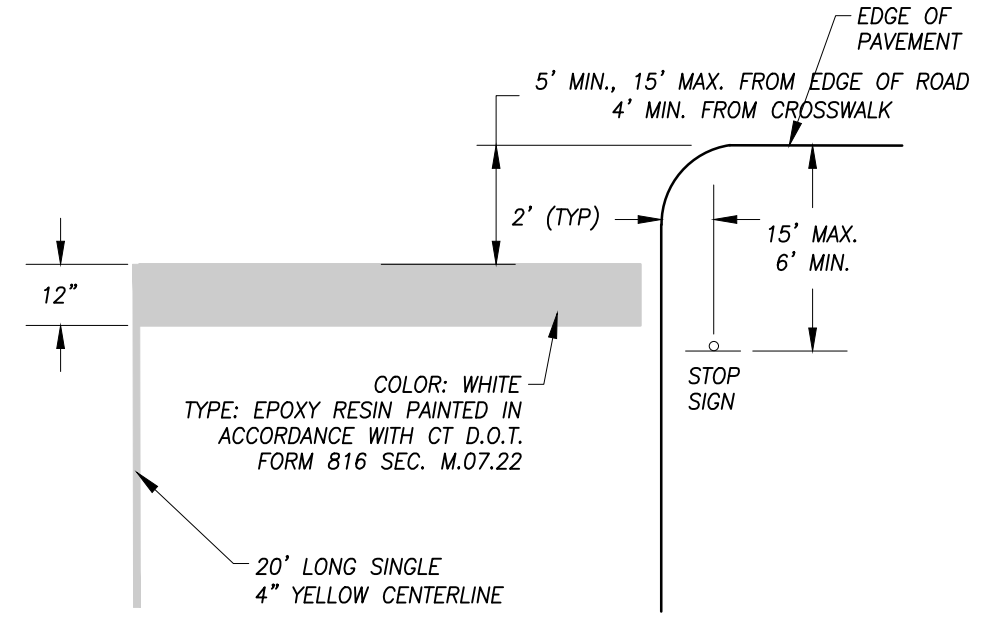


STOP BAR DETAIL
 NOT TO SCALE

COLOR: WHITE
 TYPE: EPOXY RESIN PAINTED IN ACCORDANCE WITH CT D.O.T. FORM 816 SEC. M.07.22

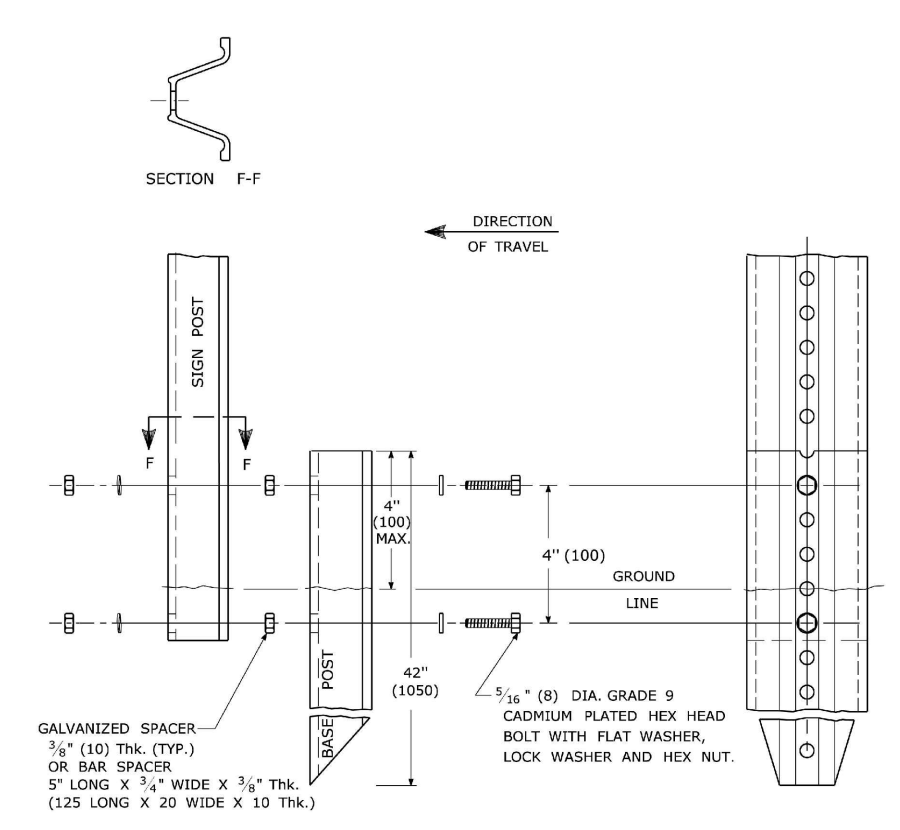


CT DOT BREAKAWAY TYPE II SIGN POST DETAIL
 NOT TO SCALE

SEE CT DOT STANDARD DETAIL SHEET TR-1208_02 FOR ADDITIONAL DETAILS

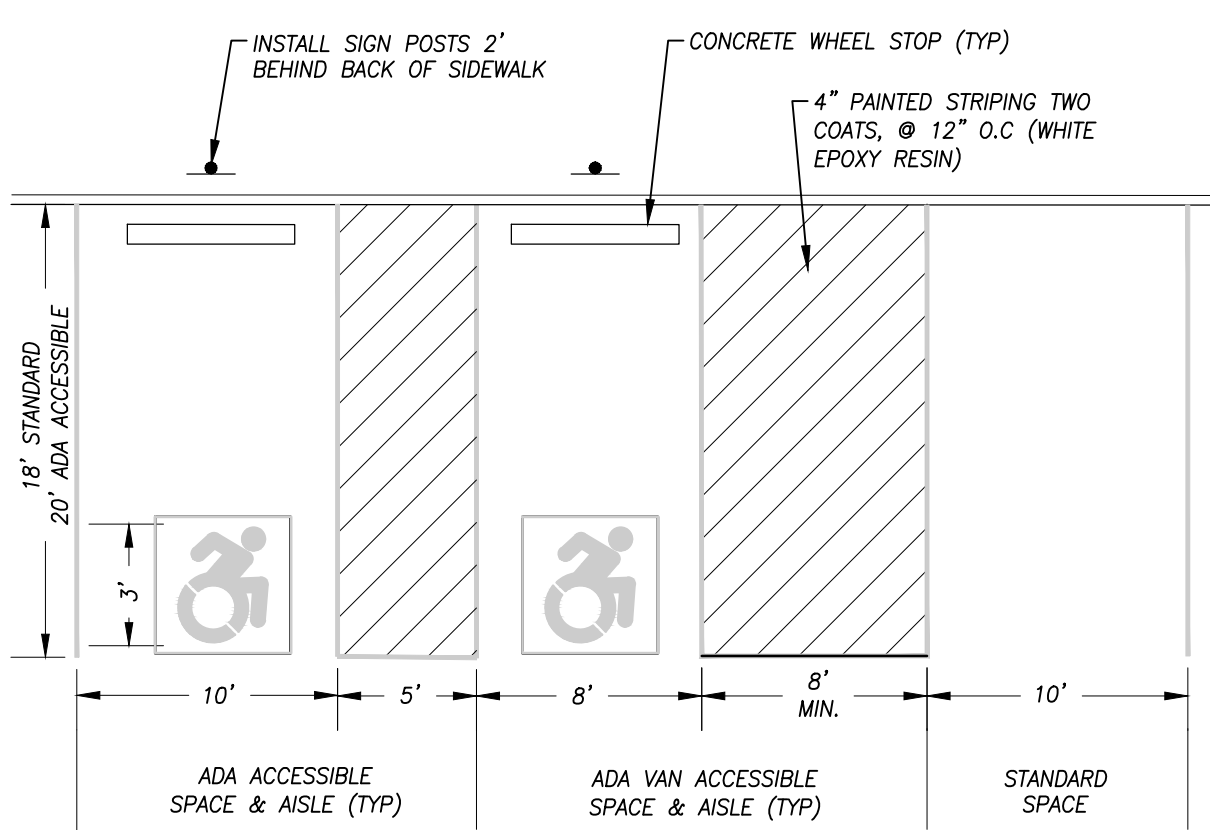


PARKING SPACE DETAILS
 NOT TO SCALE

ADA ACCESSIBLE PARKING SPACE NOTES:
 1. SLOPE ON PAVEMENT SHALL BE NO MORE THAN 2% IN ANY DIRECTION.
 2. CROSS HATCH AISLES MAY NOT BE SHARED BETWEEN TWO SPACES OF DIFFERENT TYPE.
 3. AISLE WIDTH IS 8' FOR VAN ACCESSIBLE SPACES, AND 5' FOR ALL OTHER ACCESSIBLE SPACES.
 4. USE CURRENT "SPEEDY" ADA SYMBOL FOR ALL PAVEMENT MARKINGS AND SIGNS.

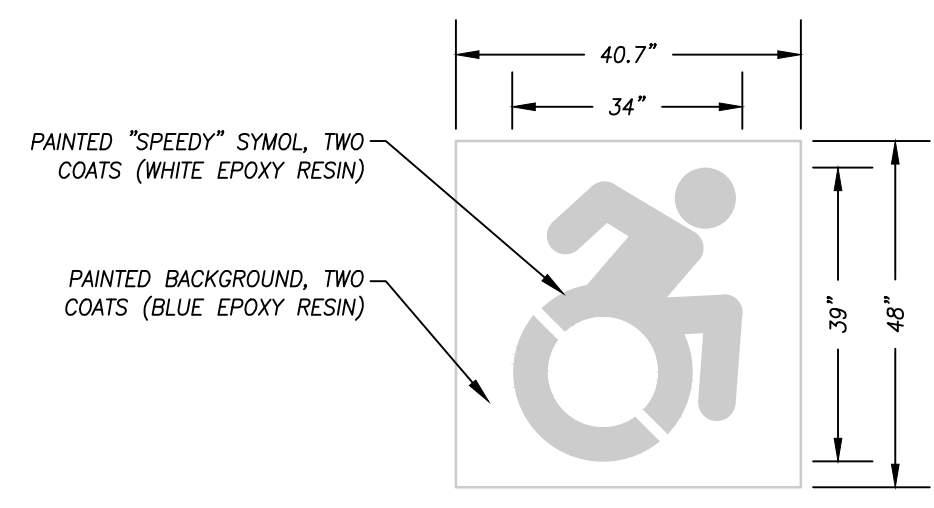


ACCESSIBLE PARKING SPACE SYMBOL DETAIL
 NOT TO SCALE


COLOR: WHITE
 TYPE: EPOXY RESIN
 PAINTED IN ACCORDANCE WITH CT D.O.T. FORM 817 SEC. M.07.22

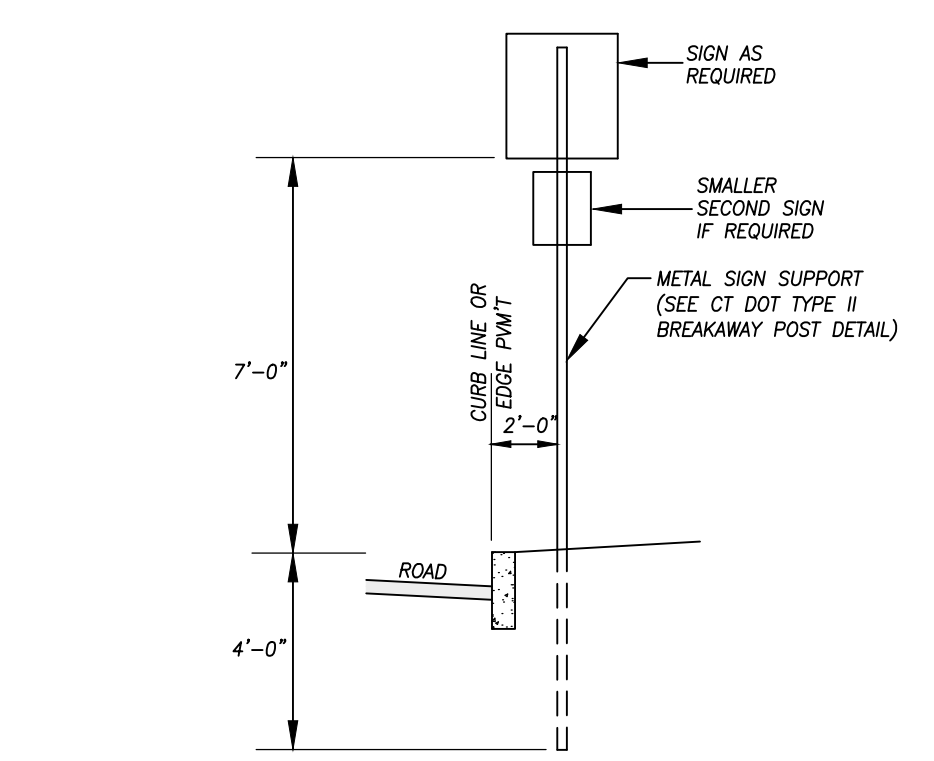

DIRECTIONAL SIGN SUPPORT DETAIL
 NOT TO SCALE

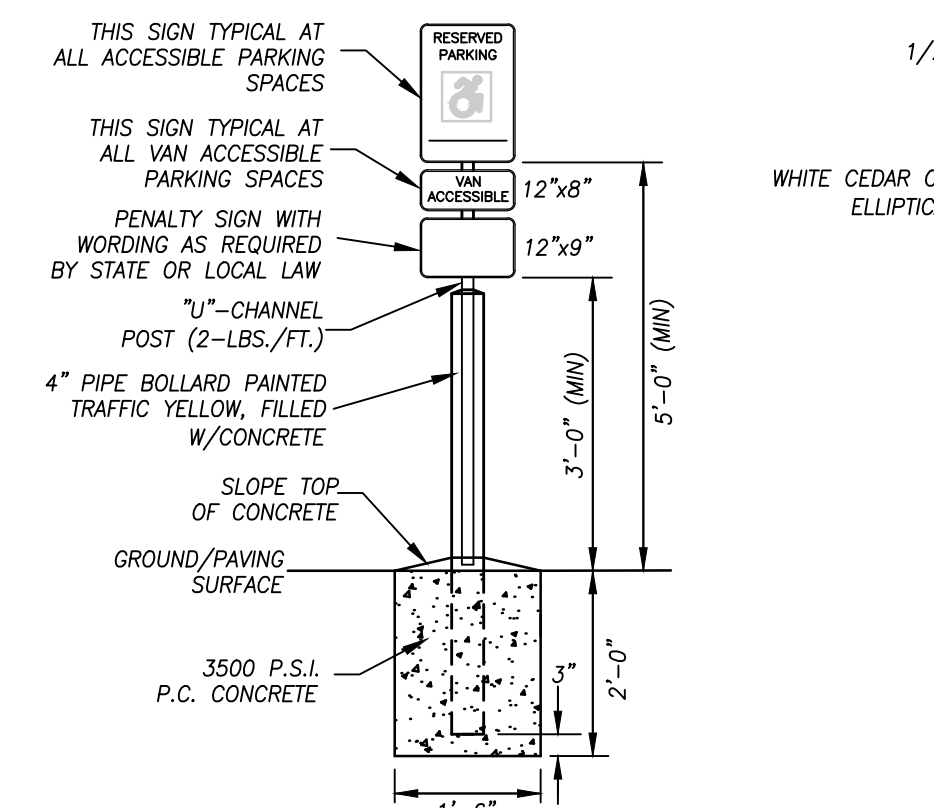


ACCESSIBLE PARKING SIGN DETAIL
 NOT TO SCALE

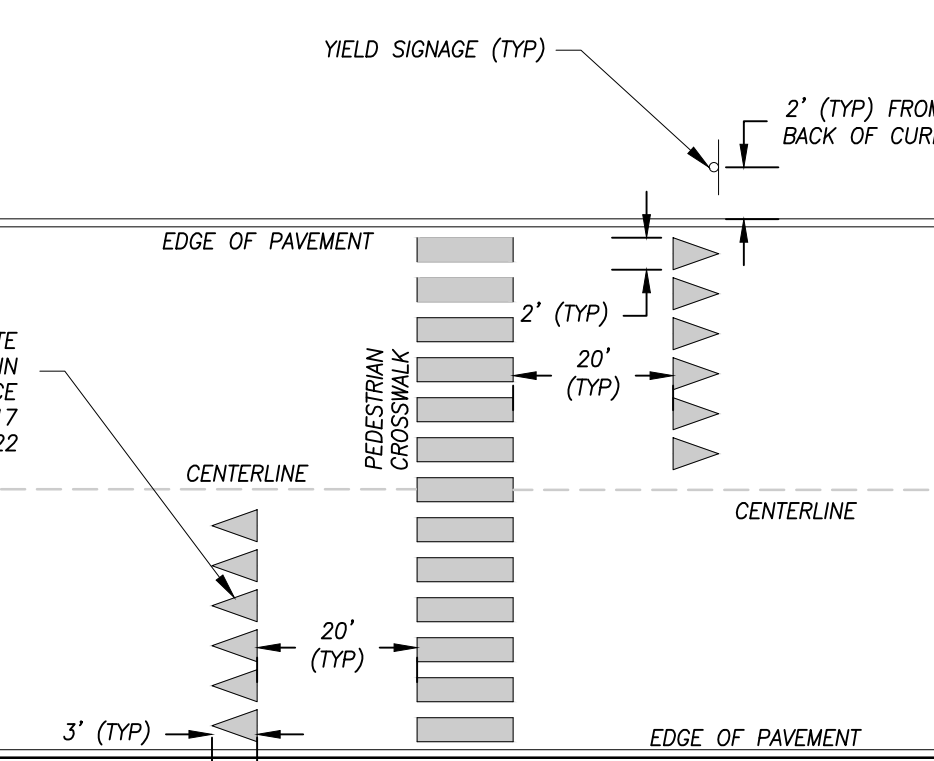


CROSSWALK YIELD DETAIL
 NOT TO SCALE

COLOR: WHITE
 TYPE: EPOXY RESIN
 PAINTED IN ACCORDANCE WITH CT D.O.T. FORM 817 SEC. M.07.22

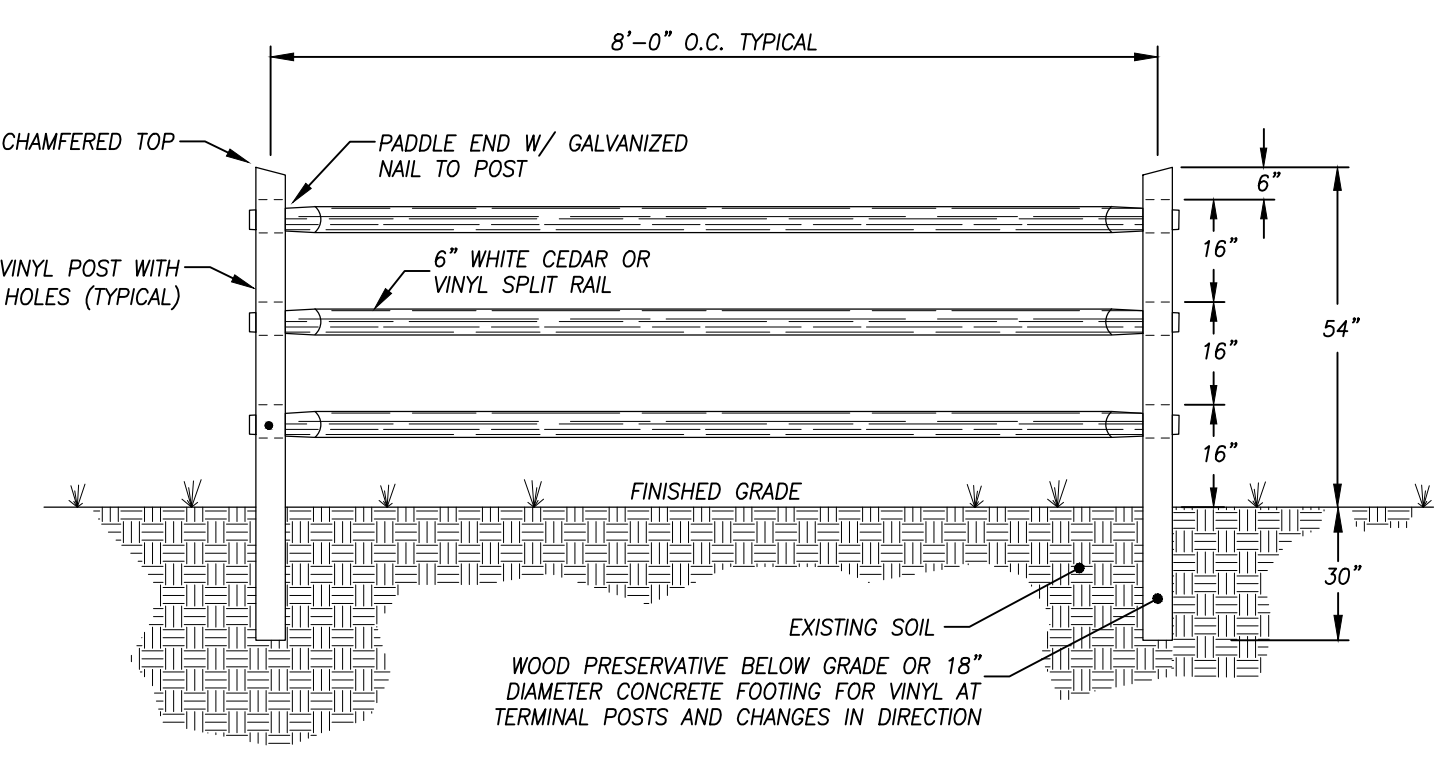


SPLIT RAIL FENCE DETAIL
 NOT TO SCALE

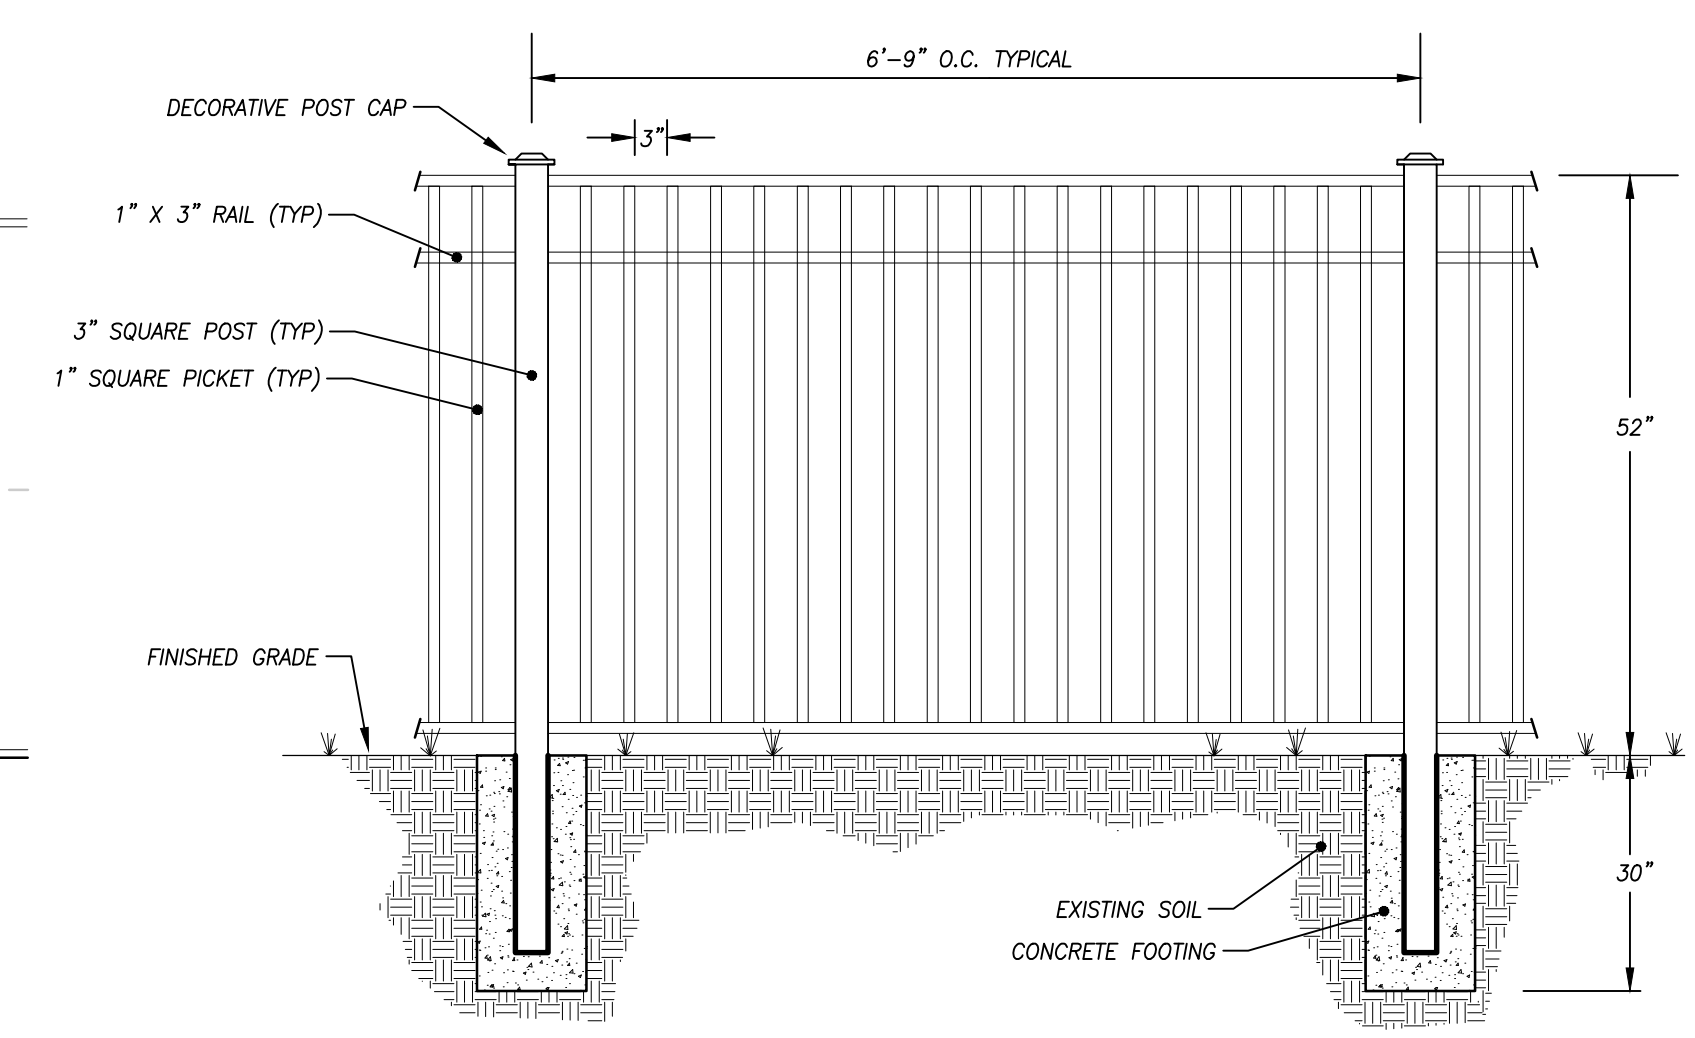


DECORATIVE FENCE DETAIL
 NOT TO SCALE

NOTES:
 1. ALL DECORATIVE FENCE SHALL BE MATTE BLACK POWDERCOAT OR OTHER SIMILAR DURABLE FINISH.

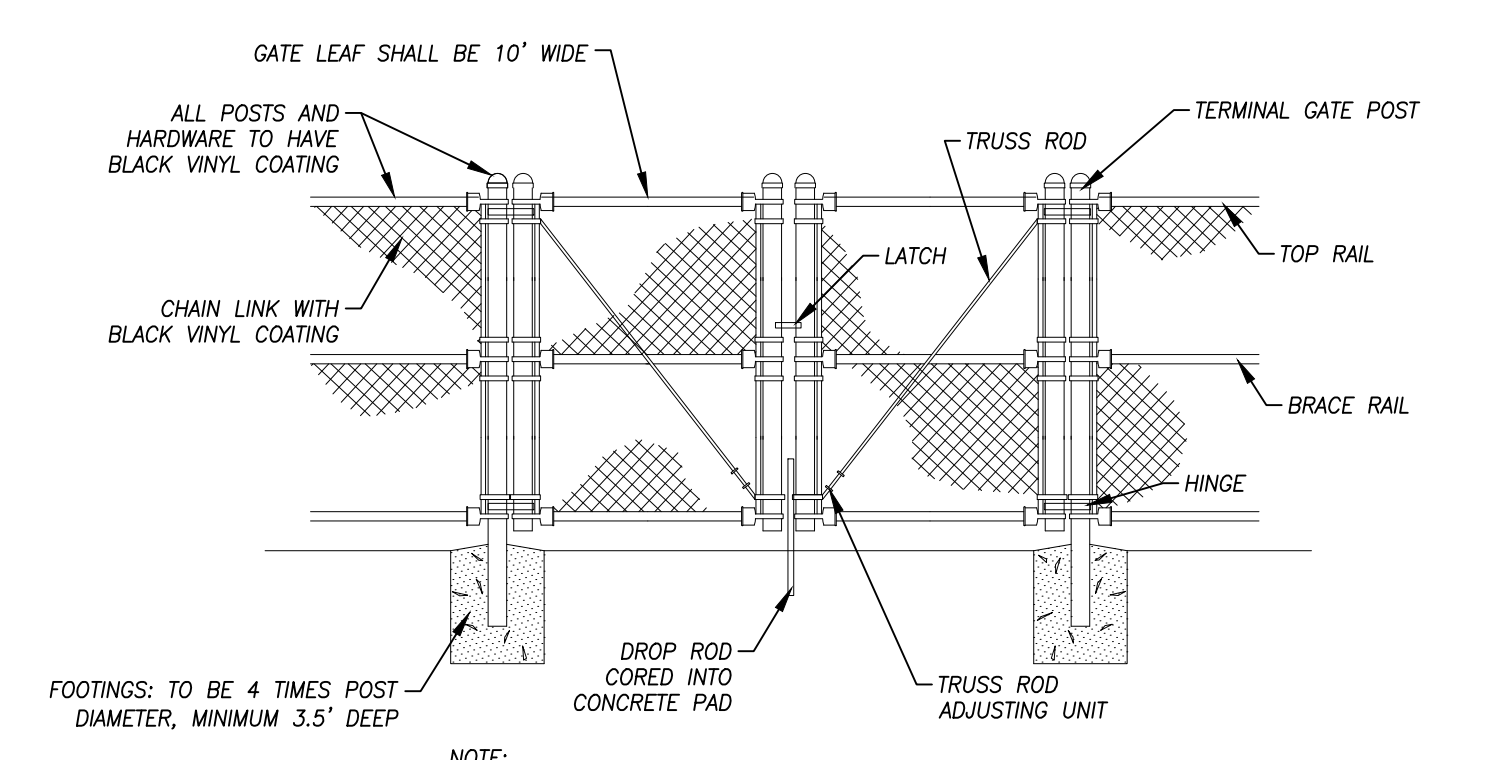


6' HIGH SWING GATE DETAIL
 NOT TO SCALE

NOTE:
 SWING GATES TO BE INSTALLED IN ACCORDANCE WITH MANUFACTURER'S REQUIREMENTS.

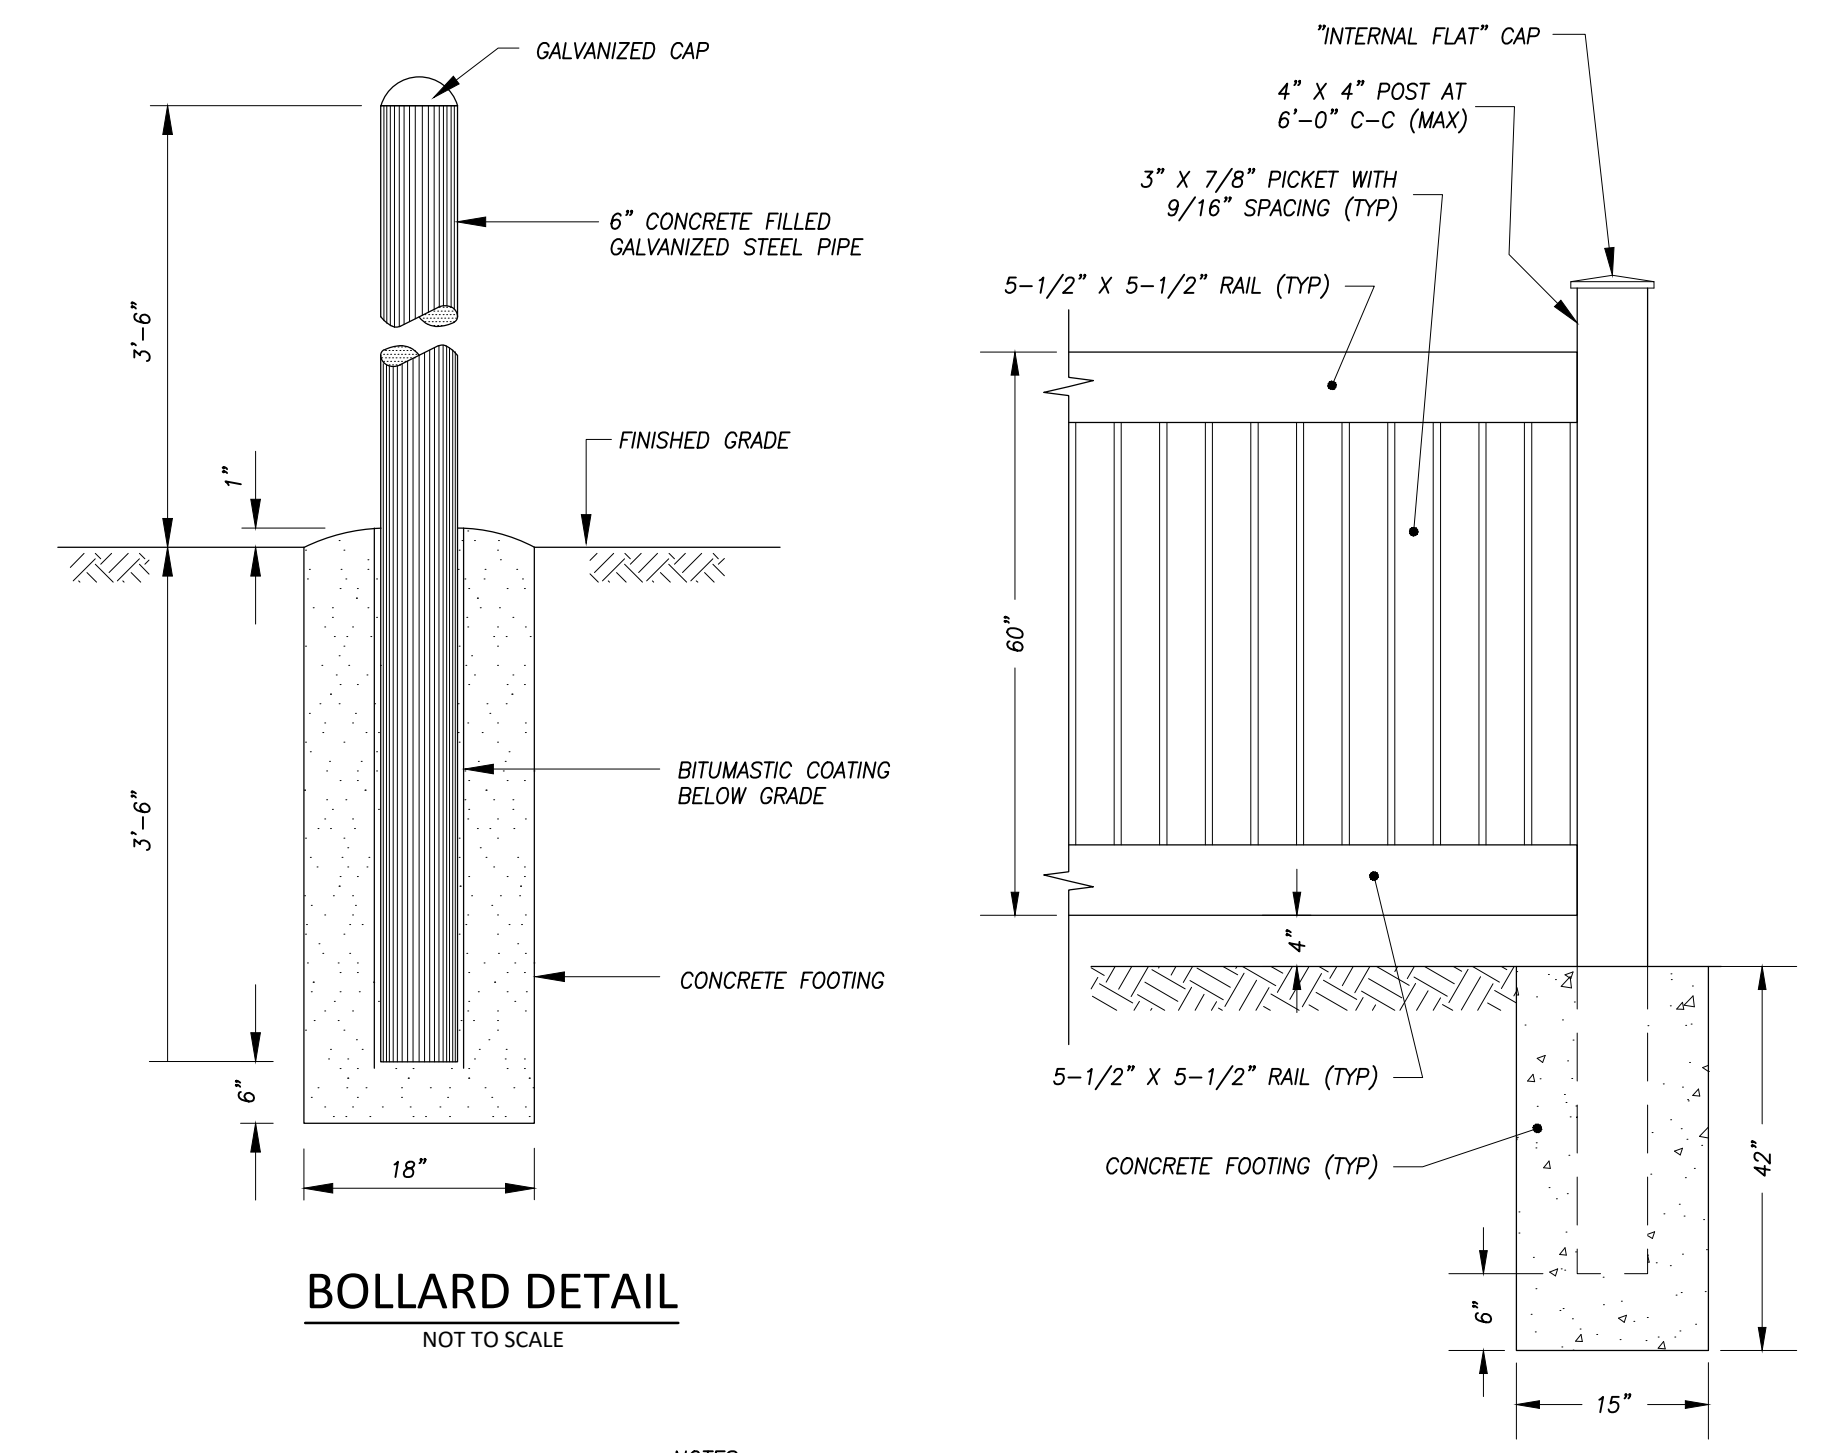


BOLLARD DETAIL
 NOT TO SCALE

NOTES:
 1. FENCE TO BE "IMPERIAL" SEMI-PRIVATE FENCE SYSTEM IN COLOR WHITE AS MANUFACTURED BY BUFF-TECH, OR APPROVED EQUAL.
 2. PROVIDE EQUAL SPACING OF POSTS.

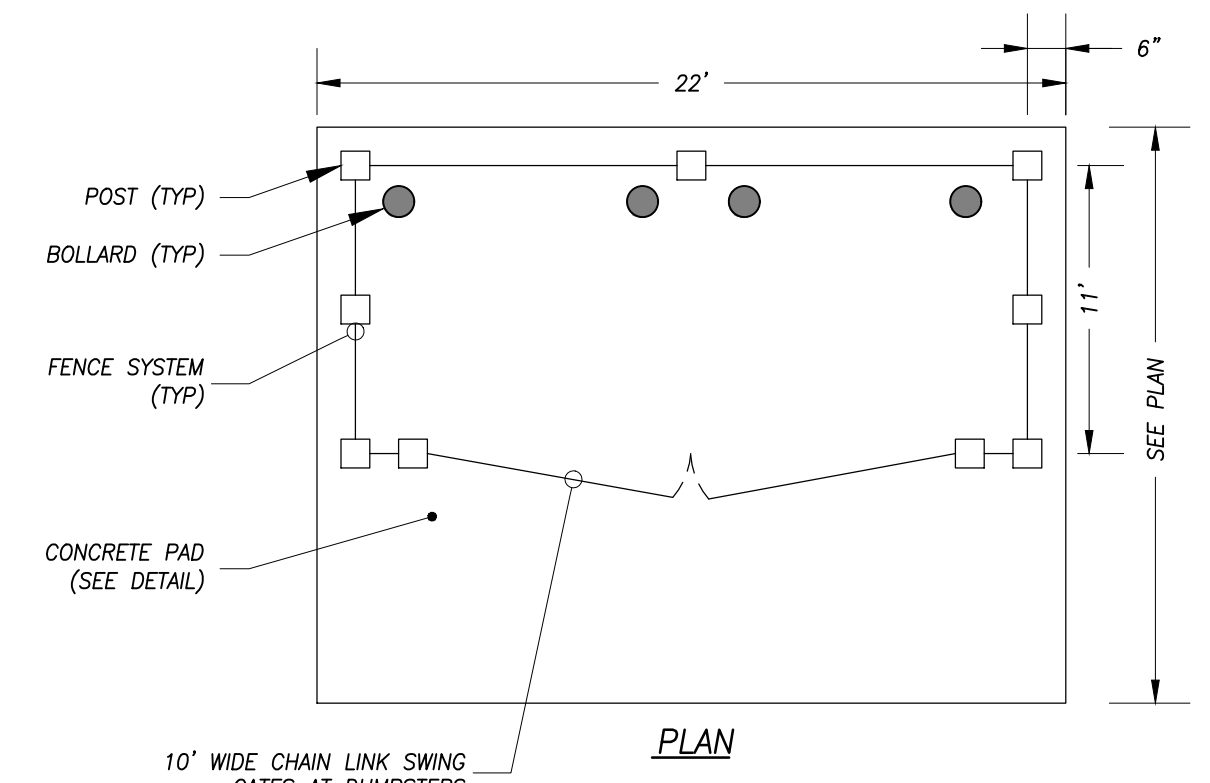

DUMPSTER ENCLOSURE DETAIL
 NOT TO SCALE

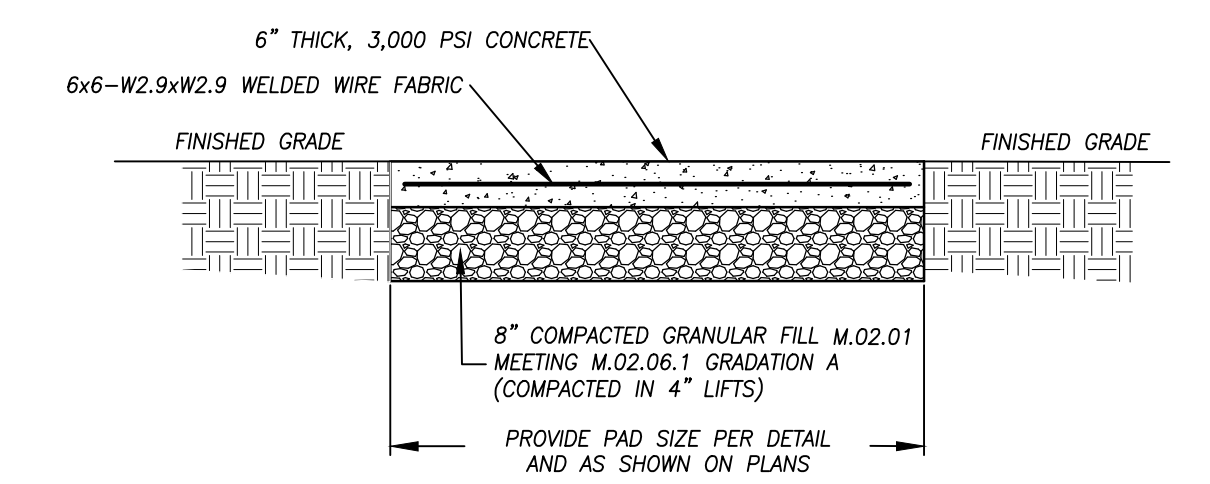


CONCRETE DUMPSTER PAD DETAIL
 NOT TO SCALE

NOT FOR CONSTRUCTION
 1/29/2021


PLAN NOTES
 1. SEE COVER SHEET FOR ENGINEER AND SURVEYOR SIGNATURES AND SEALS.
 2. SEE SHEET 2 FOR LEGEND & ABBREVIATIONS.

P:\CIVIL 3D PROJECTS\2020\20-2853 EDGEWATER-APARTMENTS\DWG\DESIGN\4 NOTES AND DETAILS.DWG

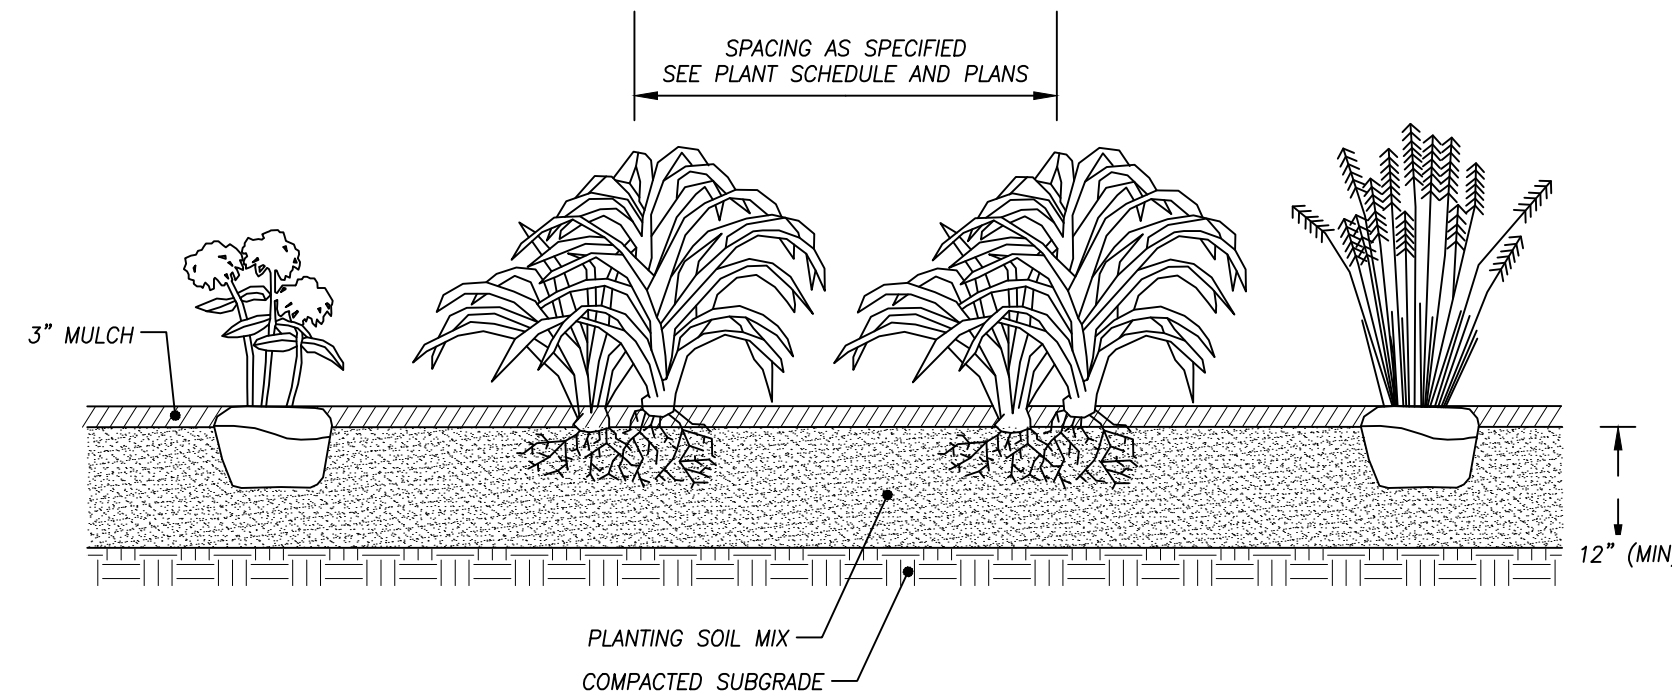


- NOTES:**
1. ROTOTILL FERTILIZER AND LIME INTO SOIL PRIOR TO PLANTING IN ACCORDANCE WITH SOIL ANALYSIS RECOMMENDATIONS.
 2. DO NOT OVER-COMPACT PLANTING BED. WATER THOROUGHLY AFTER PLANTING.
 3. ADJUST PLANTING DEPTH AS RECOMMENDED BY SUPPLIER.
 4. MULCH SHALL NOT COME INTO CONTACT WITH CROWNS OF PERENNIALS.


PERENNIAL/GROUNDCOVER PLANTING DETAIL
 NOT TO SCALE

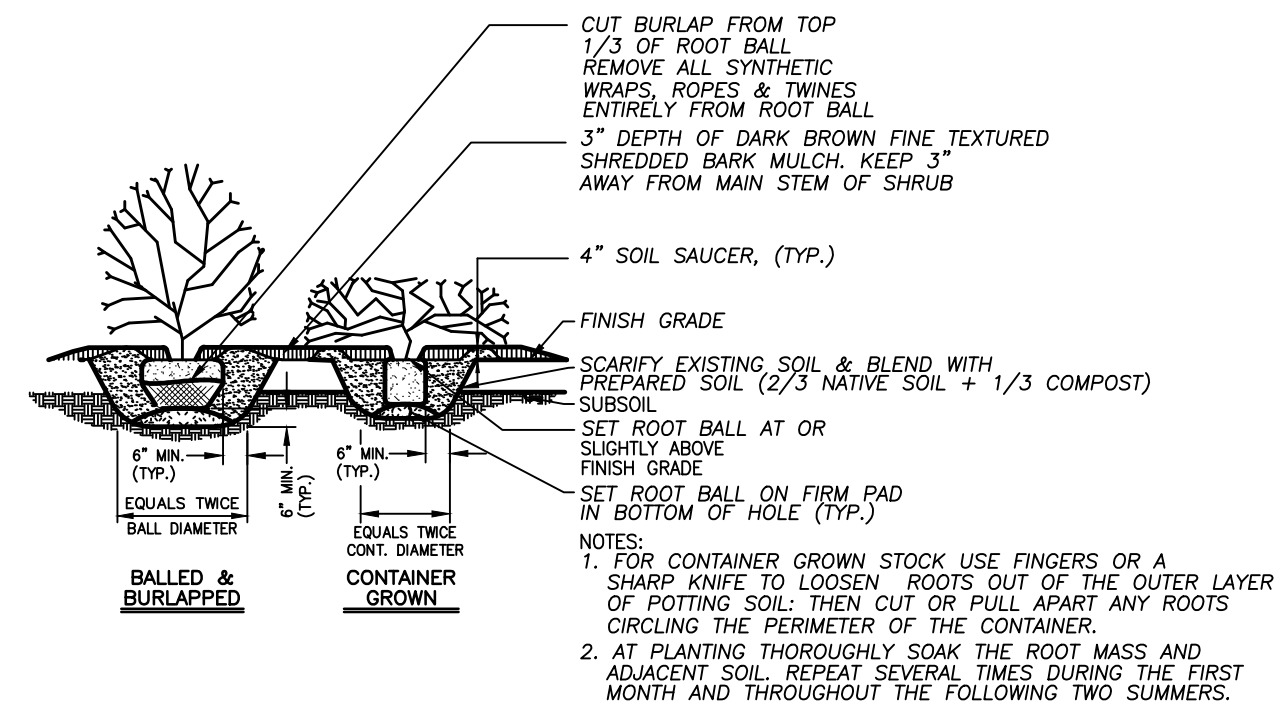


SHRUB PLANTING DETAIL
 NOT TO SCALE

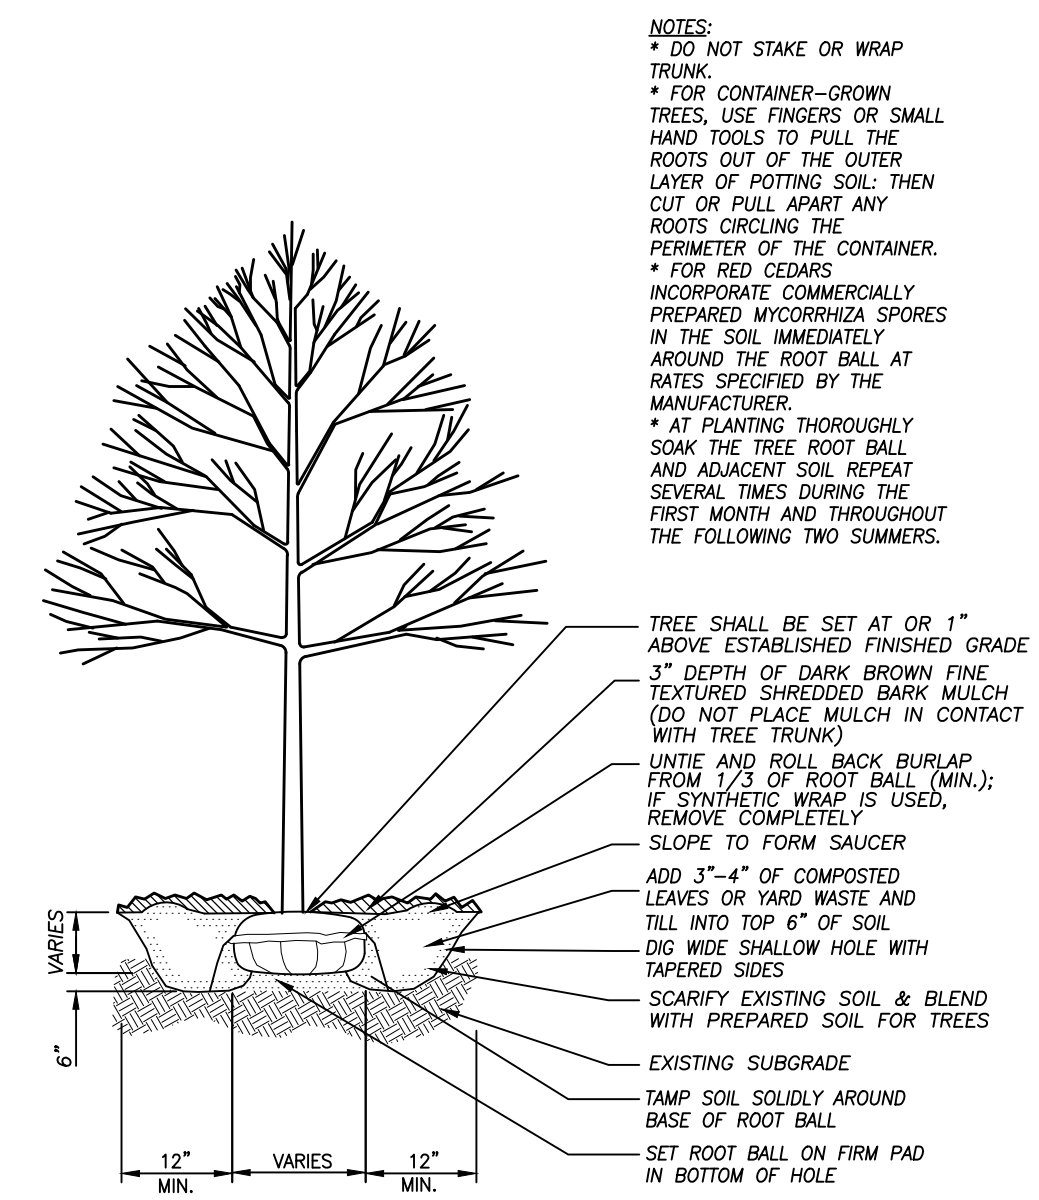

TREE PLANTING DETAIL
 NOT TO SCALE

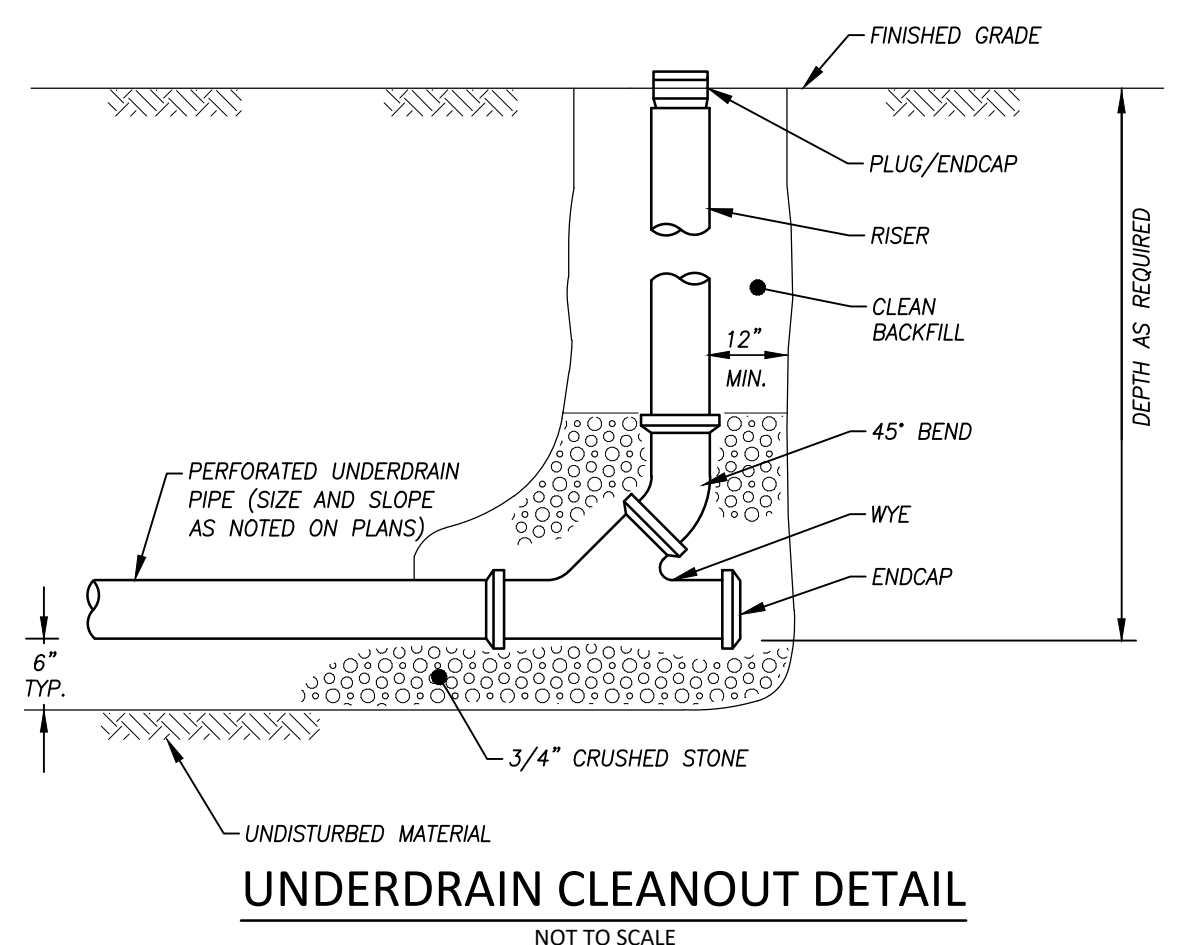


UNDERDRAIN CLEANOUT DETAIL
 NOT TO SCALE

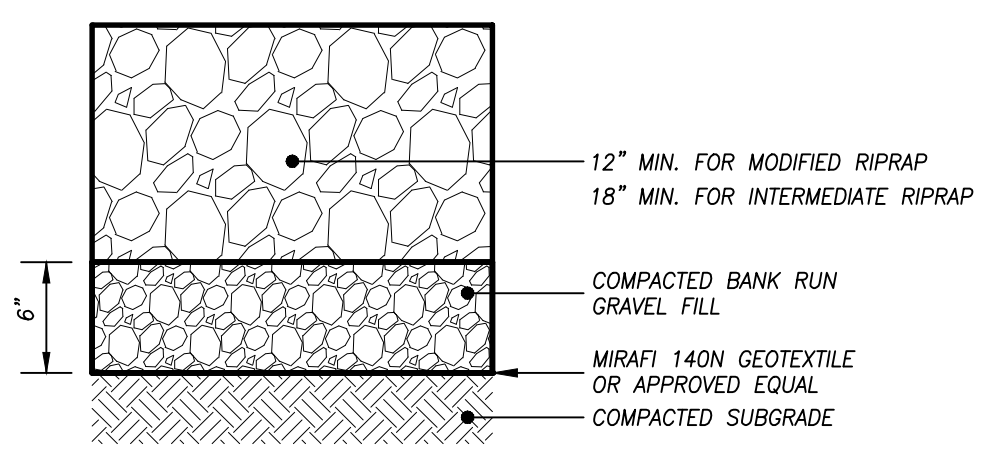


- NOTES:**
1. TO BE USED AT PIPE DISCHARGES AND RIP RAP SWALE. SEE PLAN FOR APRON DIMENSIONS.


TYPICAL RIPRAP SECTION
 NOT TO SCALE

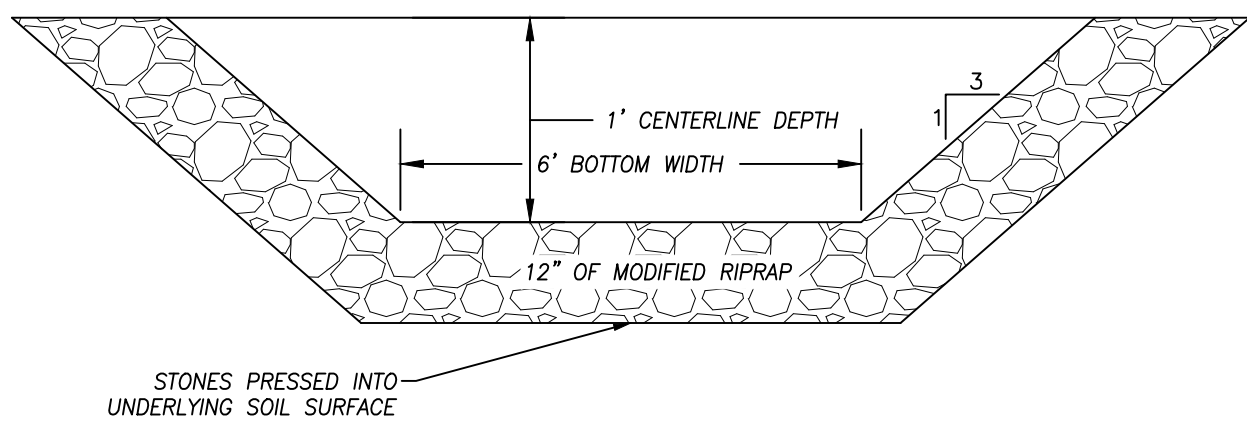


MODIFIED RIP RAP SWALE DETAIL
 NOT TO SCALE

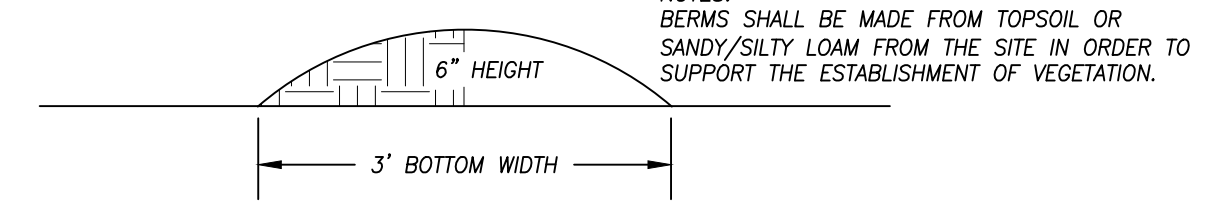

DETAIL OF EARTH BERMS IN CONSTRUCTED WETLAND SYSTEM
 NOT TO SCALE

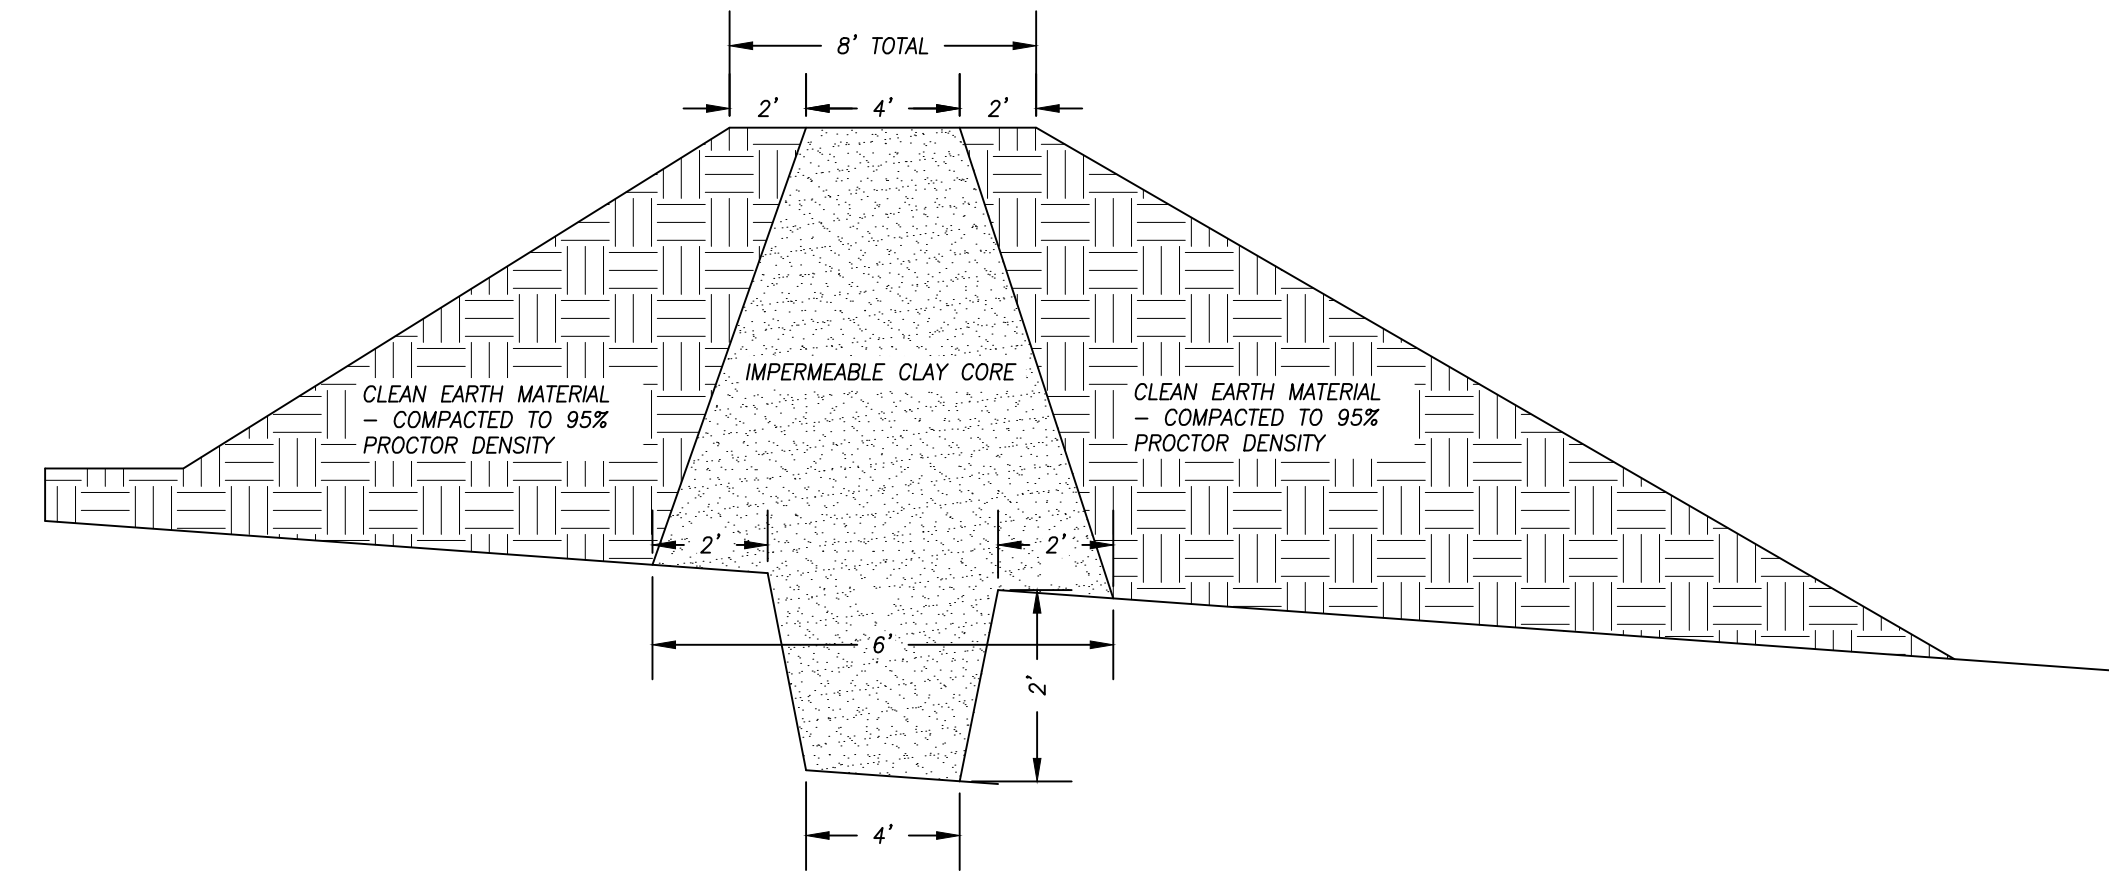


SECTION THROUGH STORMWATER BASIN 1 EMBANKMENT SHOWING IMPERMEABLE CORE
 NOT TO SCALE

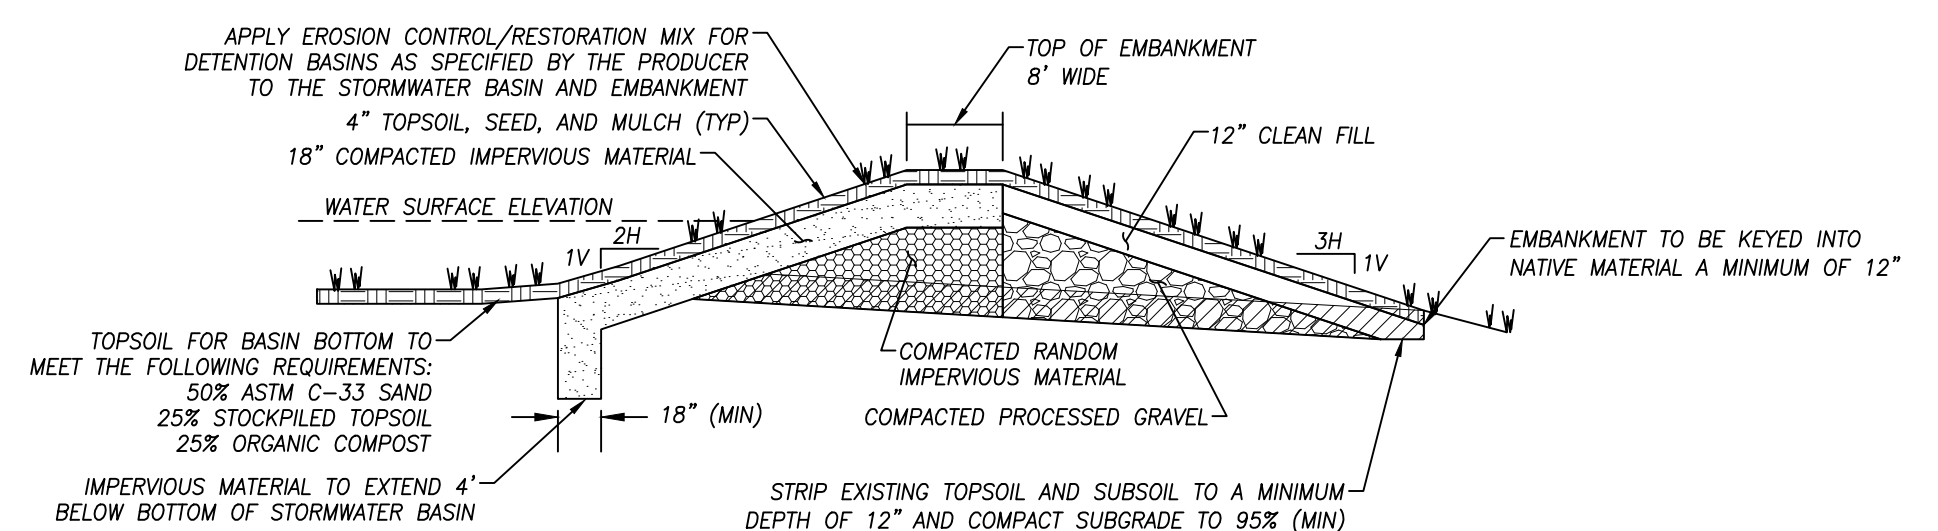


- NOTES:**
1. REMOVE VEGETATION, DEBRIS, ORGANIC MATERIALS, AND TOPSOIL TO A MINIMUM OF 12" BELOW EXISTING GRADE PRIOR TO EMBANKMENT CONSTRUCTION. COMPACTED EXPOSED SUBSOIL AND SCARIFY SURFACE.
 2. FILL MATERIALS SHALL BE PLACED IN LIFTS NOT EXCEEDING 12". PRIOR TO COMPACTION EACH LIFT SHALL BE MOISTENED AS NECESSARY TO ACHIEVE THE OPTIMUM MOISTURE CONTENT. THE TOP 12" OF SUBGRADE AND EACH LIFT SHALL BE COMPACTED TO 95% OF MAXIMUM DENSITY AT OPTIMUM MOISTURE CONTENT AS DETERMINED IN ACCORDANCE WITH ASTM D1557. FILL MATERIAL SHALL NOT BE PLACED ON SURFACES THAT ARE MUDDY, FROZEN, OR CONTAINING FROST, ICE, OR ORGANICS.
 3. CLEAN FILL MATERIAL SHALL BE FREE OF ORGANICS AND NO STONES GREATER THAN 3".
 4. PROCESSED GRAVEL SHALL MEET THE REQUIREMENTS OF CT DOT FORM 817 M02.06 GRADATION A.
 5. IMPERVIOUS MATERIAL SHALL BE DENSE GRADED AND HAVE A PERMEABILITY RATE OF 1 X 10-4 CM/SEC OR LESS, HAVE A PERCENTAGE OF MATERIALS PASSING THE NO. 200 SIEVE OF GREATER THAN 10%, AND AN EFFECTIVE GRAIN SIZE DIAMETER (D10) OF 0.05 MM OR LESS. IT SHALL BE FREE OF ORGANICS AND SHALL HAVE NO STONES GREATER THAN 2".
 6. RANDOM IMPERVIOUS MATERIAL SHALL BE DENSE GRADED AND FREE OF ORGANICS WITH NO STONES LARGER THAN 2". MATERIAL SHALL MEET ONE OF THE FOLLOWING GRADATIONS:

Sieve Size	Percent Passing	
	1-1/4" Processed Aggregate	2" Processed Aggregate
2-1/2"	100	100
2"	100	96
1-1/2"	99	91
1"	61	67
3/4"	51	58
1/4"	40	33
#40	16	15
#200	7	5

STORMWATER BASIN 2 EMBANKMENT DETAIL
 NOT TO SCALE

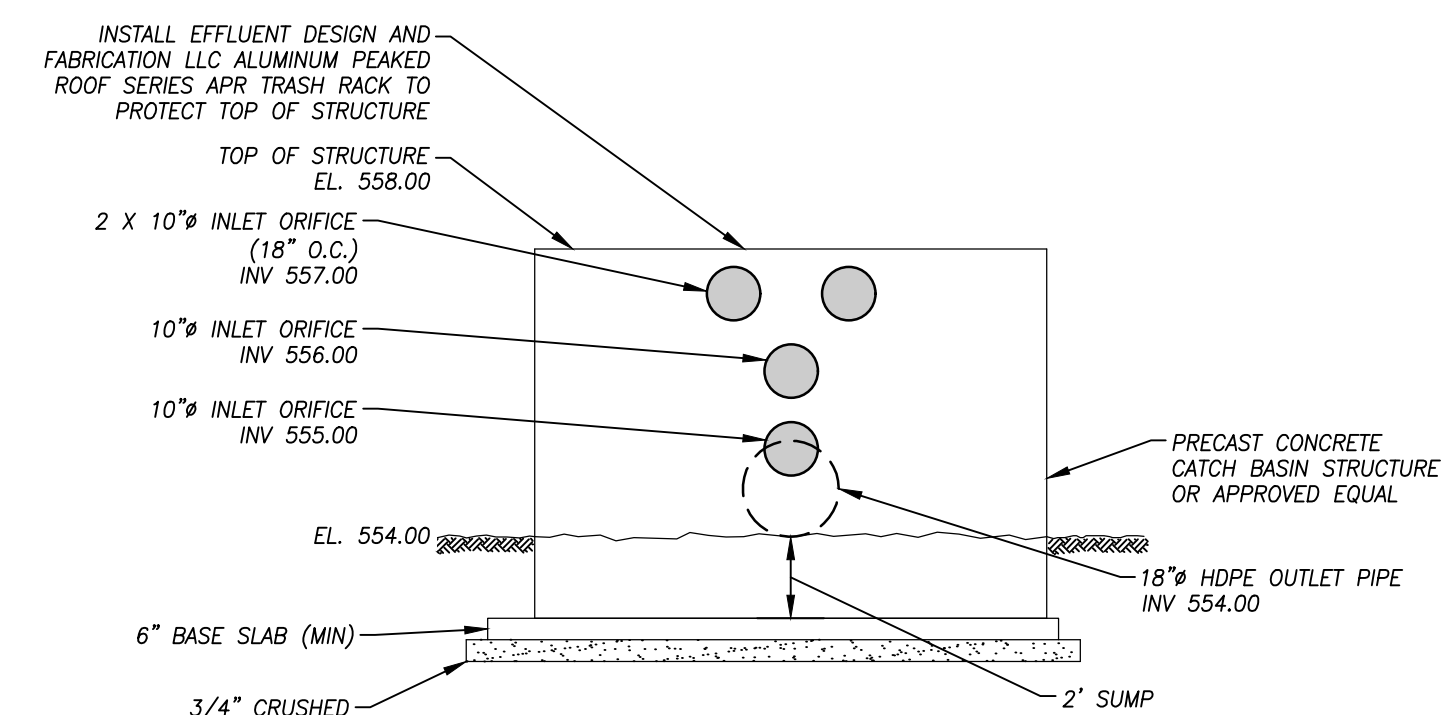

OUTLET CONTROL STRUCTURE 1
 NOT TO SCALE

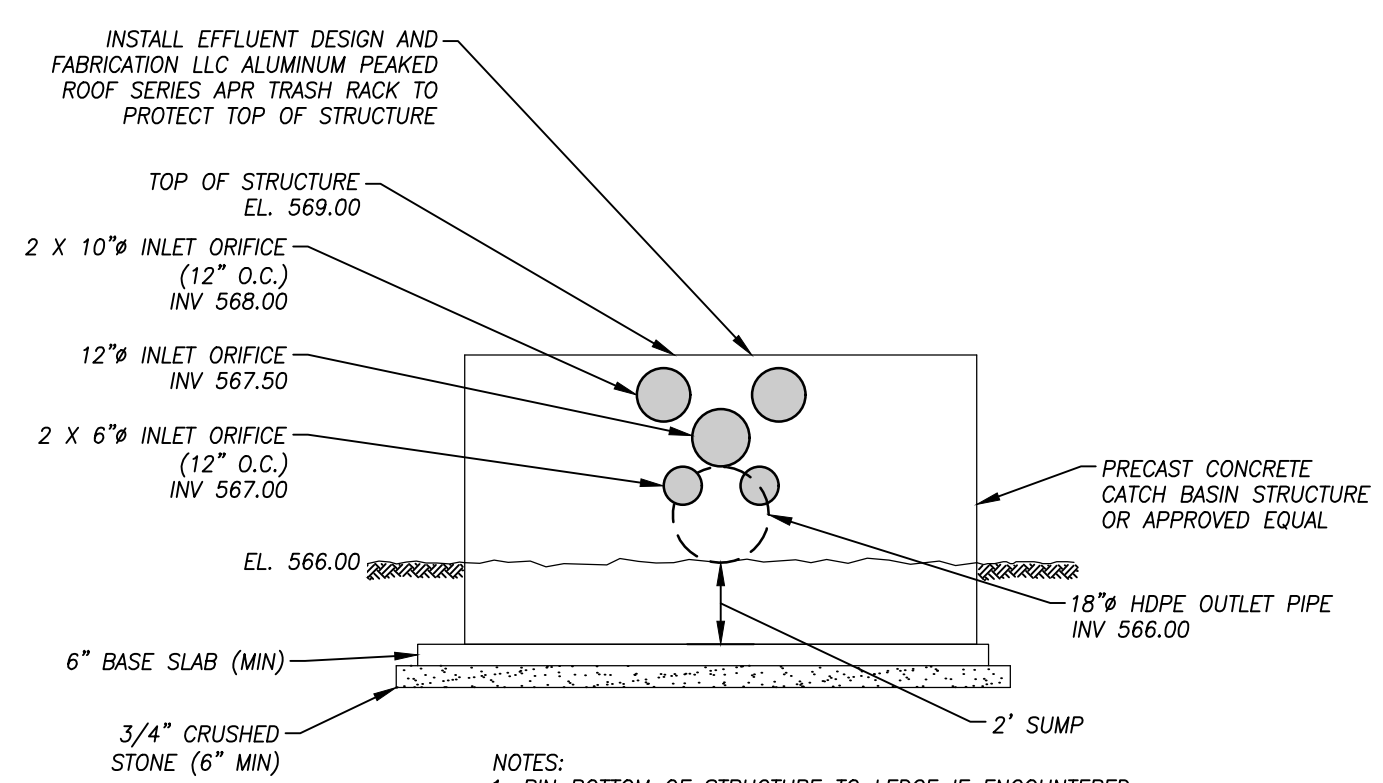

OUTLET CONTROL STRUCTURE 2
 NOT TO SCALE

NOT FOR CONSTRUCTION
 1/29/2021

PLAN NOTES

1. SEE COVER SHEET FOR ENGINEER AND SURVEYOR SIGNATURES AND SEALS.
2. SEE SHEET 2 FOR LEGEND & ABBREVIATIONS.


Salt Pond Apartments at Edgewater Hill
 "Construction Details"
 Prepared for
 Edgewater Hill Enterprises, LLC
 000 East High Street - East Hampton, Connecticut

SCALE: As Noted
 DATE: December 2020
 JOB I.D. NO. 20-2853
Revisions
 Rev. A - IWWC Comments & Stormwater Quality - 1/18/21
 Rev. B - Per IWWC Conditions of Approval - 1/29/21


SHEET NO.

22
 25


P:\CIVIL 3D PROJECTS\2020\20-2853 EDgewater-APARTMENTS\DWG\DESIGN\4 NOTES AND DETAILS.DWG

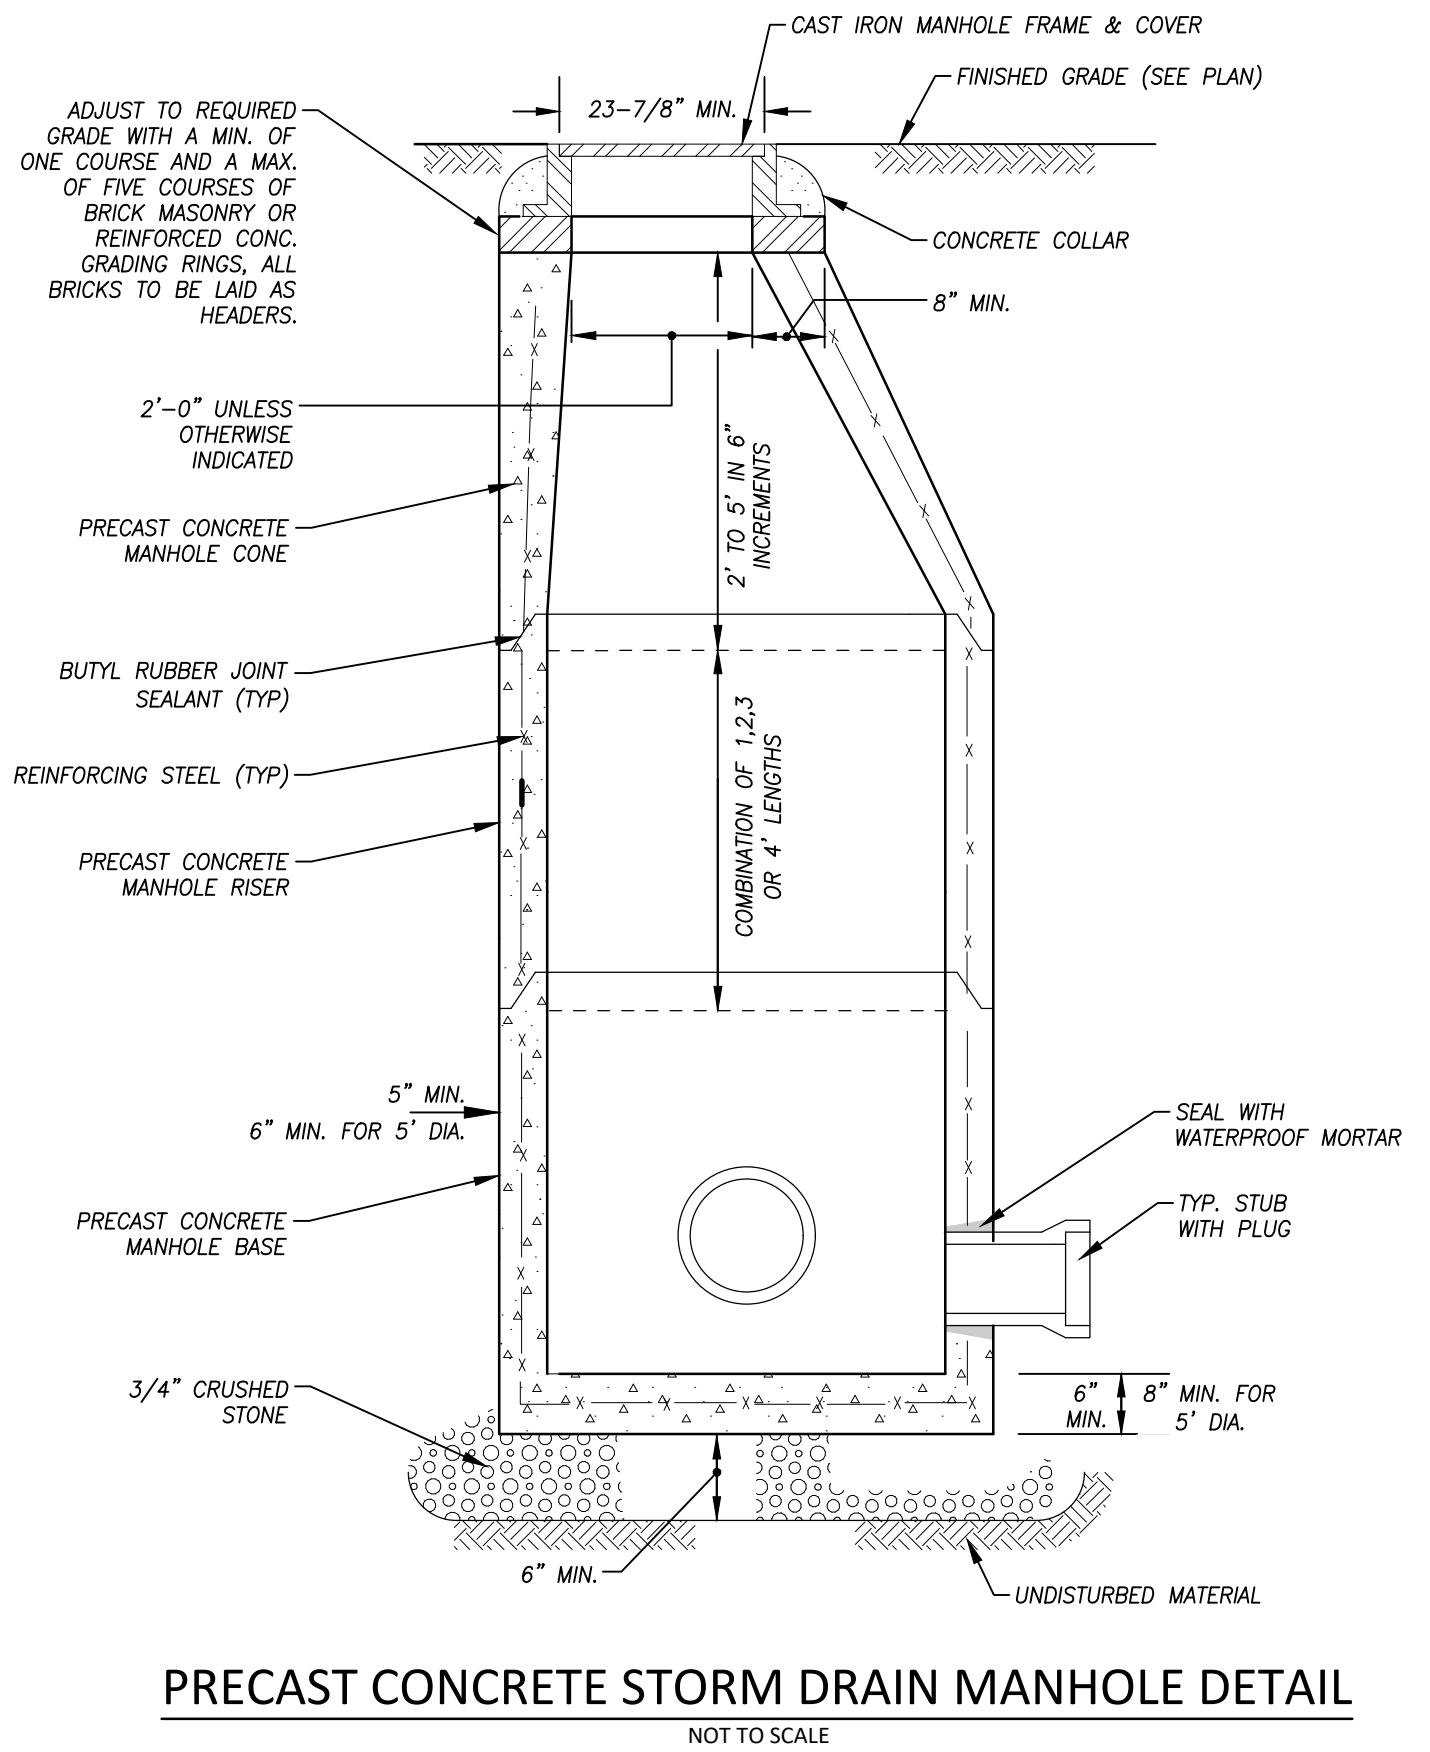


PRECAST CONCRETE STORM DRAIN MANHOLE DETAIL
NOT TO SCALE

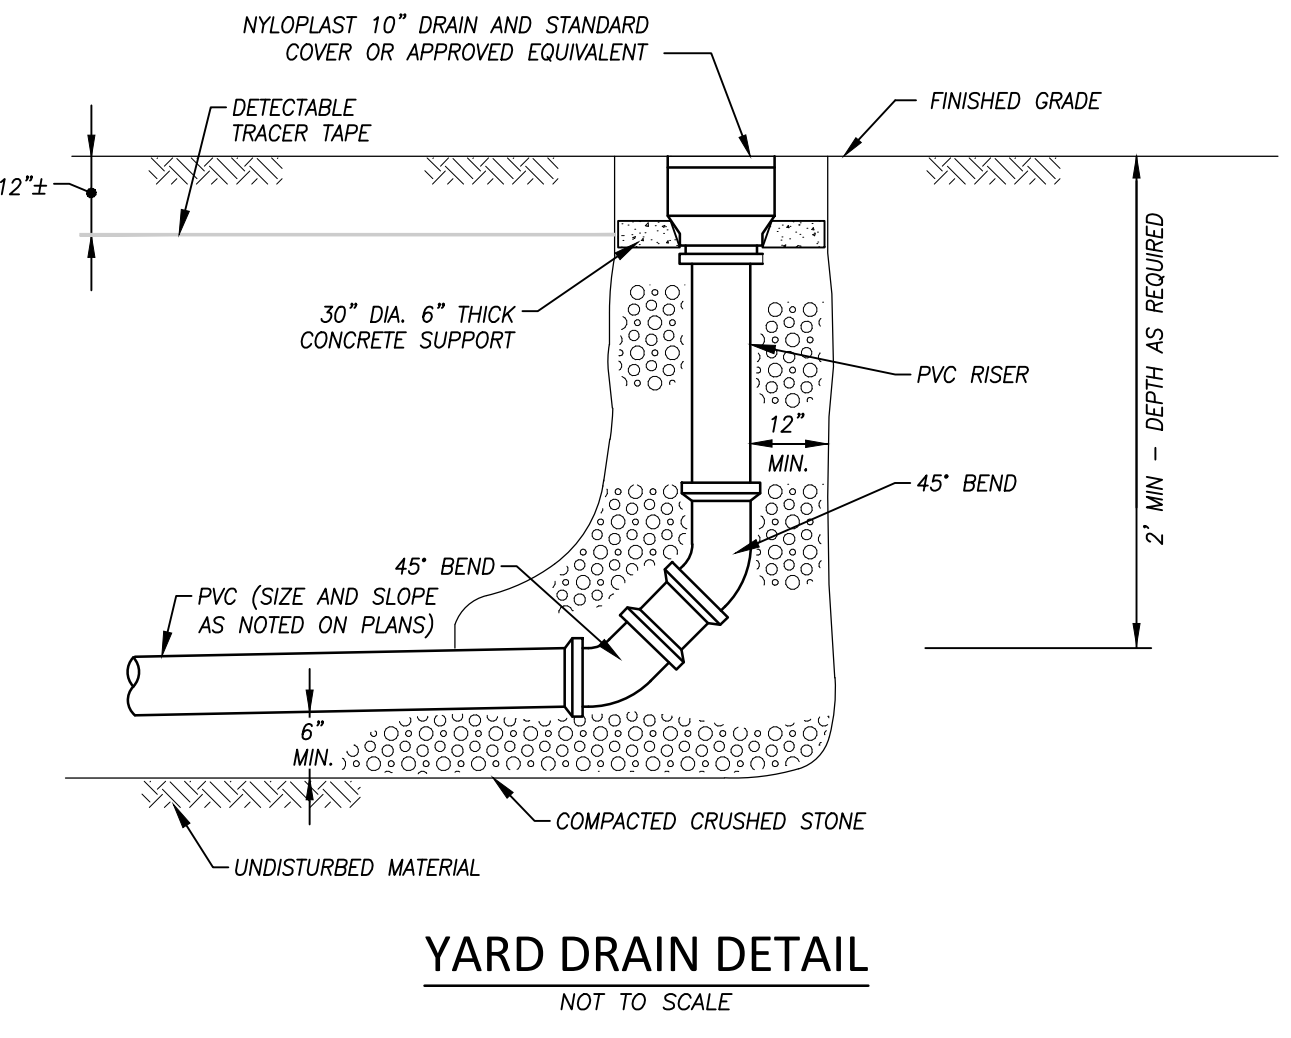


YARD DRAIN DETAIL
NOT TO SCALE

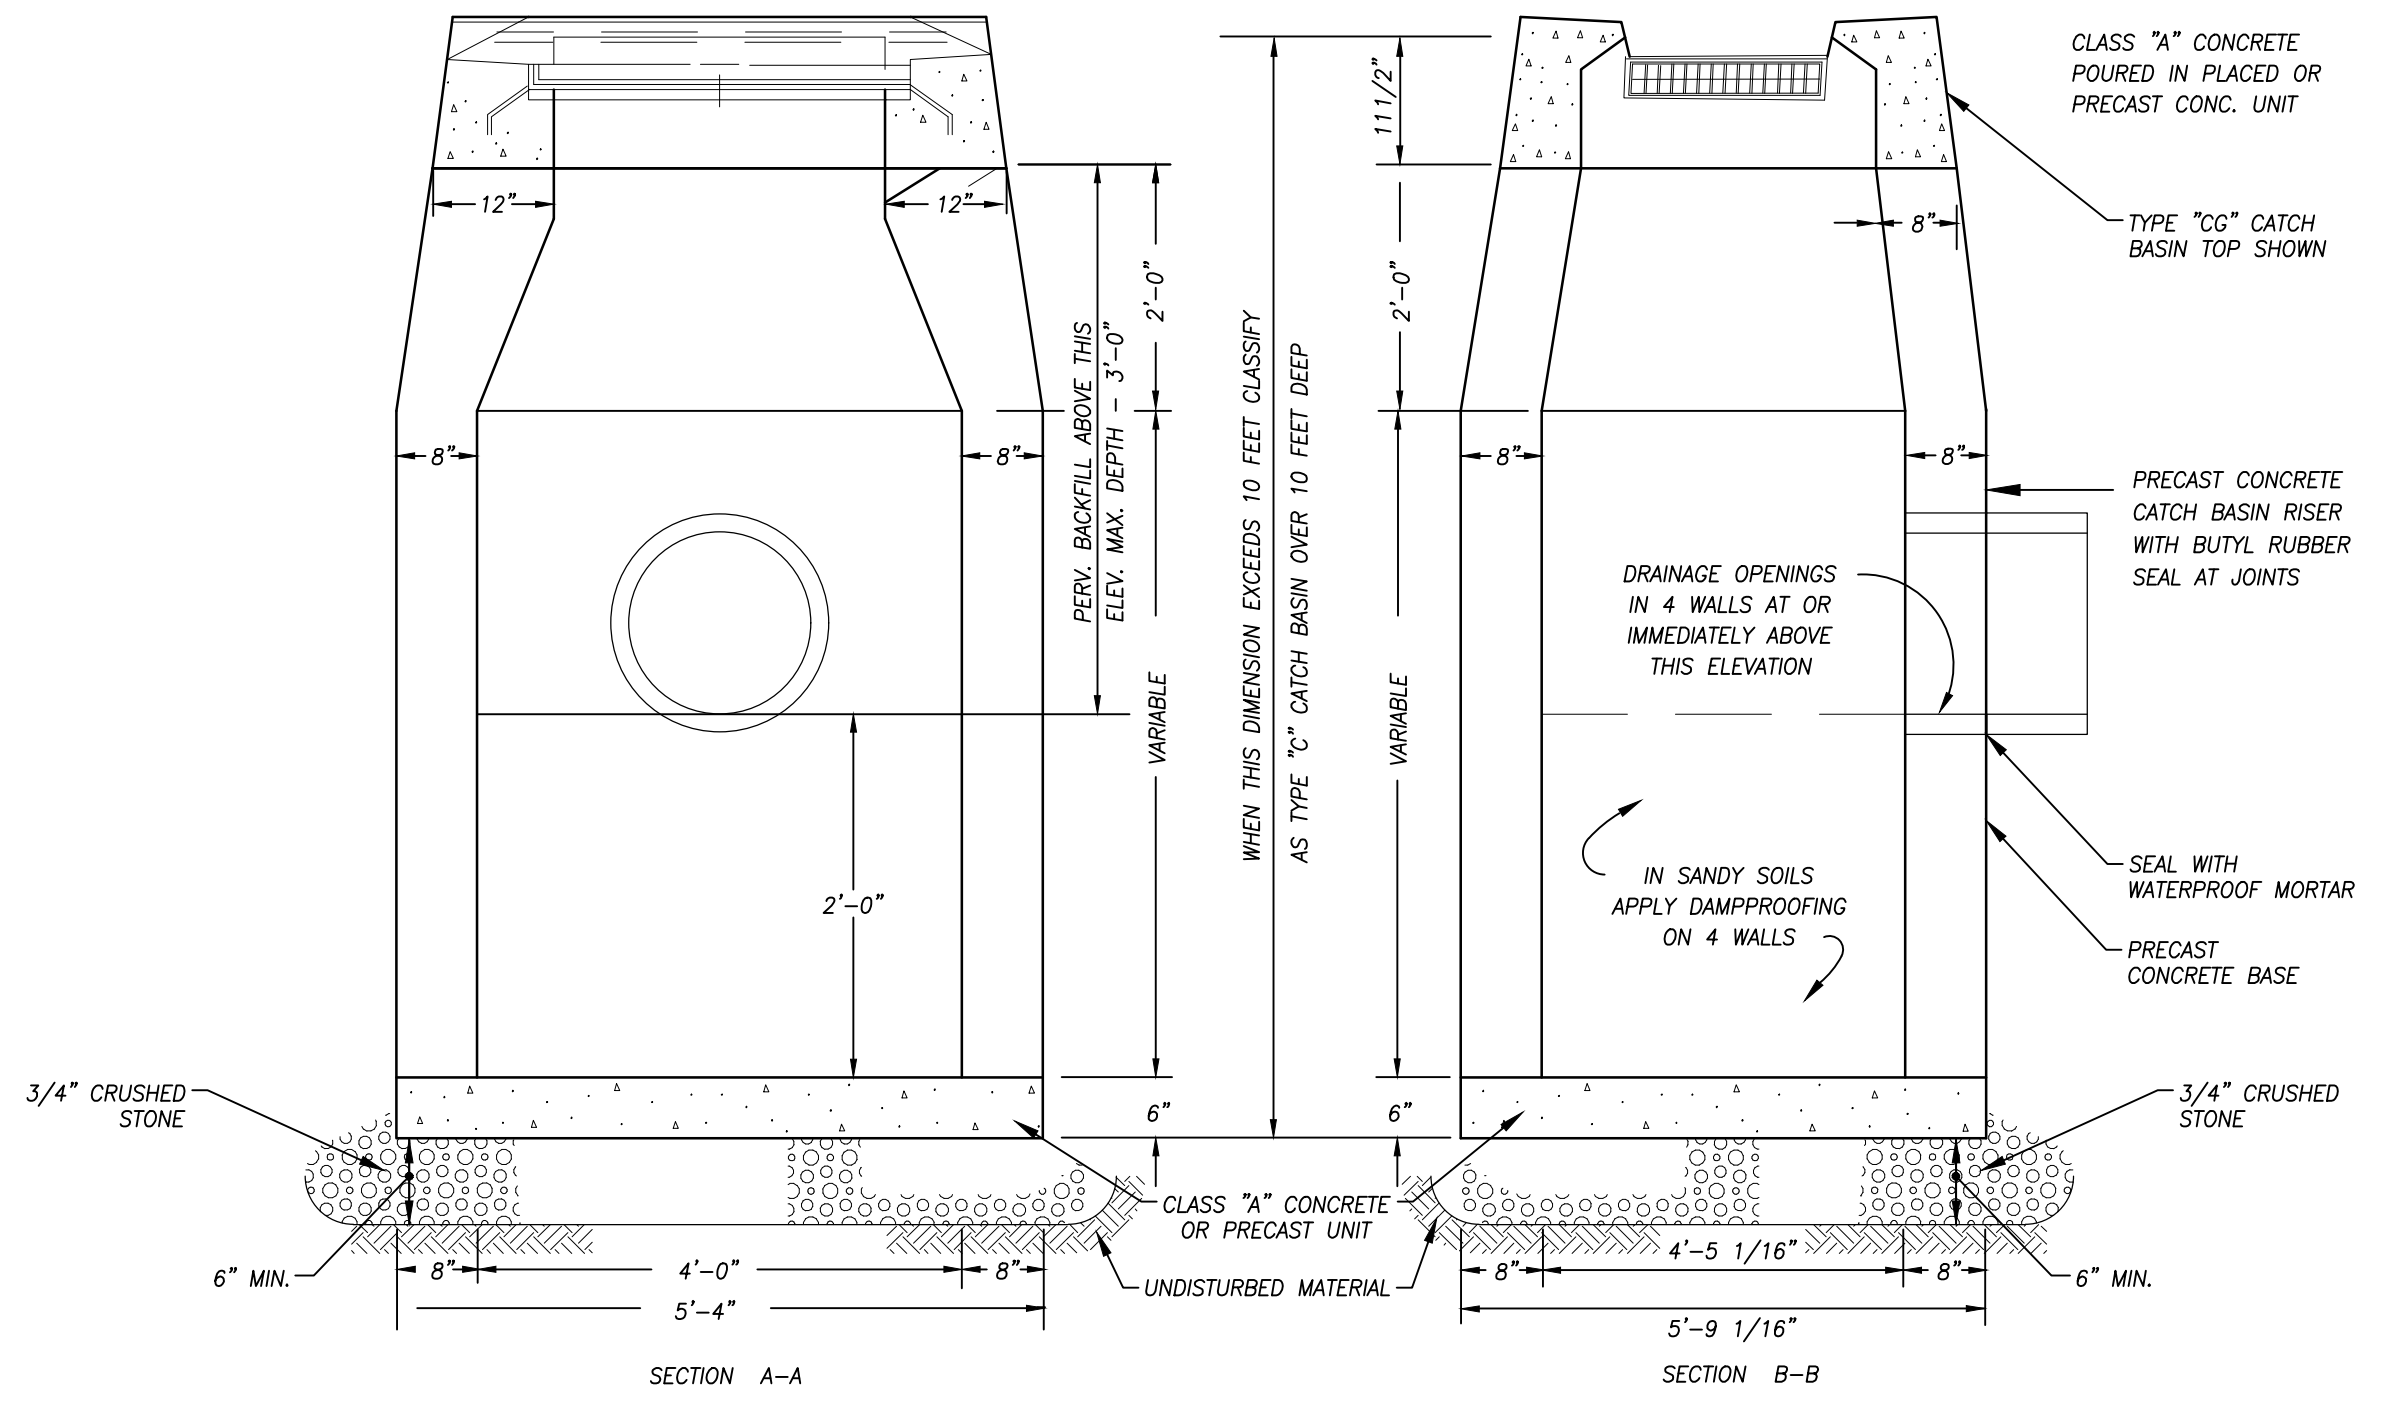


PRECAST CATCH BASIN DETAIL
NOT TO SCALE

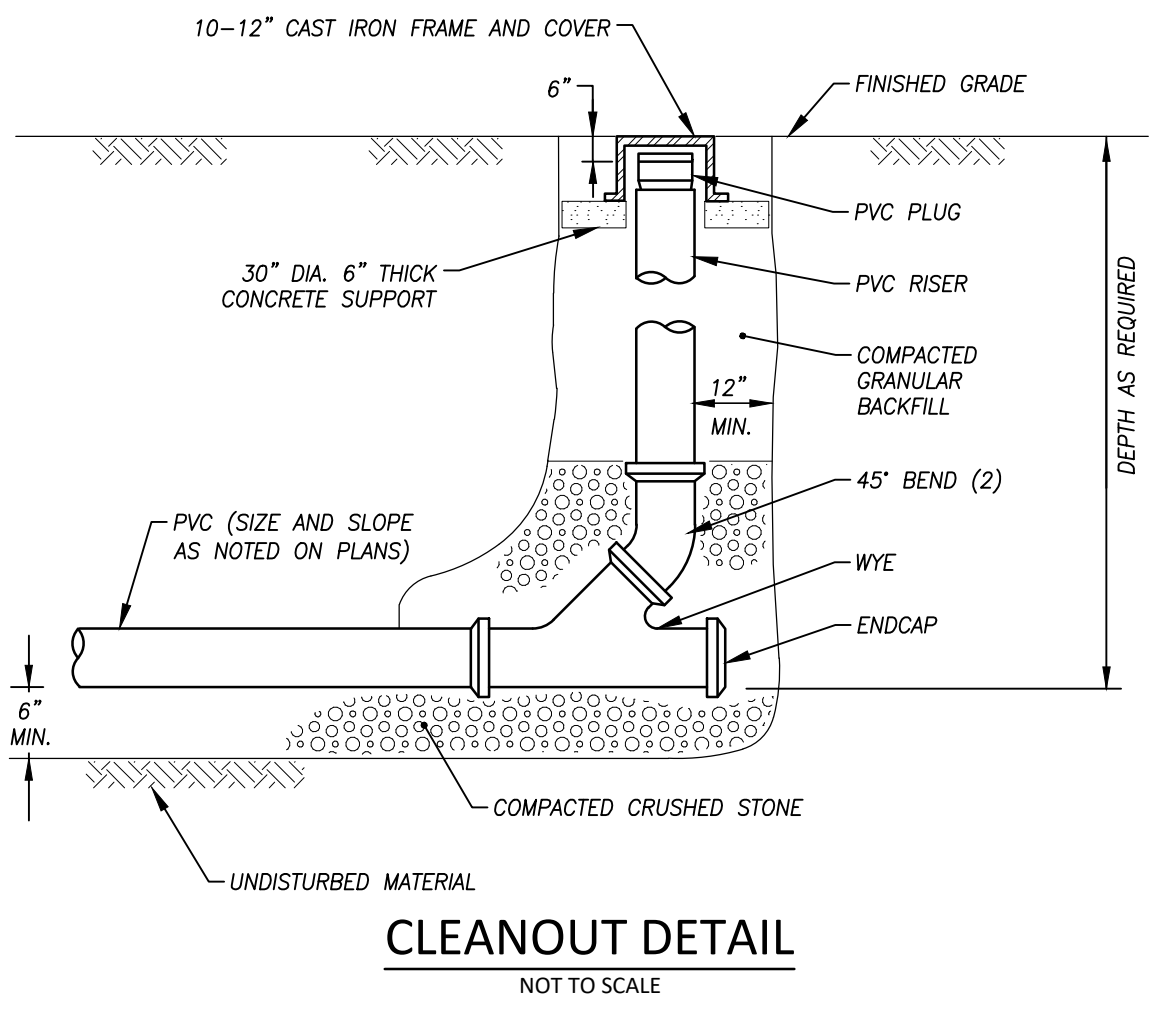


CLEANOUT DETAIL
NOT TO SCALE

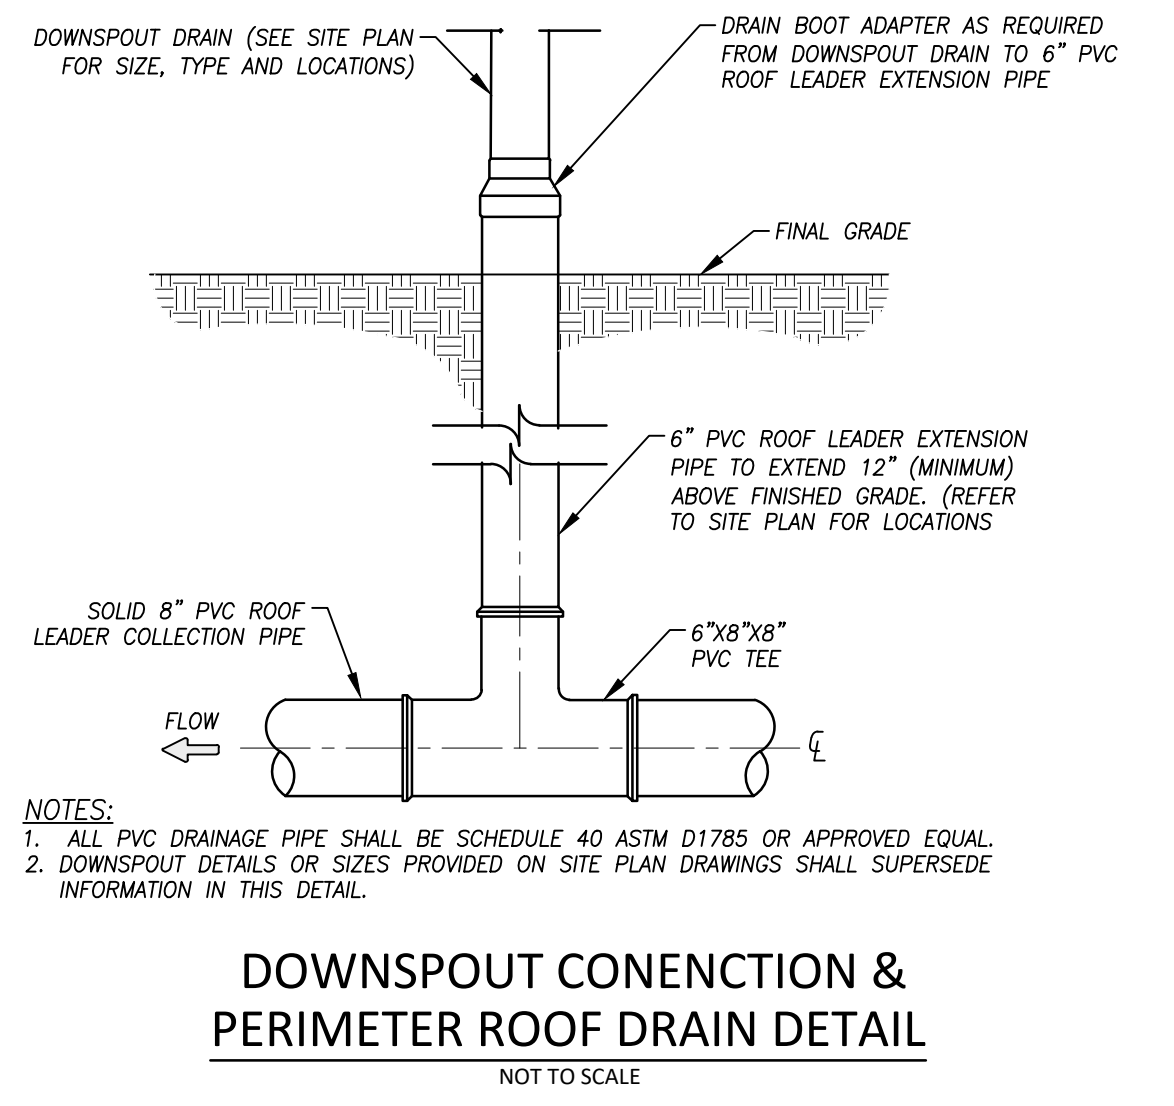


DOWNSPOUT CONNECTION & PERIMETER ROOF DRAIN DETAIL
NOT TO SCALE

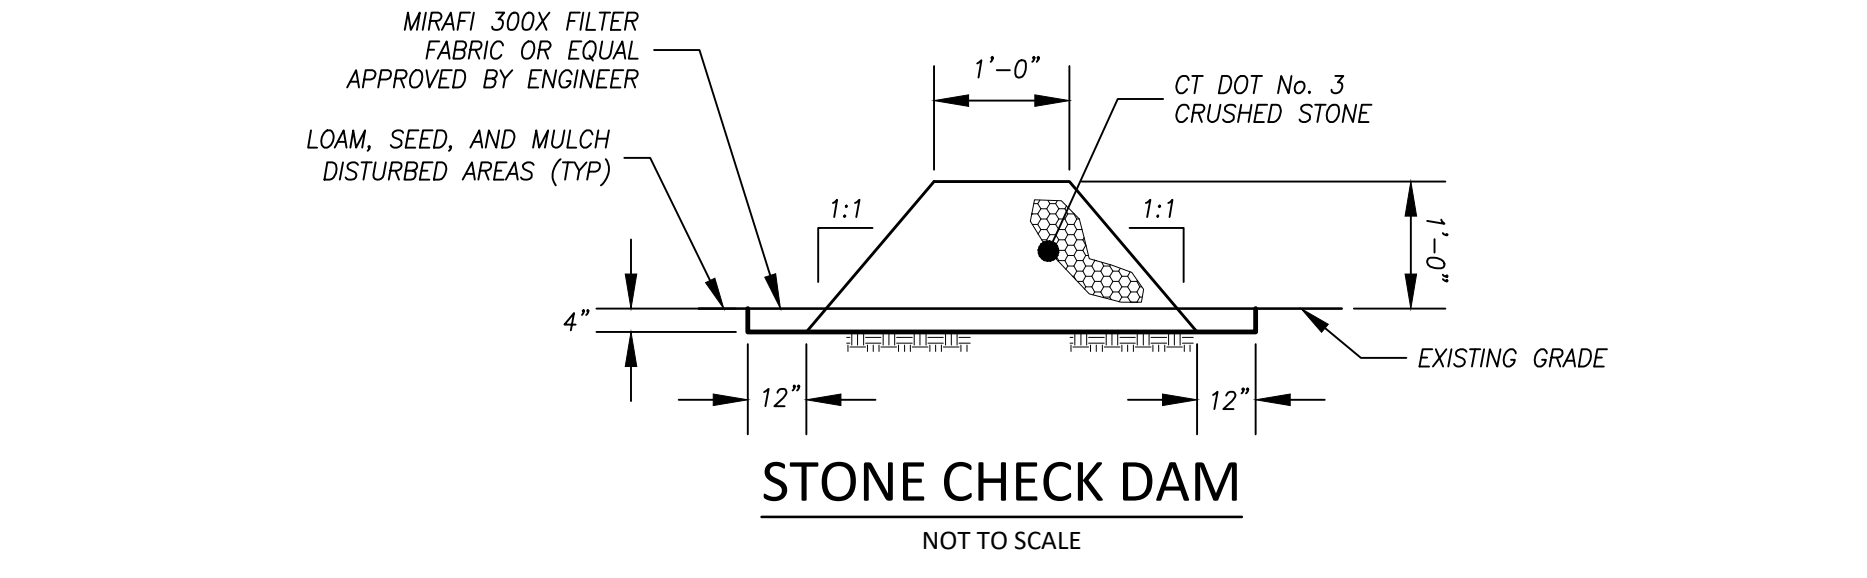


STONE CHECK DAM
NOT TO SCALE

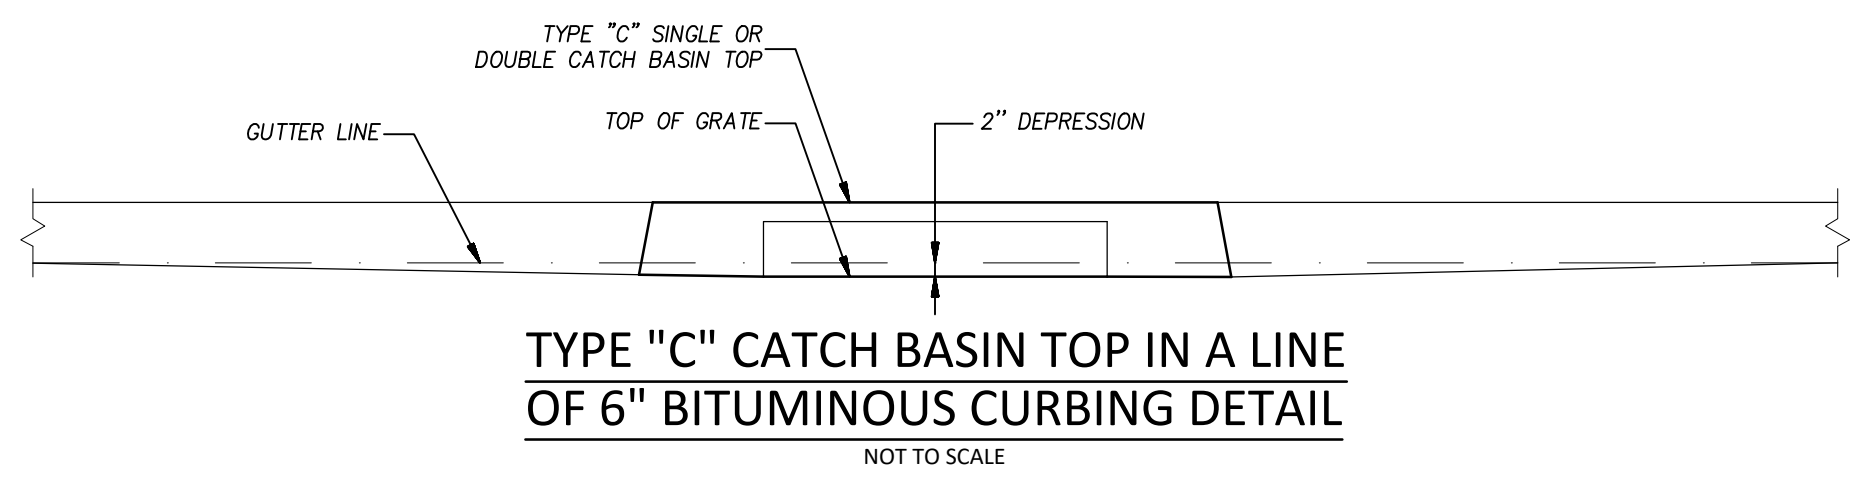

TYPE 'C' CATCH BASIN TOP IN A LINE OF 6\"/>

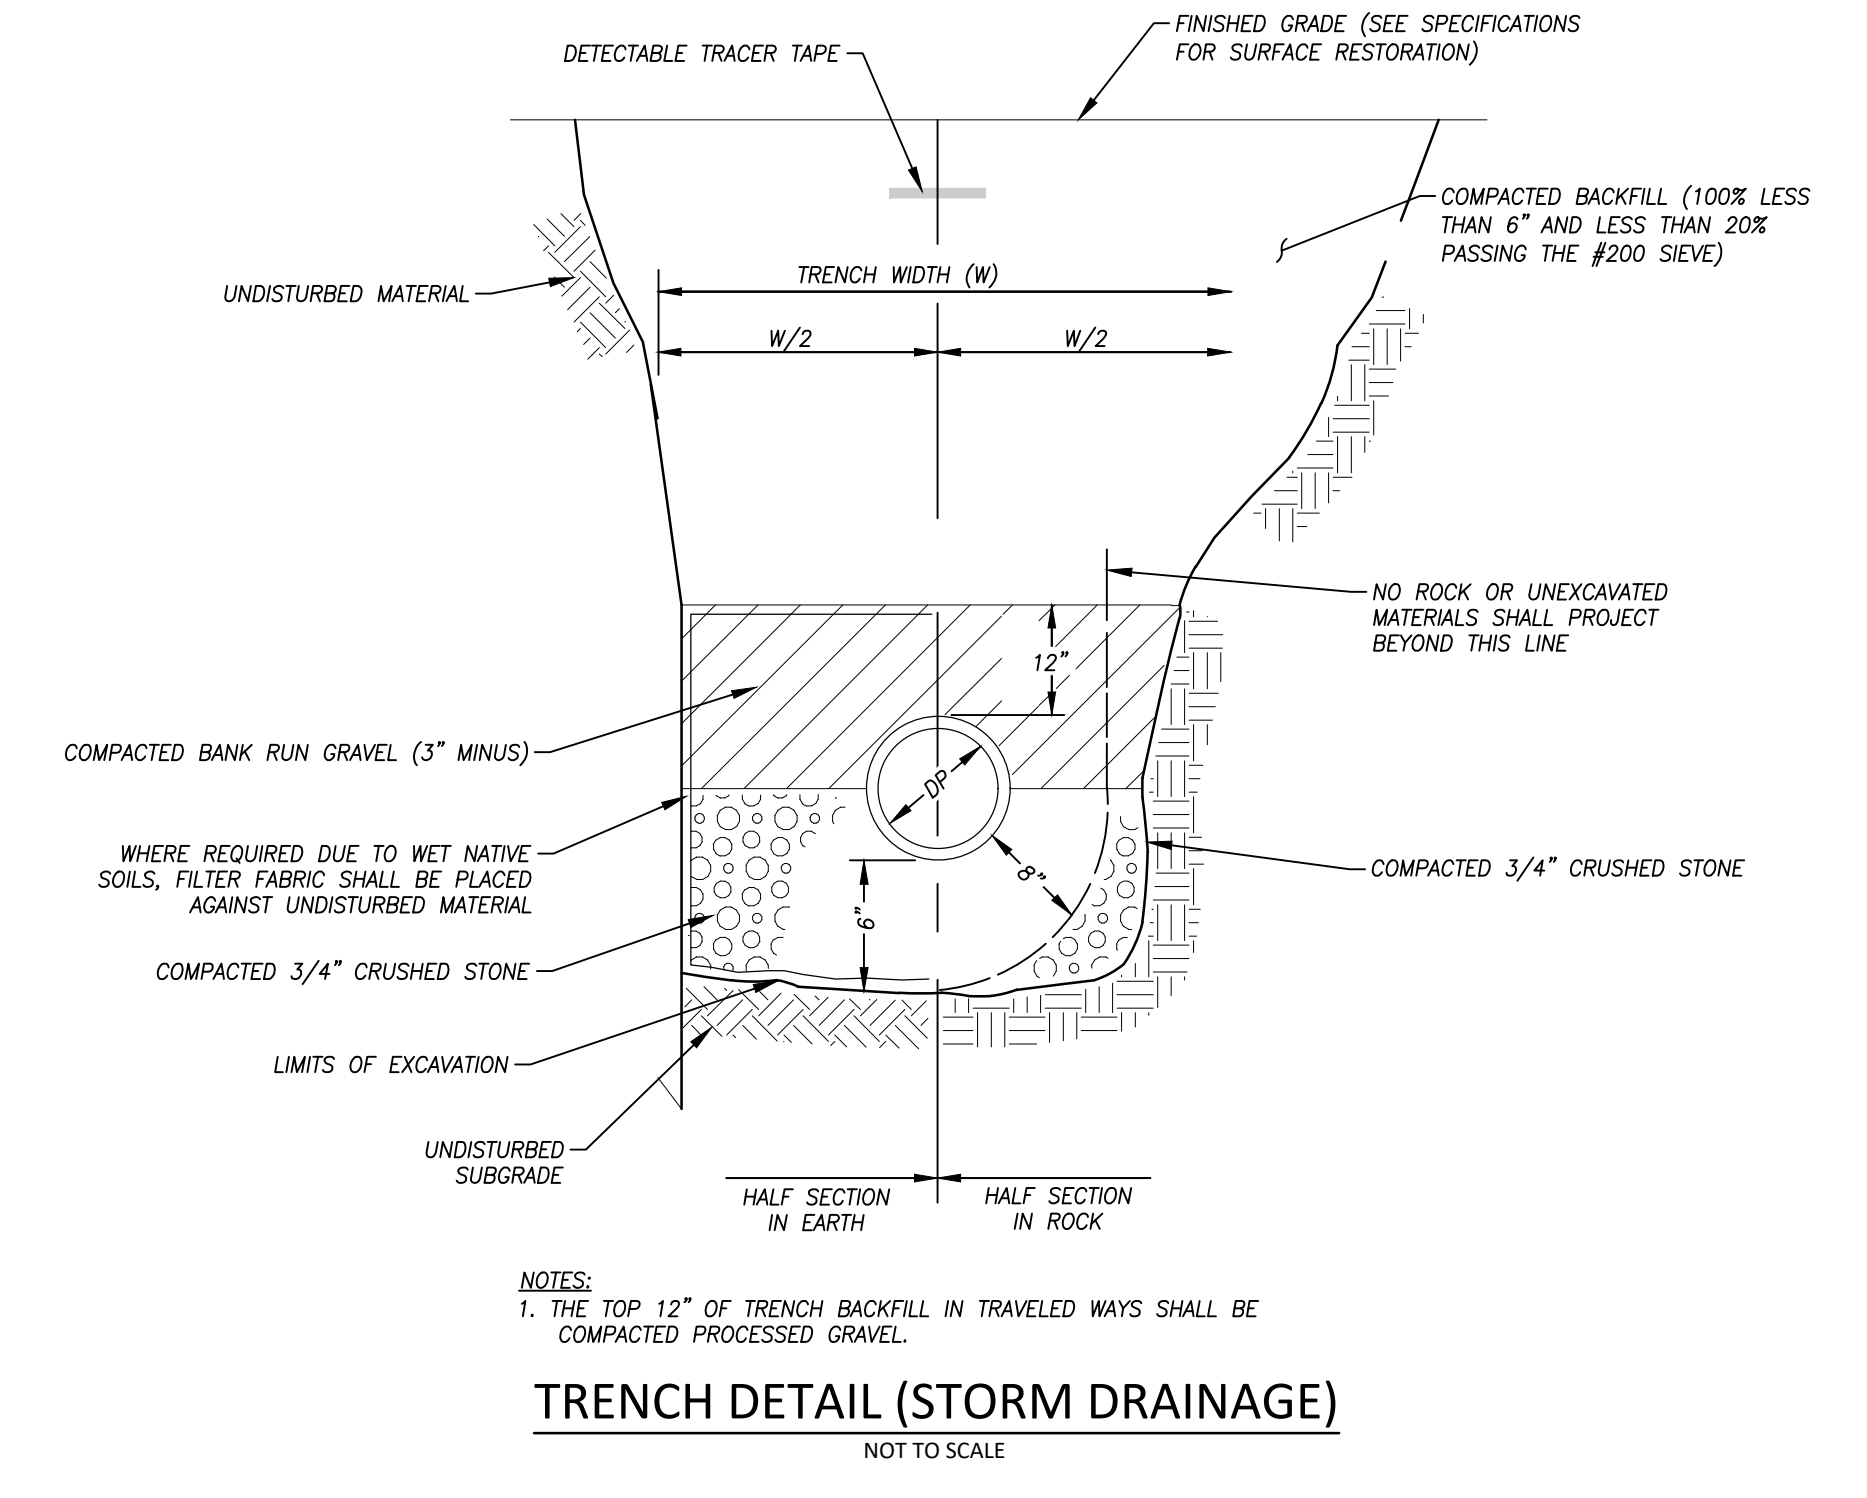

TRENCH DETAIL (STORM DRAINAGE)
NOT TO SCALE

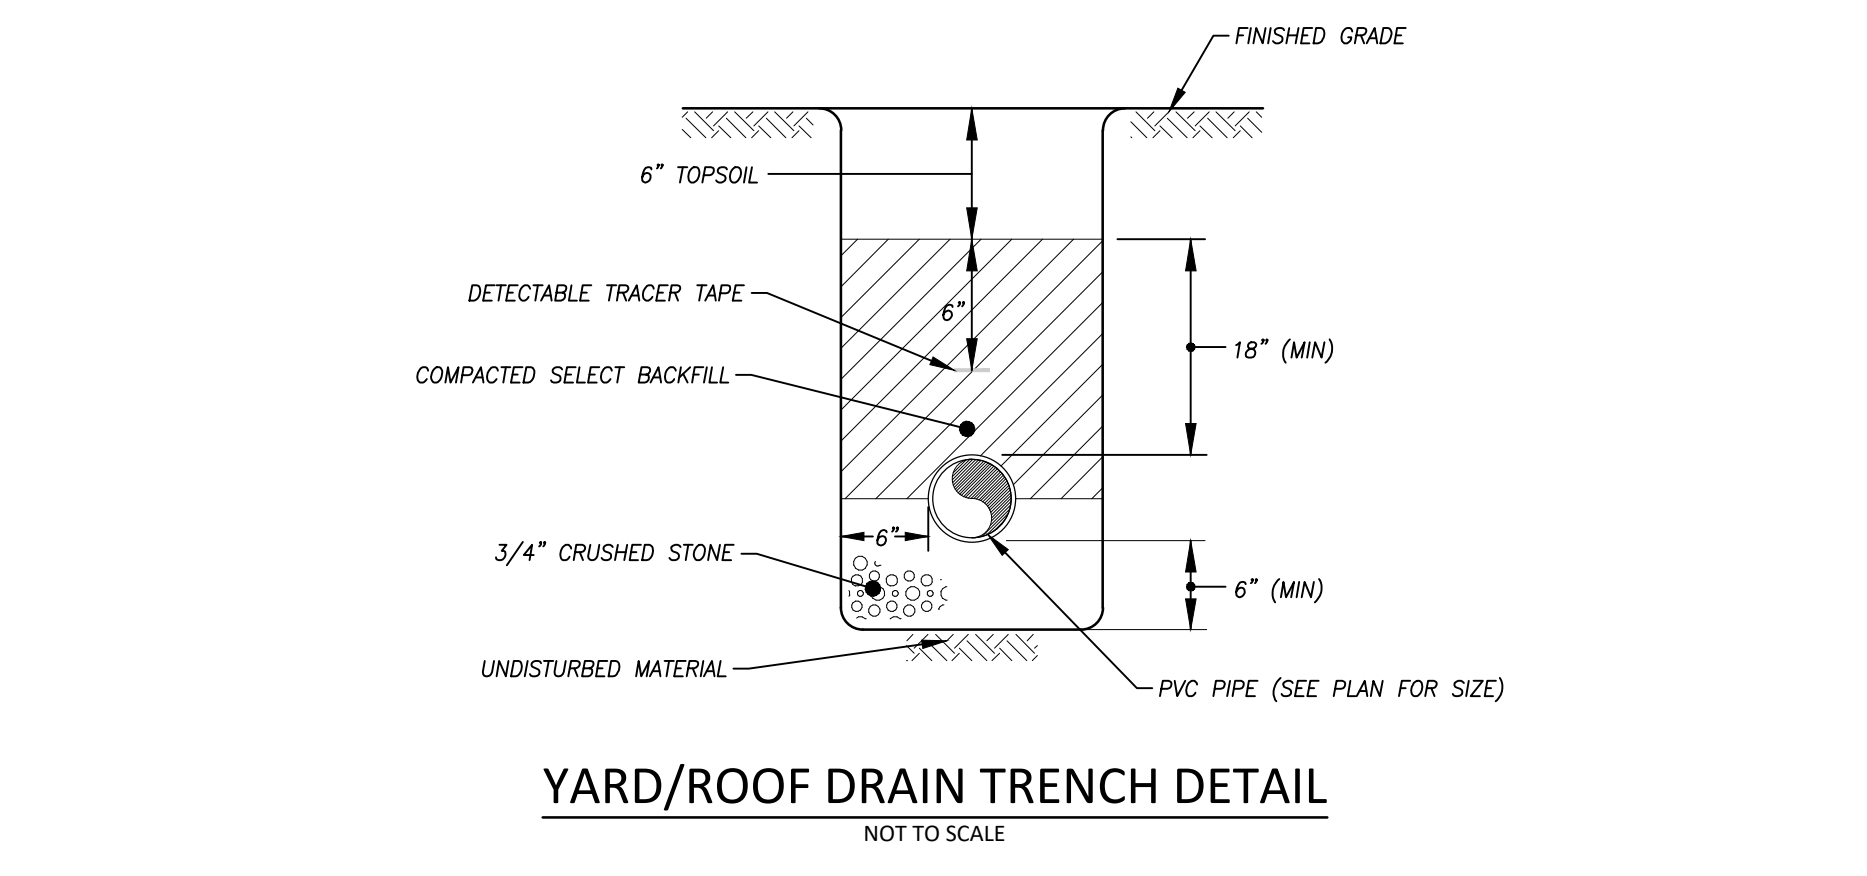

YARD/ROOF DRAIN TRENCH DETAIL
NOT TO SCALE


- NOTES:**
 1. ALL PVC DRAINAGE PIPE SHALL BE SCHEDULE 40 ASTM D1785 OR APPROVED EQUAL.
 2. DOWNSPOUT DETAILS OR SIZES PROVIDED ON SITE PLAN DRAWINGS SHALL SUPERSEDE INFORMATION IN THIS DETAIL.

Salt Pond Apartments at Edgewater Hill
 "Construction Details"
 Prepared for
 Edgewater Hill Enterprises, LLC
 000 East High Street - East Hampton, Connecticut


SCALE: As Noted
 DATE: December 2020
 JOB I.D. NO. 20-2853
Revisions
 Rev. A - IWWC Comments & Stormwater Quality - 1/18/21
 Rev. B - Per IWWC Conditions of Approval - 1/29/21

NOT FOR CONSTRUCTION
1/29/2021


PLAN NOTES
 1. SEE COVER SHEET FOR ENGINEER AND SURVEYOR SIGNATURES AND SEALS.
 2. SEE SHEET 2 FOR LEGEND & ABBREVIATIONS.

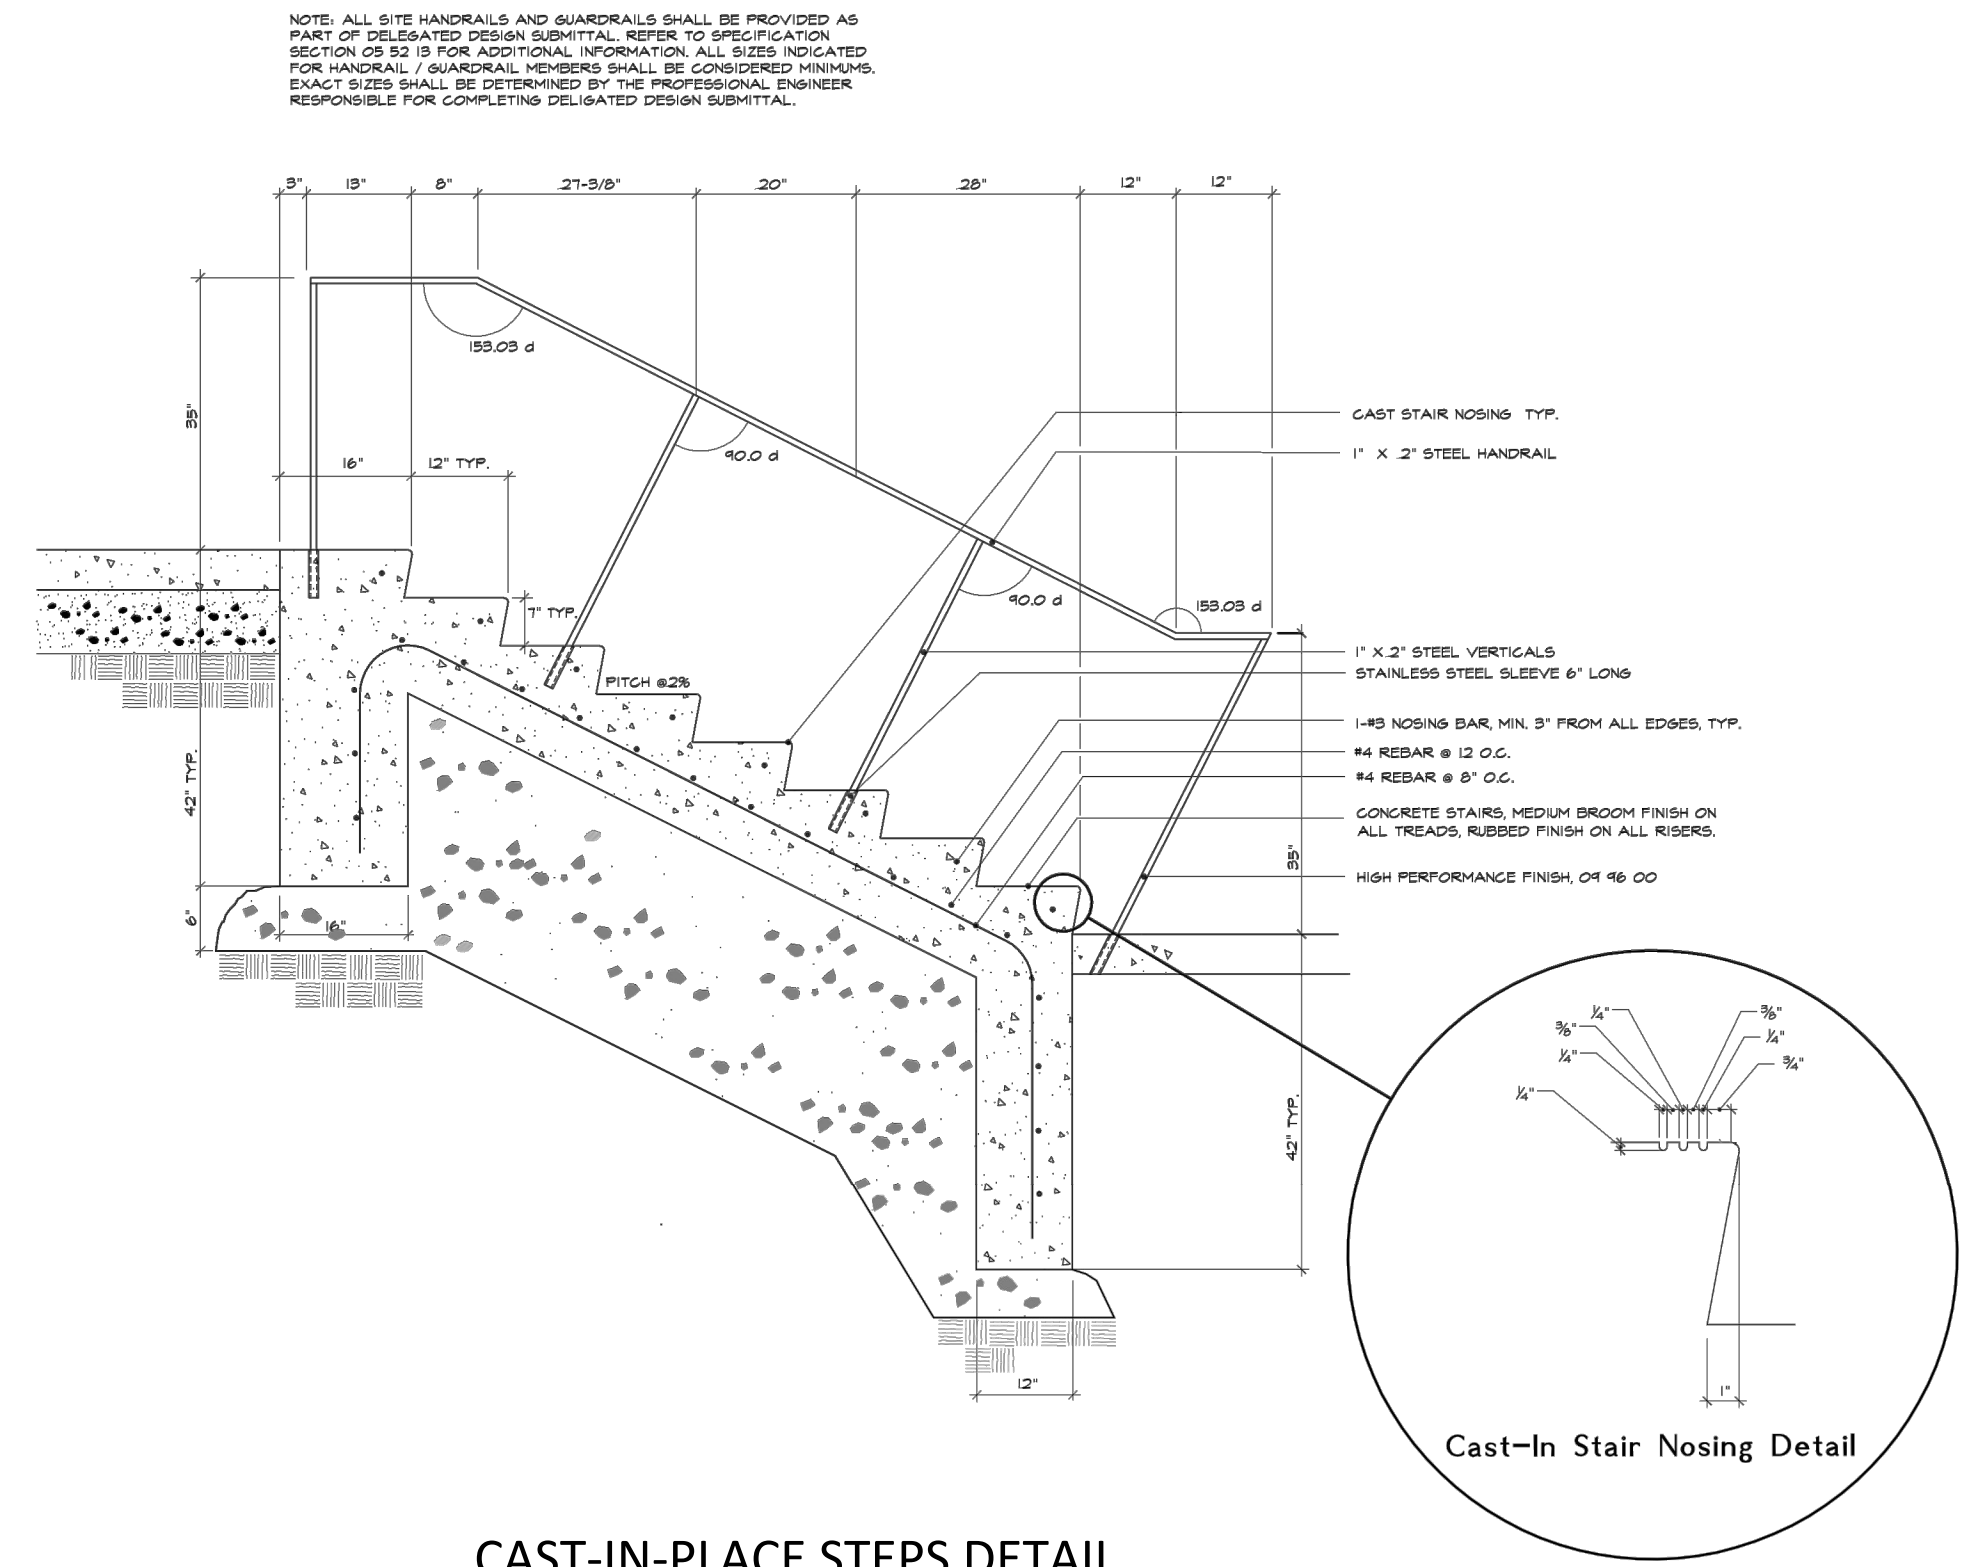


CAST-IN-PLACE STEPS DETAIL
NOT TO SCALE

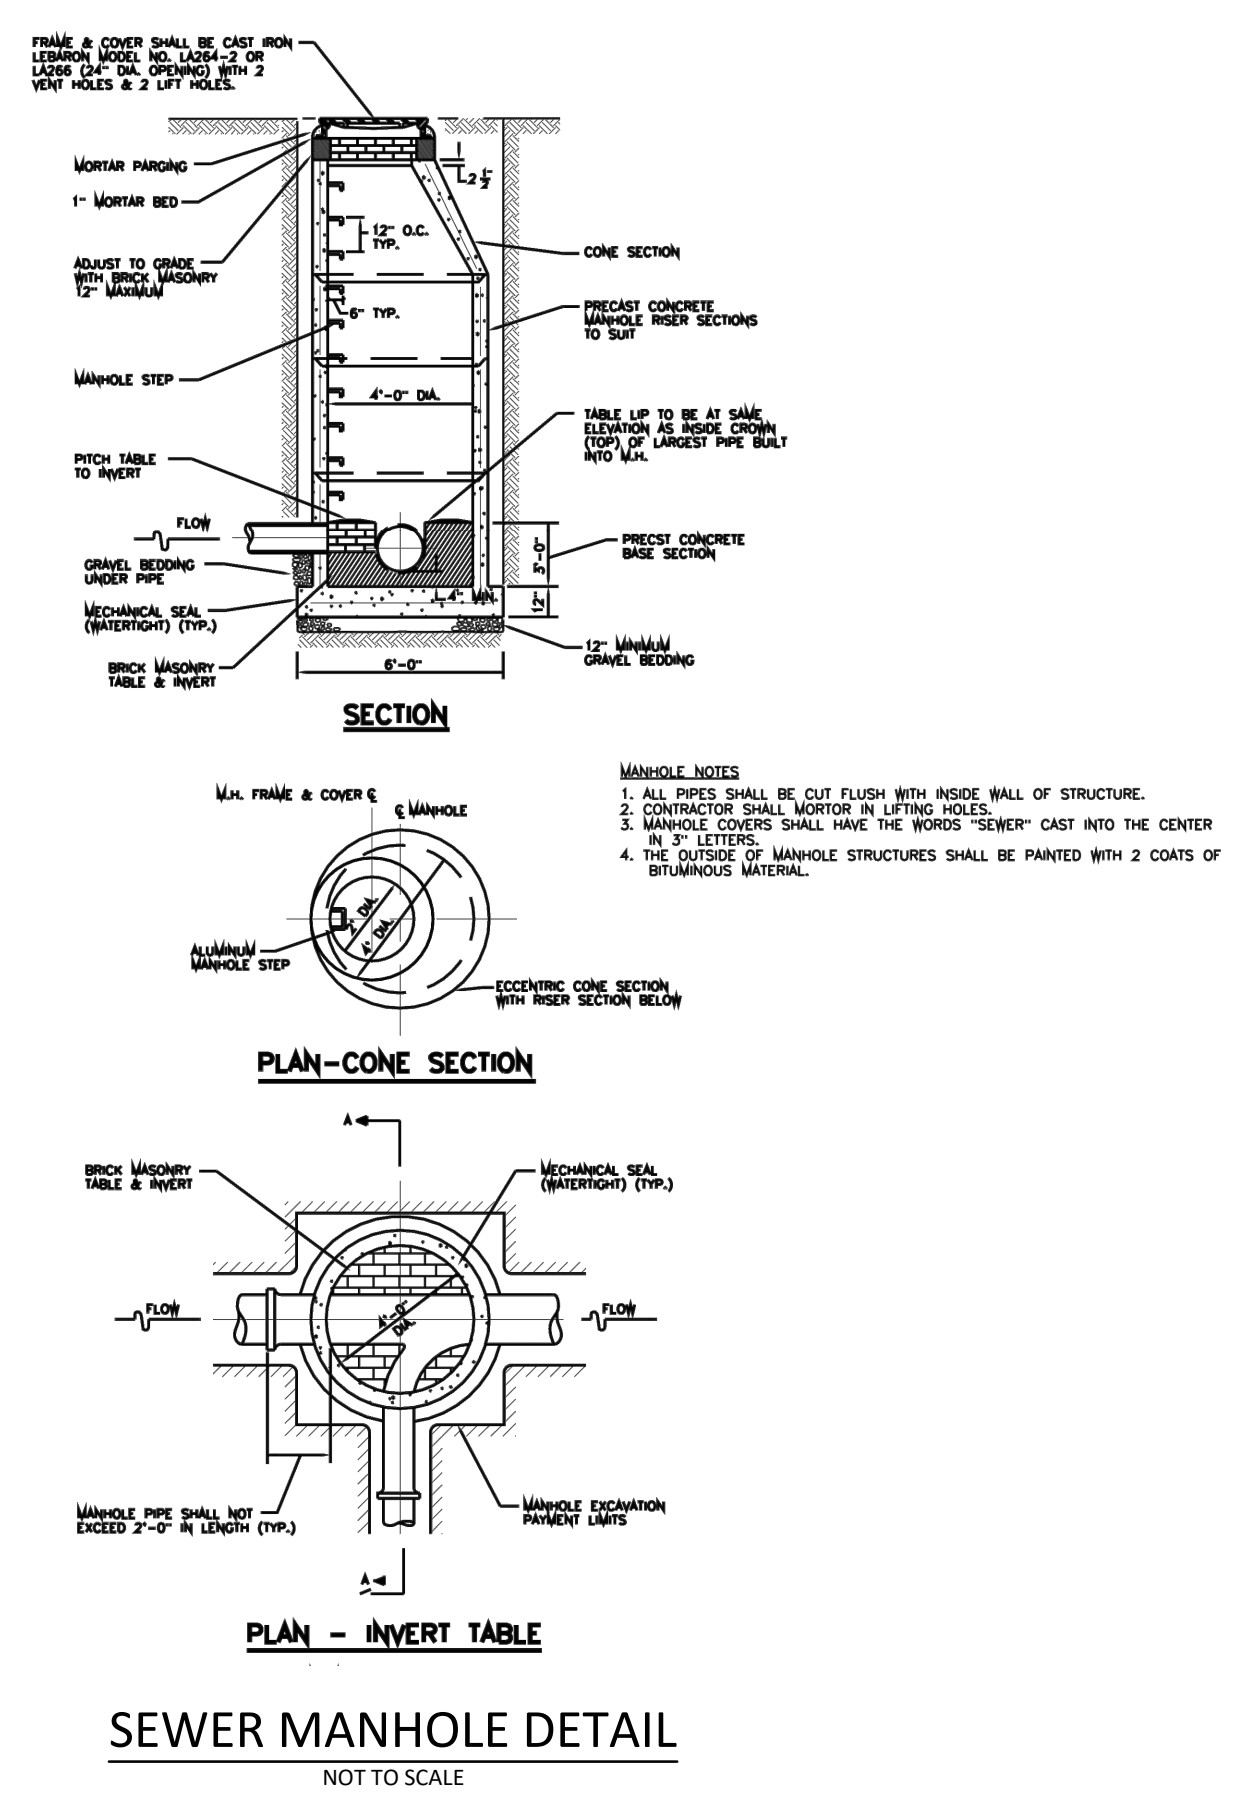

SEWER MANHOLE DETAIL
NOT TO SCALE

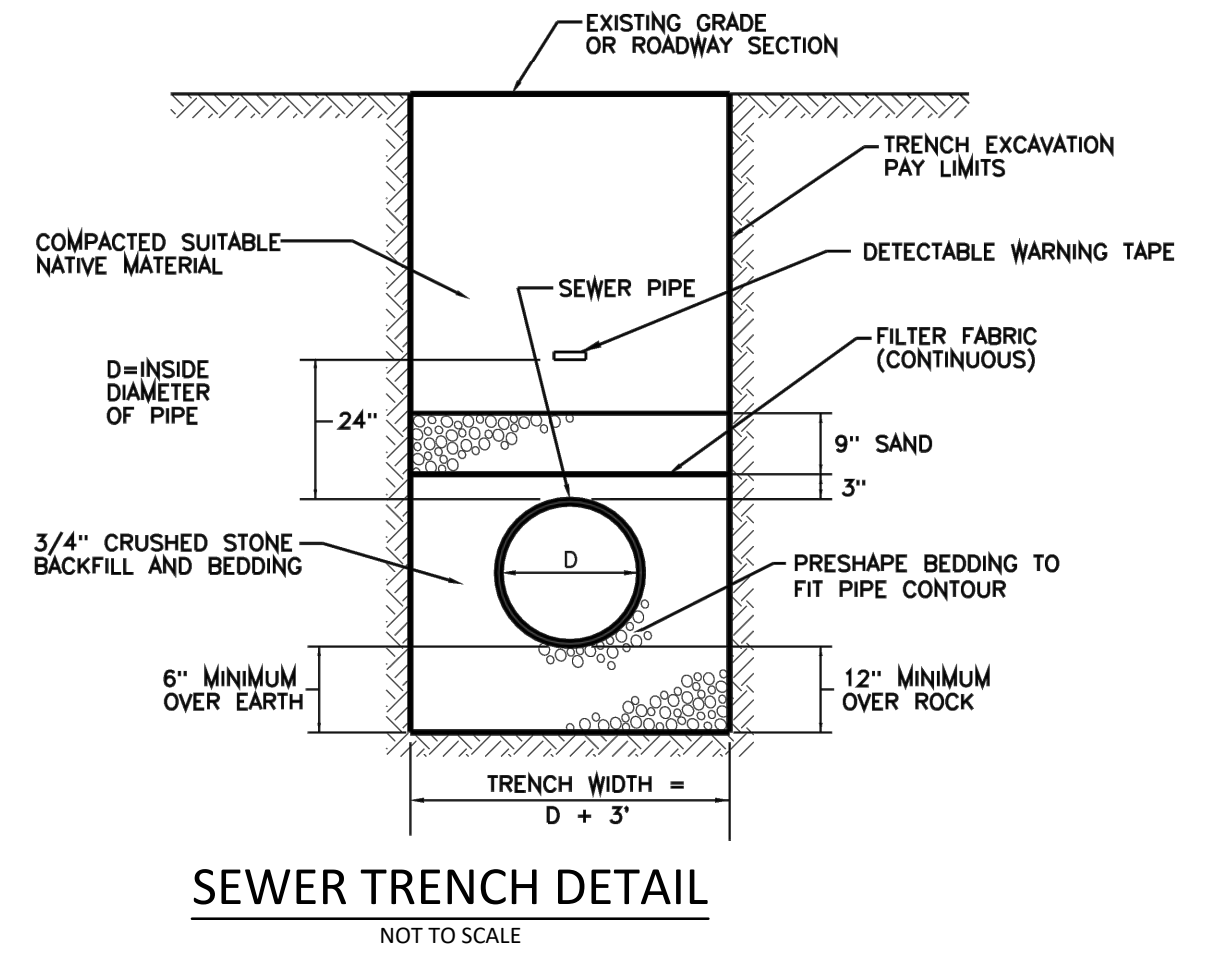


SEWER TRENCH DETAIL
NOT TO SCALE

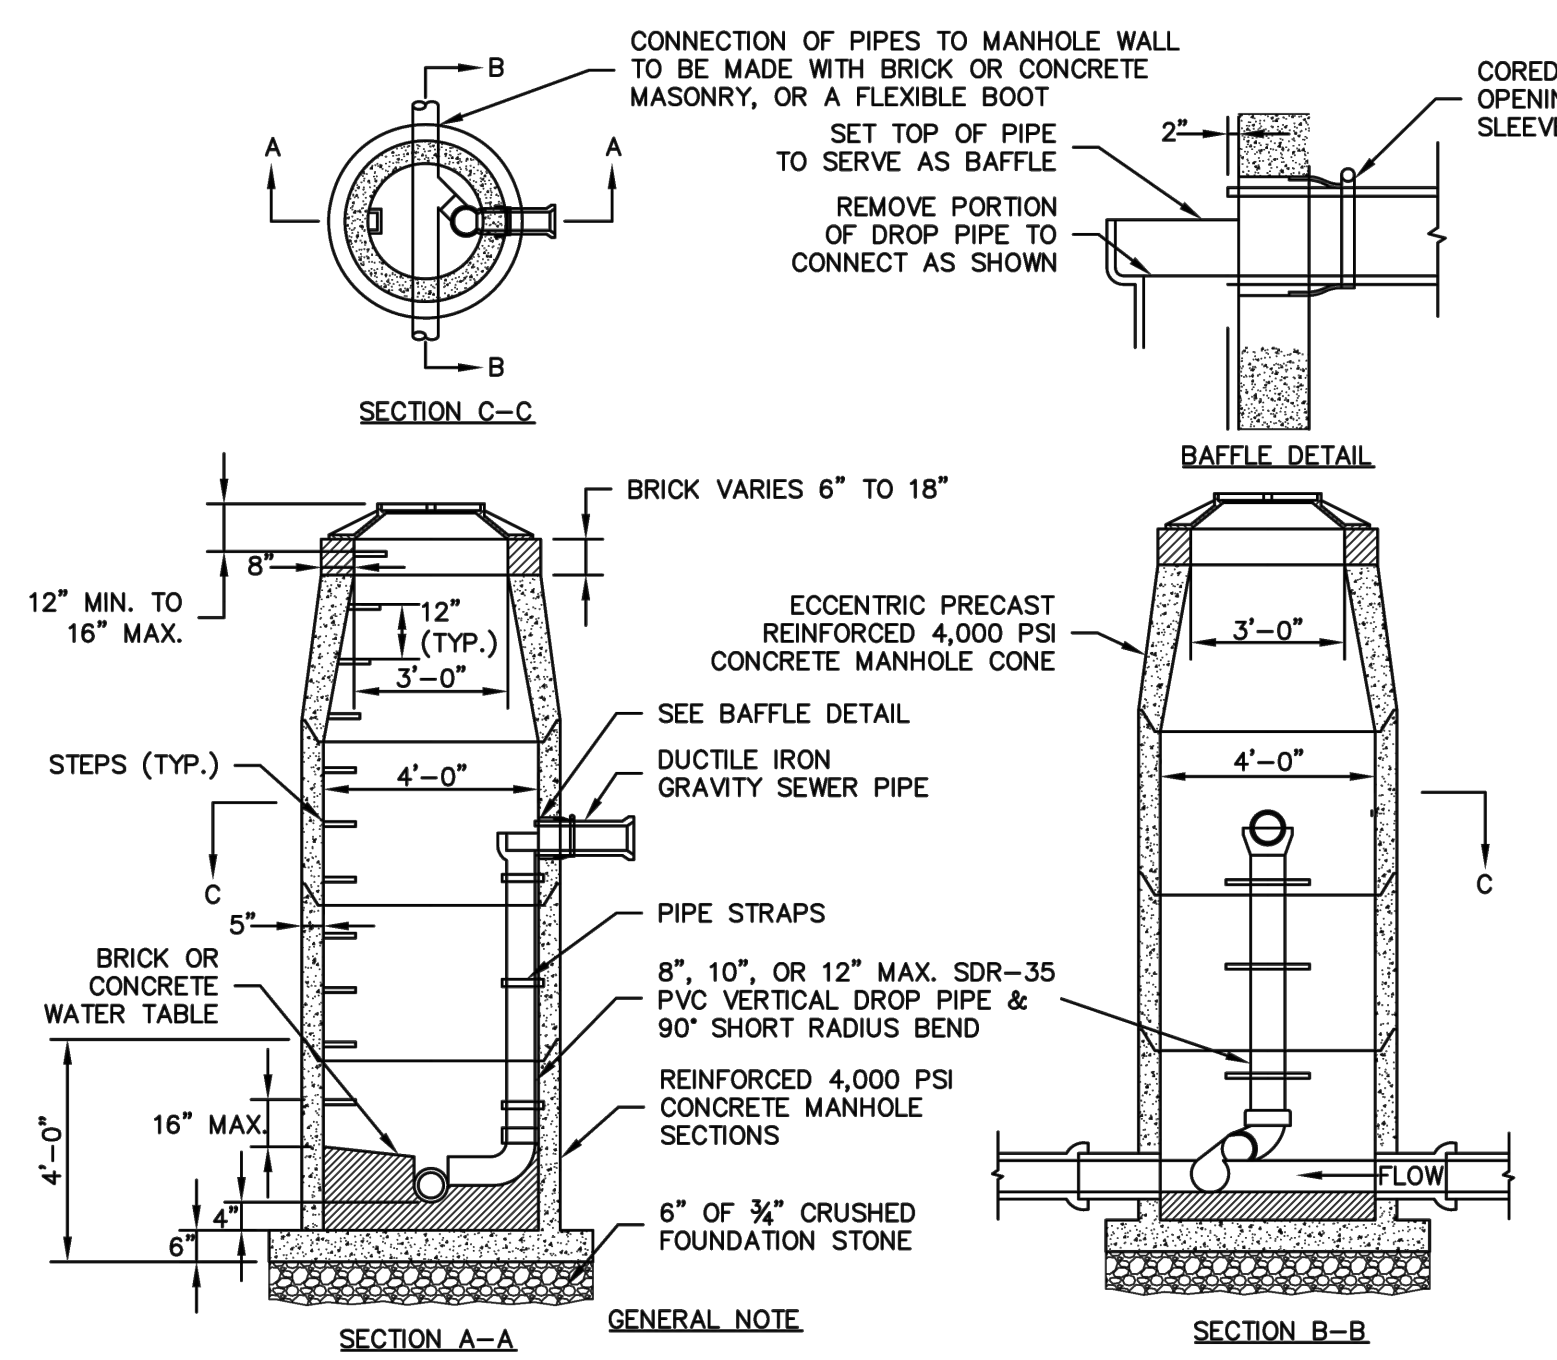

SEWER MANHOLE DROP CONNECTION DETAIL
NOT TO SCALE

- ① WHENEVER POSSIBLE MAINTAIN A MINIMUM 10' SEPARATION FROM GRAVITY STORM OR SEWER LINES. ALWAYS MAINTAIN A MINIMUM 10' HORIZONTAL SEPARATION FROM FORCE SEWER MAIN.
- ② IF 10' SEPARATION IS NOT POSSIBLE MAINTAIN A MINIMUM OF 18" HORIZONTAL SEPARATION WITH BOTTOM OF WATER MAIN A MINIMUM 18" ABOVE TOP OF STORM OR SEWER LINE.
- ③ IF MINIMUM SEPARATION IS NOT POSSIBLE USE A MINIMUM CLASS 52 DUCTILE IRON PIPE WITH POLYETHYLENE ENCASEMENT, OR CONCRETE ENCASEMENT OF GRAVITY LINE.
- ④ WHEN CROSSING GRAVITY LINES MAINTAIN A MINIMUM 18" VERTICAL SEPARATION WITH JOINTS SPACED AS FAR AS POSSIBLE FROM GRAVITY LINES.

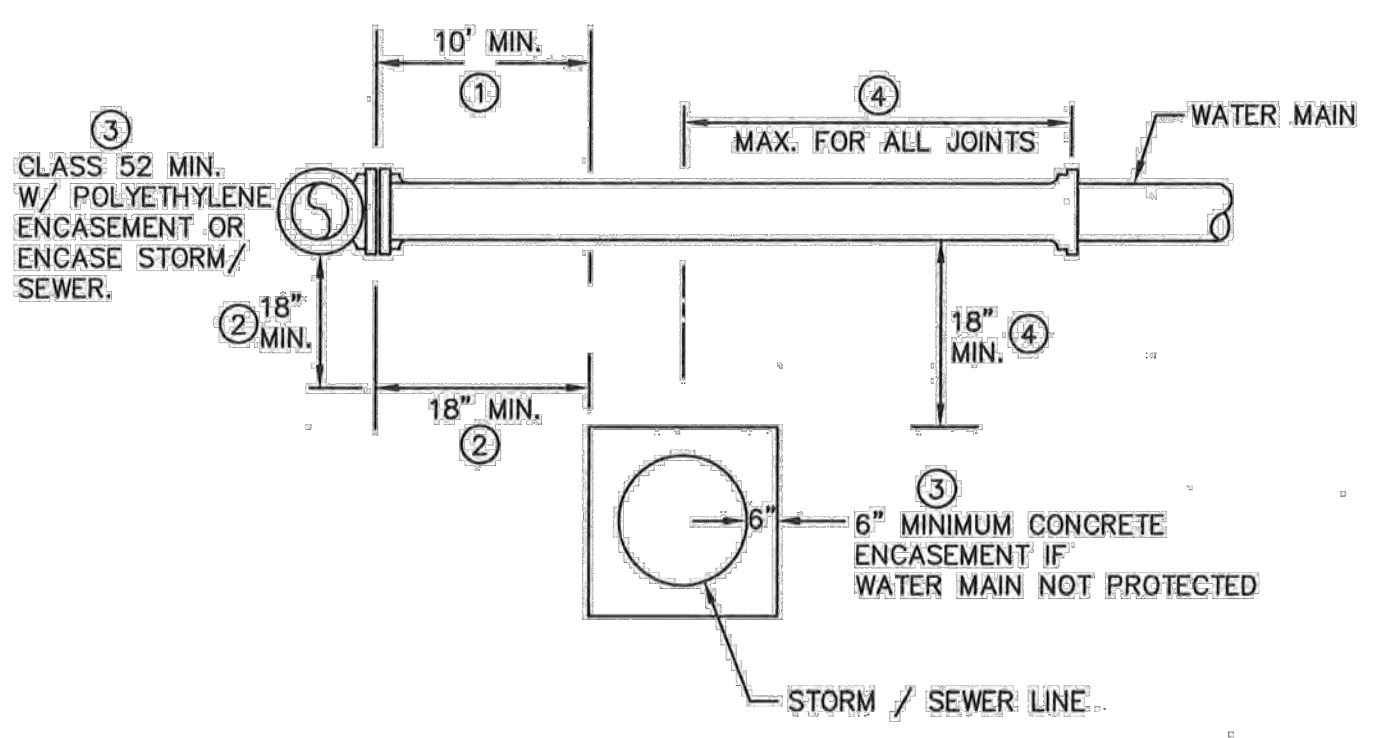

SEPARATION BETWEEN WATER AND SEWER LINES
NOT TO SCALE

SCALE:	As Noted
DATE:	December 2020
JOB I.D. NO.:	20-2853
Revisions	
Rev. A -	IWWC Comments & Stormwater Quality - 1/18/21
Rev. B -	Per IWWC Conditions of Approval - 1/29/21


SHEET NO.

24 / 25

NOT FOR CONSTRUCTION
1/29/2021


PLAN NOTES
1. SEE COVER SHEET FOR ENGINEER AND SURVEYOR SIGNATURES AND SEALS.
2. SEE SHEET 2 FOR LEGEND & ABBREVIATIONS.

P:\CIVIL 3D PROJECTS\2020\20-2853 EDGEGWATER-APARTMENTS\DWG\DESIGN\4 NOTES AND DETAILS.DWG

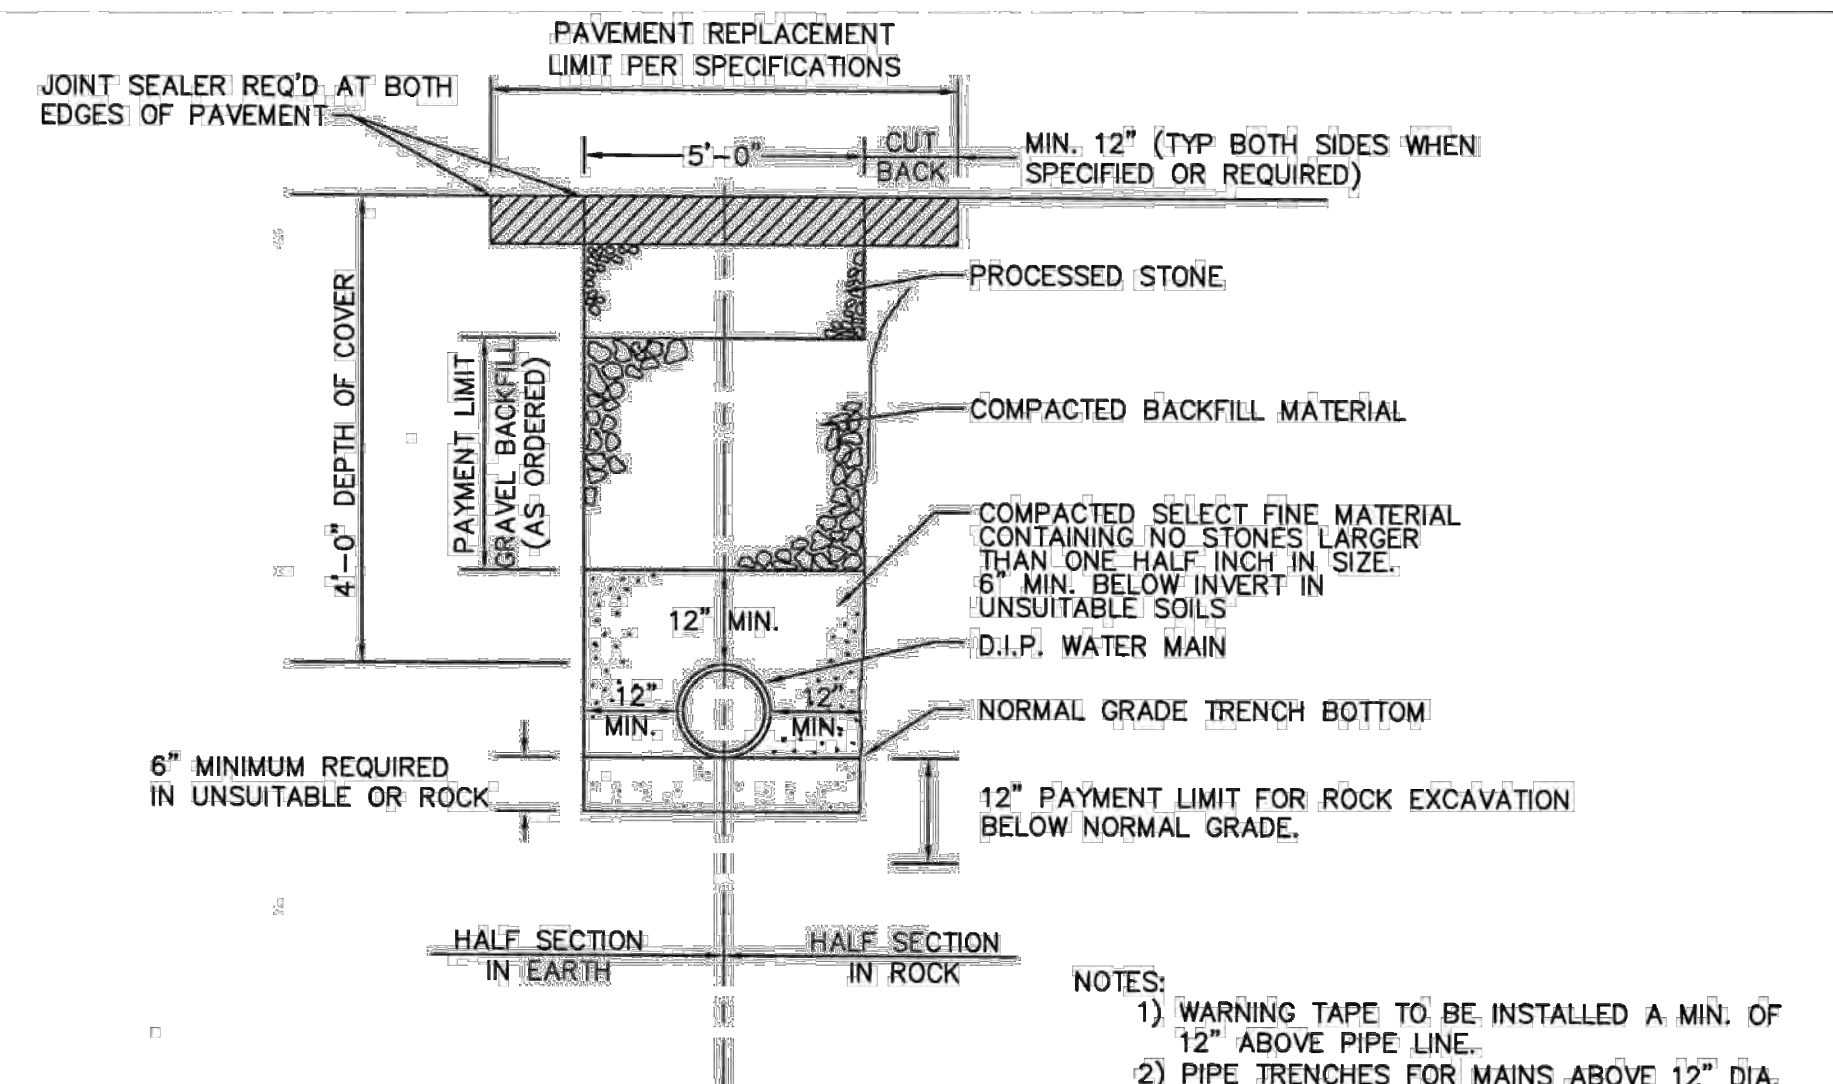


WATER MAIN INSTALLATION DETAIL
NOT TO SCALE

- NOTES:
- 1) WARNING TAPE TO BE INSTALLED A MIN. OF 12" ABOVE PIPE LINE.
 - 2) PIPE TRENCHES FOR MAINS ABOVE 12" DIA. WILL EXCEED 5 FT. TOTAL DEPTH.
 - 3) ALL DUCTILE IRON WATER MAIN AND FITTINGS ARE TO BE POLYWRAPPED.

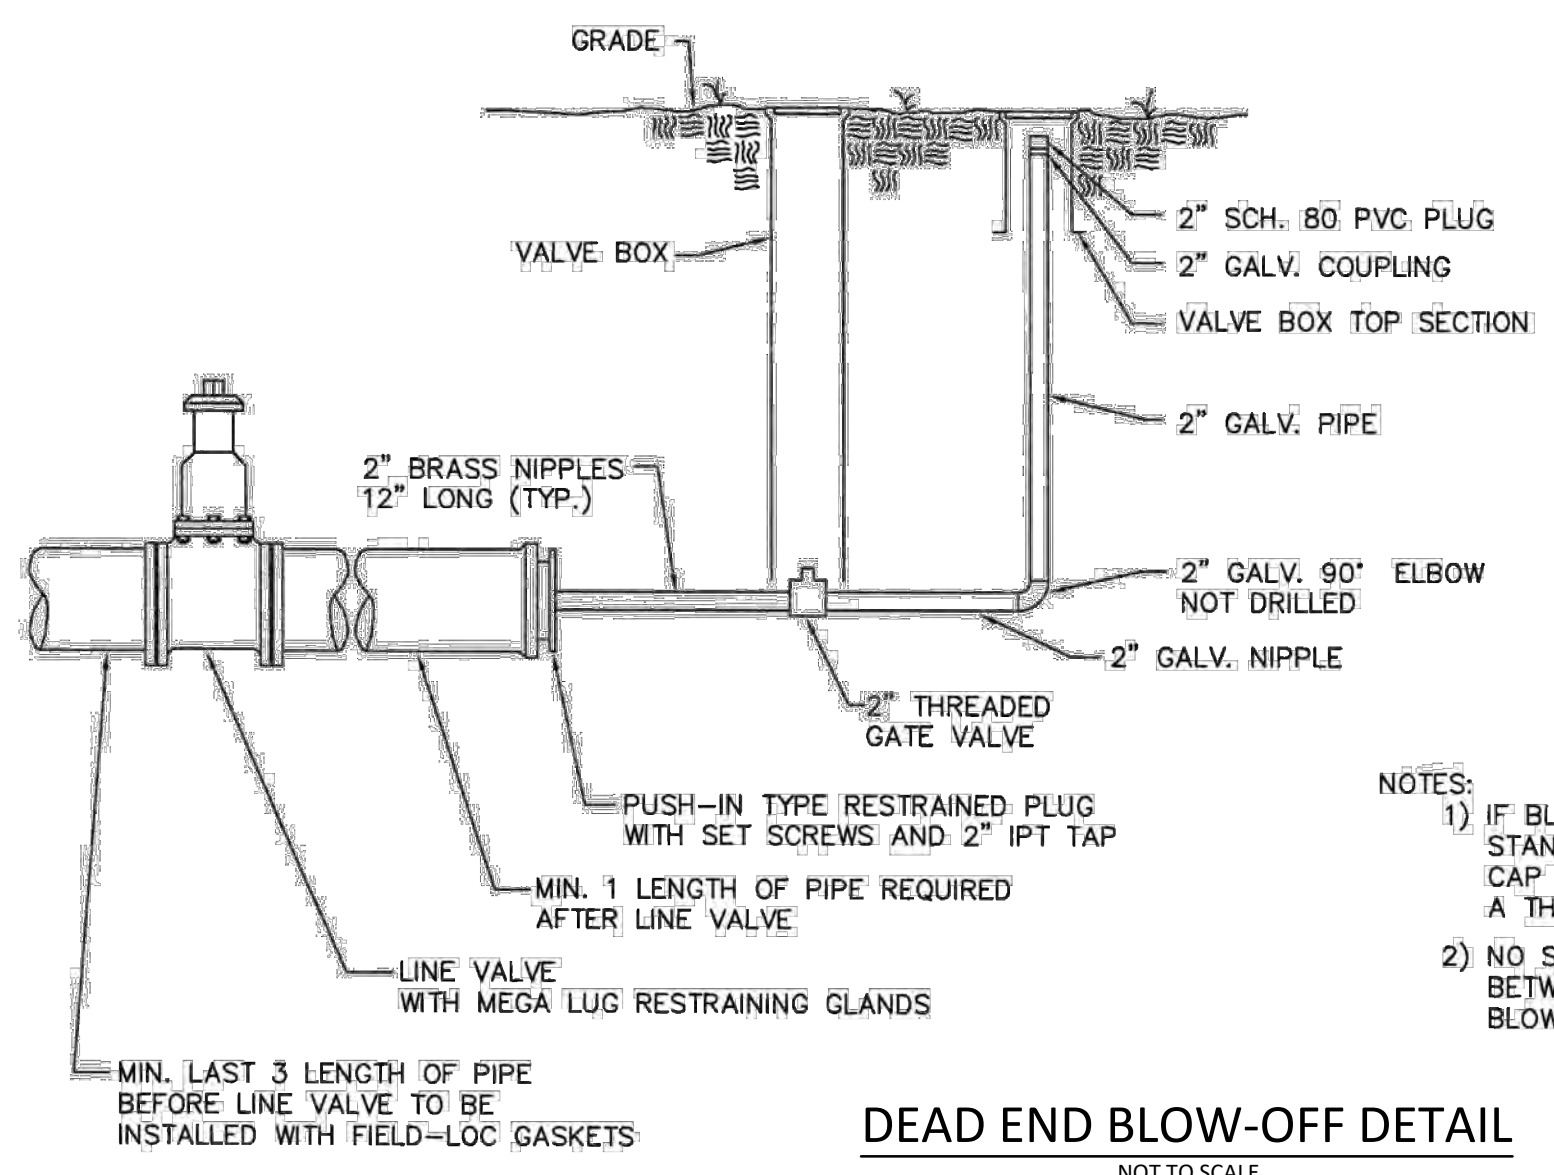


DEAD END BLOW-OFF DETAIL
NOT TO SCALE


- NOTES:
- 1) IF BLOW-OFF IS NOT REQUIRED, STANDARD PUSH IN PLUG OR CAP CAN BE INSTALLED WITH A THRUST BLOCK.
 - 2) NO SERVICE CONNECTIONS BETWEEN LINE VALVE, AND BLOW-OFF ASSEMBLY.

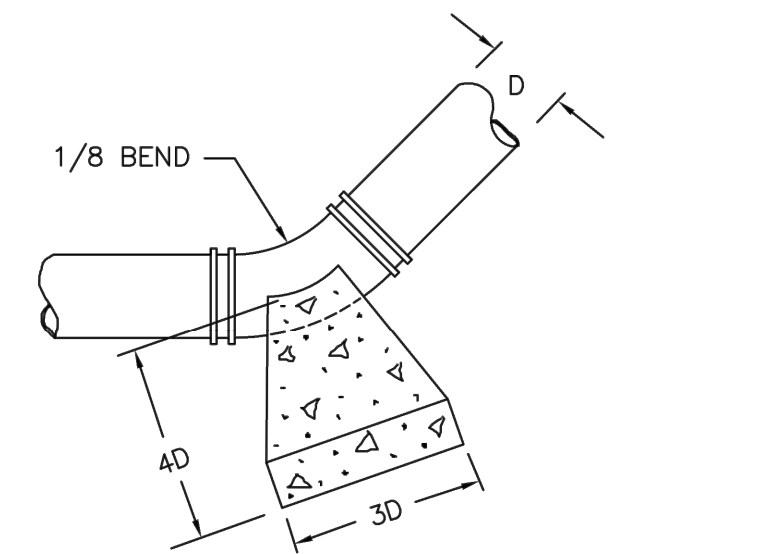

HORIZONTAL THRUST BLOCK DETAIL (PLAN VIEW)

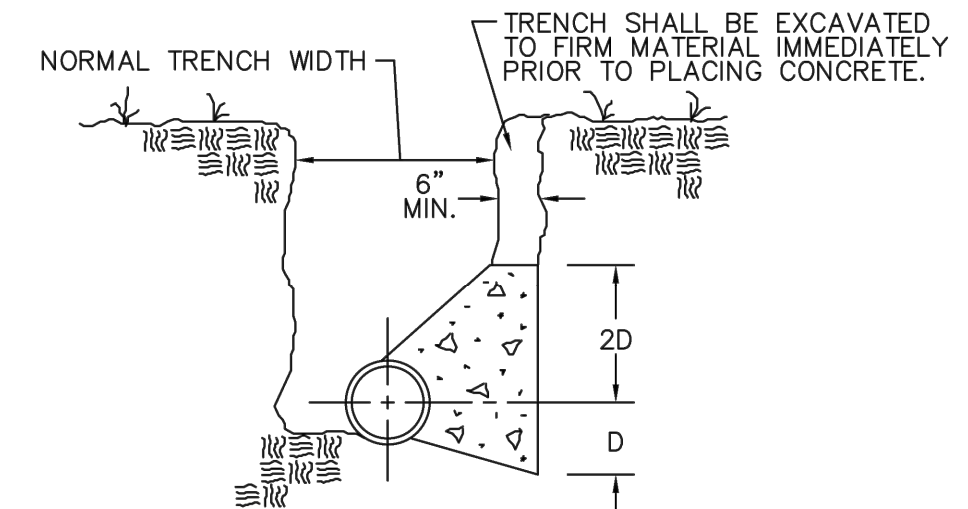


HORIZONTAL THRUST BLOCK DETAIL

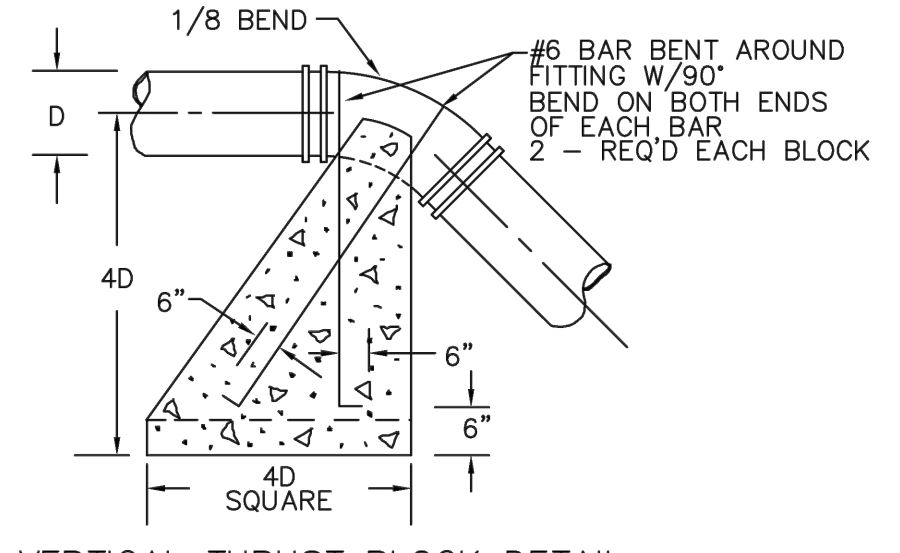

VERTICAL THRUST BLOCK DETAIL

THRUST BLOCK DETAILS
NOT TO SCALE

- NOTES:
- 1) 3000 PSI CONCRETE TO BE USED FOR THRUST BLOCKS.
 - 2) D-DIAMETER OF WATER MAIN.
 - 3) MEGA-LUG RESTRAINING GLANDS SHALL BE USED ON ALL MJ FITTINGS.
 - 4) SOLID CONCRETE BLOCKS WITH WEDGES WILL BE PERMITTED ON MAINS UP TO 10" ALL 12" OR LARGER SHALL BE POURED THRUST BLOCKS.
 - 5) LOCKING GASKETS SHALL BE INSTALLED A MIN. 2 FULL PIPE LENGTHS ON EITHER SIDE OF A BEND.

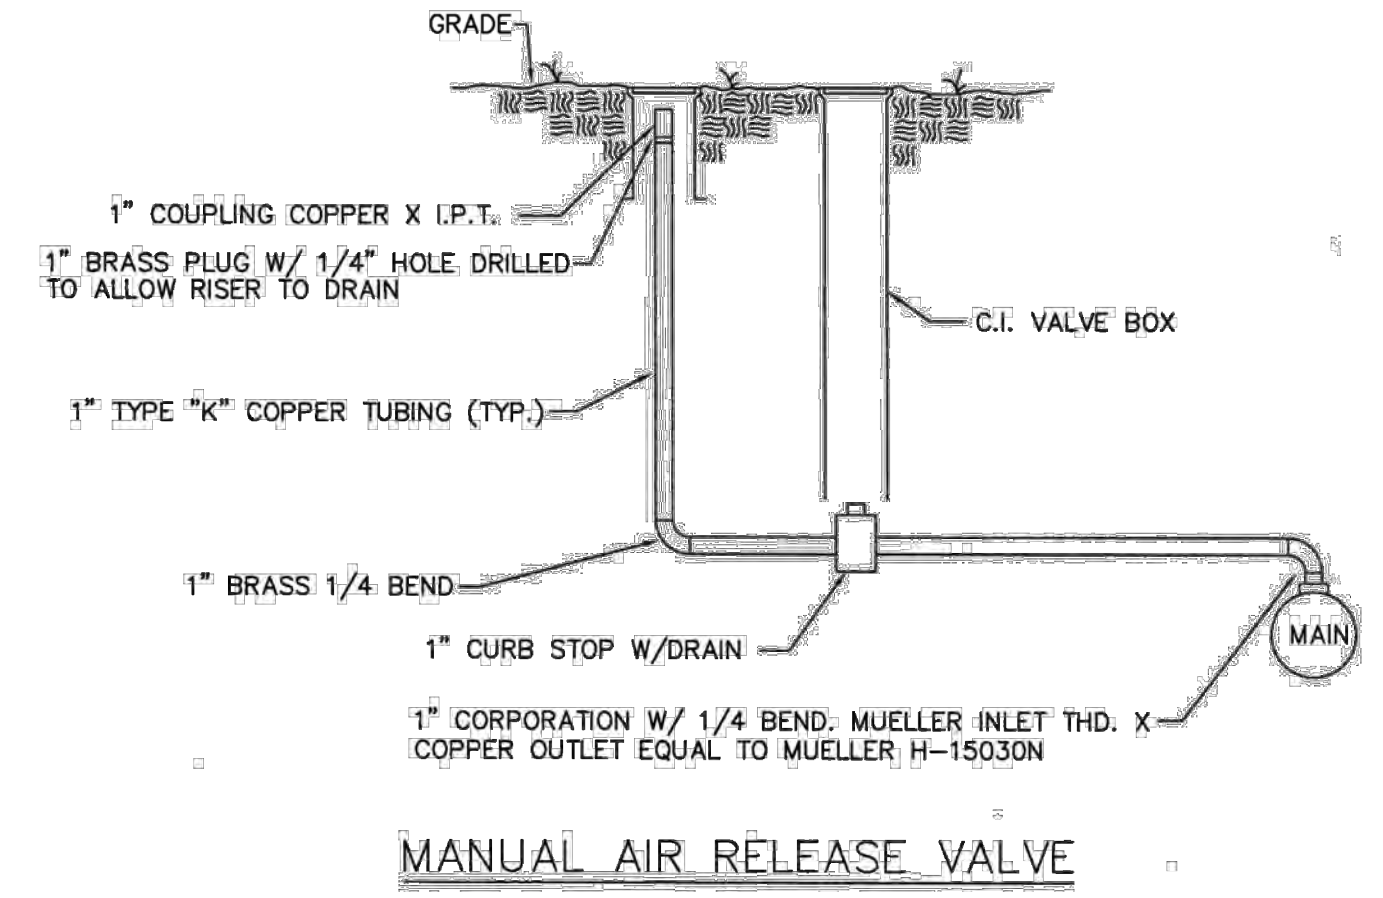

MANUAL AIR RELEASE VALVE

AIR RELEASE DETAIL
NOT TO SCALE

SCALE:	As Noted
DATE:	December 2020
JOB I.D. NO.	20-2853
Revisions	
Rev. A -	IWWC Comments & Stormwater Quality - 1/18/21
Rev. B -	Per IWWC Conditions of Approval - 1/29/21

NOT FOR CONSTRUCTION
1/29/2021

PLAN NOTES
1. SEE COVER SHEET FOR ENGINEER AND SURVEYOR SIGNATURES AND SEALS.
2. SEE SHEET 2 FOR LEGEND & ABBREVIATIONS.

P:\CIVIL 3D PROJECTS\2020\20-2853 EDGEWATER-APARTMENTS\DWG\DESIGN 4 NOTES AND DETAILS.DWG